


INSTALLATION INSTRUCTIONS FOR GENERAL PURPOSE AND MINI-ARC REMODEL HOUSINGS

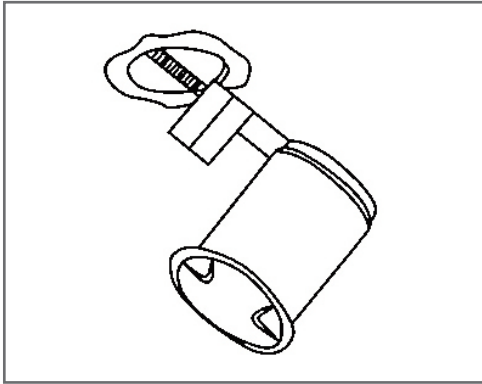

PREPARATIONS AND PRECAUTIONS

WARNING Before starting to work with the electrical supply wires, verify that this circuit's power has been disconnected by switching off its circuit breaker or removing its fuse from the fuse panel. Using a wall switch to turn off the circuit is not sufficient to prevent an electrical shock.

This luminaire must be connected to supply wire rated at 90°C. If you are unable to determine the wire rating, consult a qualified electrician before installing.

INSTRUCTIONS

1. Using supplied template, scribe or draw circle on ceiling in desired location.
2. Accurately cut hole in ceiling using a hole saw of the correct size.
3. Provide electrical service to the J-box using approved flexible cable only.
4. Pull flexible cable through the hole in ceiling.
5. Connect the power cable to the J-box on the fixture in accordance with NEC or local electrical codes.
6. Making sure that the spring retention clips are pushed into the can, push the housing through the hole in the ceiling, J-Box first.
7. Holding the housing flat against the ceiling, push the flat part of the spring retention clip against the inside of the can until you hear a click. Repeat for all clips.
8. The housing should now be firmly installed with no play.
9. You may now install lamp and/or trim
10. To remove the housing, pull retention clip back down.
11. In cases where excessive ceiling vibration may occur, you can use a #1/4-14 x 1/2 pan head sheet metal screw to lock the spring clips in place by driving the screw through the hole in the clip and into the slot in the can.

