

4" GU24 LED

GENERAL PURPOSE & LIGHT COMMERCIAL

MOUNTING METHODS

ENERGY SAVING


ENERGY SAVING RECESSED LIGHTING SOLUTION

CALIFORNIA TITLE 24 COMPLIANT



Easy | Efficient | Elegant

Easy to install... Instant energy savings...
Attractive trim styles and finishes...
Update old fashioned lighting technology.





► LH99ICA-LLF-GU24

QUICK
SHIP



4" NEW CONSTRUCTION IC HOUSING





LED • 24" Adjustable Hanger Bars • Airtight • IC rated • Integral Thermal Protector insures safe installation and operation • Junction Box is listed for through branch circuit wiring (2 in - 2 out) with 1/2" knock-outs • GU24 Socket meets **Title 24** and other standards restricting use of bi-pin and medium base sockets • **ETL Listed** for feed through and damp location.

► LH99RICA-LLF-GU24



QUICK
SHIP

4" REMODEL IC HOUSING



LED • Airtight • IC rated • Integral Thermal Protector insures safe installation and operation • Junction Box is listed for through branch circuit wiring (2 in - 2 out) with 1/2" knock-outs • GU24 Socket meets **Title 24** and other standards restricting use of bi-pin and medium base sockets • **ETL Listed** for feed through and damp location.

► S-GU24-MED



MEDIUM BASE RETROFIT ADAPTER

- Converts Incandescent housings to LED
- Fits medium base 120V socket
- Connects to GU24 lamp base.

4" GU24 LED RECESSED TRIMS | DIMMABLE

4" TRIMS LED





ENERGY STAR QUALIFIED RECESSED LIGHTING

CALIFORNIA TITLE 24 COMPLIANT


- 2700K, 3000K, 3500K, 4000K, 85CRI
- 35,000 hrs. L70 based on TM21 Calculations from LM80 Tests.
- Incandescent/ELV Dimming Standard

- 120V Standard, ETL/cETL Rated , UL Listed
- Medium Base/GU24 Adapter Available
- Damp Location Rated, Wet Location Rated (UL) Option (add -WL to Product code)


Ordering Example: **LREQLD402W-T27**


► LREQLD402	FINISH	VOLTAGE	COLOR TEMP	LUMENS	11W 600Lm
	W : White	Blank : 120V	-T27 : 2700K	Blank : 600Lm (11W)	
	BB : All Black	UE : 120V/277V	-T30 : 3000K		
	N : All Natural		-T35 : 3500K		
			-T40 : 4000K		
SQUARE IN SQUARE TRIM					

Ordering Example: **LRESQLD402W-T27**

► LRESQLD402	FINISH	VOLTAGE	COLOR TEMP	LUMENS	11W 650Lm
	W : White	Blank : 120V	-T27 : 2700K	Blank : 650Lm (11W)	
	BB : All Black	UE : 120V/277V	-T30 : 3000K		
	N : All Natural		-T35 : 3500K		
			-T40 : 4000K		
SQUARE TRIM					

Ordering Example: **LREBLD402W-T27**

► LREBLD402	FINISH	VOLTAGE	COLOR TEMP	LUMENS	11W 650Lm
	W : White	Blank : 120V	-T27 : 2700K	Blank : 650Lm (11W)	
		UE : 120V/277V	-T30 : 3000K		
			-T35 : 3500K		
			-T40 : 4000K		
REFLECTOR WITH FLAT LENS					

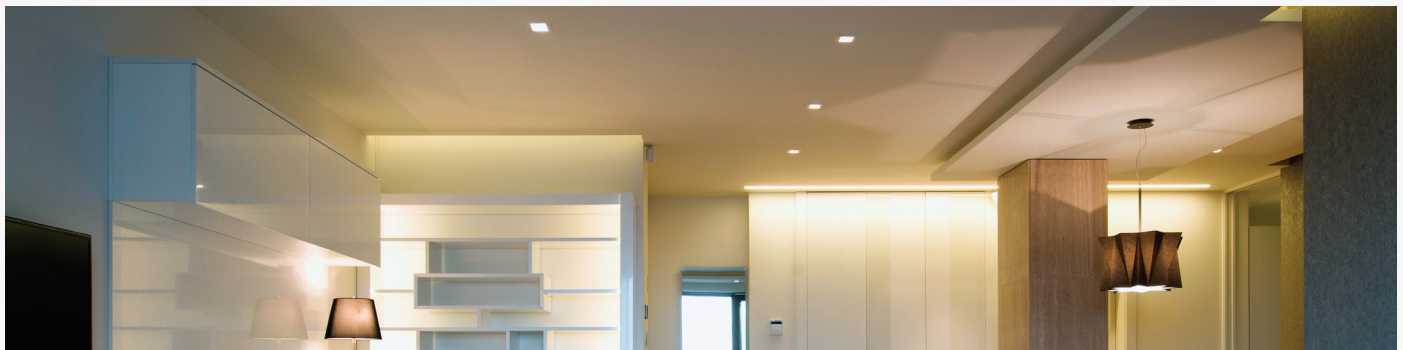

LRELD467


120V | 12W Max. | Lumen Output: 700Lm

4" ADJUSTABLE PULL DOWN

ENERGY SAVING RECESSED LIGHTING

LRELD467


- 3000K, 85CRI Standard, 2700K Option
- 35,000 hrs. L70 based on TM21 Calculations from LM80 Tests.
- Incandescent/ELV Dimming Standard
- Beam Options: 25°, 45° & 60°
- 120V, ETL/cETL Rated
- GU24 Standard, Medium based adapter available

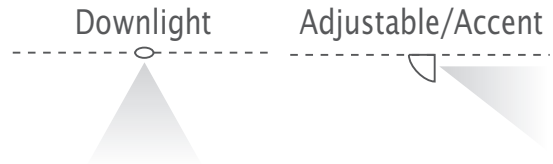

Adjustable LED Pull Down Trim can be used with LITON new construction and remodel housings with a medium base or GU24 socket and is retrofit-able for use with line voltage or GU24 housings. The elbow design provides full horizontal and vertical adjustability allowing it to function as an accent light and a downlight. Lumen output is comparable to a 50W MR16 Lamp.

Easy installation
Fits most LH99 series housings and most 4" 120V housings with a medium or GU24 base.

SQG4-MED adapter required for 120V housing



3-YEAR LIMITED WARRANTY


Single LED Lamp
Eliminates
unsightly image



All Die-Cast
Construction

Low Glare Factor
Fully enclosed lamp eliminates glare from behind and sides
Specification Grade Optics
80+ CRI is standard
Warm Color Temperature
3000 CCT

True MR16 Replacement
12Watts, 700+ lumen package easily exceeds 50W MR16 performance
Dimming Standard
Works with standard incandescent and ELV dimmers
Die-Cast Construction
For lasting durability
Designer Friendly
Available in White, Black & Natural Finishes




Ordering Example: **LRELD467B-B25/SQG4-MED**



ADJUSTABLE PULL DOWN

FINISH	BEAM SPREAD	COLOR TEMPERATURE	OPTIONAL ADAPTER
B : Black	-B25 : Spot	Blank : 3000K	/SQG4-MED : Med. Base Adapter for 120V Retrofit
N : All Natural	-B45 : Flood	-T27 : 2700K	
W : All White	-B60 : Wide Flood	-T35 : 3500K	
		-T40 : 4000K	

12W | 80+ CRI | 700 Lm



FEATURES

- 10W, 800 Lumens, 80 Lumens per watts
- Available in 3000K & 4000K
- 85CRI for Incandescent-like output
- 120V Standard, 120V/277V Option
- 50,000 Hrs. L70 life based on TM21 Calculations from LM80 Tests
- Smoothly dims to 5% using Electronic Low Voltage Dimming systems
- Easily mounts directly to an octagonal J-Box
- Optional Accessories Kit allows installation into 5" & 6" Recessed Housings
- Energy Star Qualified, Title 24 compliant

Frosted Lens

eliminates LED lamp image and provides smooth lumen output similar to CFL

Removable Lens

for easy cleaning



ELV Dimming

Standard (120V only)

120V Standard

120V/277V Option

Retail Packaging

Ships in individual retail packaging, with UPC code



Easily Mounts to

standard octagonal electrical junction box



Adapter Kit

Available for use with 5" and 6" Line Voltage Recessed Housings



Ordering Example: **LCMLD56W-T30**

ORDERING	FINISH	VOLTAGE	COLOR TEMP	ACCESSORY
LCMLD56	W : White	Blank : None	-T30 : 3000K	Blank : None
		UE : 120V/277V	-T40 : 4000K	/LCMLD-RTR: Recessed Housing Adapter