

6" GU24 LED

GENERAL PURPOSE & LIGHT COMMERCIAL

MOUNTING METHODS

ENERGY SAVING

ENERGY SAVING RECESSED LIGHTING SOLUTION

CALIFORNIA TITLE 24 COMPLIANT

GU24 Base
LED Lamp & Trim


GU24 Lamp Socket

Adjustable
Hanger Bars



V-Spring
Mounting Clips

► LH7ICA-LLF-GU24

QUICK
SHIP

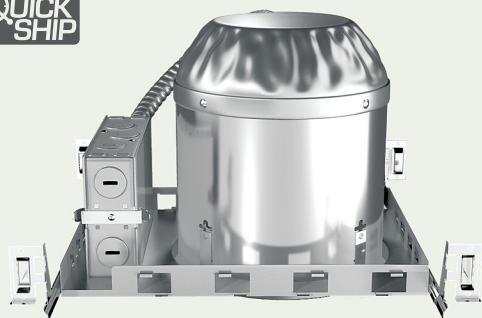

6" NEW CONSTRUCTION IC HOUSING





LED • 24" Adjustable Hanger Bars • Airtight • IC rated • Integral thermal protector insures safe installation and operation • Junction box is listed for through branch circuit wiring (2 in - 2 out) with 1/2" knock-outs • GU24 Socket meets **Title 24** and other standards restricting use of bi-pin and medium base sockets • **ETL listed** for feed through and damp location.

► LH7RICA-LLF-GU24



6" REMODEL IC HOUSING



LED • Airtight • IC rated • Integral thermal protector insures safe installation and operation • Junction box is listed for through branch circuit wiring (2 in - 2 out) with 1/2" knock-outs • GU24 Socket meets **Title 24** and other standards restricting use of bi-pin and medium base sockets • **ETL listed** for feed through and damp location.

► S-GU24-MED



MEDIUM BASE RETROFIT ADAPTER

- Converts Incandescent housings to LED
- Fits medium base 120V socket
- Connects to GU24 lamp base.

6" GU24 LED RECESSED TRIMS

ENERGY STAR QUALIFIED RECESSED LIGHTING CALIFORNIA TITLE 24 COMPLIANT

6" TRIMS LED



Ordering Example: **LREBLD5602W-T27**

► LREBLD5602



FINISH

W : All White

COLOR TEMP

-T30 : 3000K

-T27 : 2700K

LUMENS


Blank : 900Lm (12W)

FEATURES

- 16W, 1100Lm, 85CRI
- Available in 2700K, 3000K, 3500K & 4000K
- 120V Standard input, 120V/277V Option
- 50,000 Hour Life L70 based on TM21 calculations (LM80)
- Fits LITON 5" & 6" Recessed Housings
- For New Construction, Remodel & Retrofit



DIMENSIONS



Ordering Example: **LREBLD5678W-T27**

► LREBLD5678



FINISH

W : All White

B : All Black

COLOR TEMP

-T30 : 3000K

-T27 : 2700K

LUMENS


Blank : 900Lm (12W)

FEATURES


- 12W, 900Lm, 80CRI
- Available in 2700K & 3000K
- 120V Standard input
- 50,000 Hour Life L70 based on TM21 calculations (LM80)
- Fits LITON 5" & 6" Recessed Housings
- For New Construction, Remodel & Retrofit





DIMENSIONS



► LH7 (Medium Base)

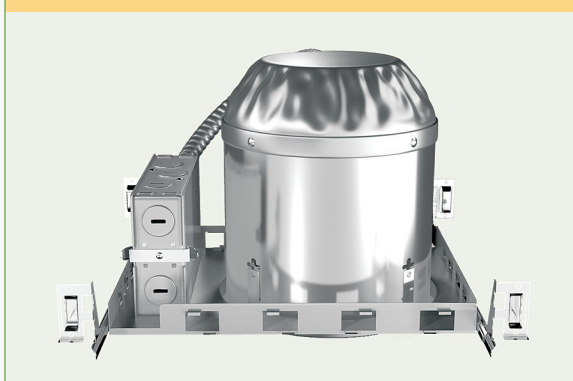

6" NEW CONSTRUCTION IC HOUSING (Medium Base)



LED • 24" Adjustable Hanger Bars • Airtight • IC rated • Integral thermal protector insures safe installation and operation • Junction box is listed for through branch circuit wiring (2 in - 2 out) with 1/2" knock-outs • Medium base Socket meets **Title 24** and other standards restricting use of bi-pin and medium base sockets • **ETL listed** for feed through and damp location.

Ordering Example: **LRLD6W-T27**

► LRLD6



FINISH

W : All White

COLOR TEMP

-T30 : 3000K

-T27 : 2700K

FEATURES

- 120V LED / E26
- Available in 2700K & 3000K
- 120V Standard input
- 50,000 Hour Life L70 based on TM21 calculations (LM80)
- Electronic Direct Current driver mounted on fixture.
- ETL/CETL listed.



DIMENSIONS

