

▶ LED PUCK LIGHT LK136LED SERIES

Liton's LinkaLED Puck Lights are available in Black, White, or Natural. 100 Ft. (Max.) Runs. ETL Listed.

▶ Features & Benefits:

- **LED Remote Driver Options**
Several driver options available. See page 13.
- **Surface or Recessed**
Mounting hardware included.
- **Designed for smooth illumination**
- **Low Glare, Low Heat Emission, Low UV**
- **Rated for 25,000 hours**
2.5 Watts, 184 Lumens, 80+ CRI.
- **Color Temperature**
3,000K
- **Dimmable**
With Remote Dimmable LED Driver.



LK136LED

LINKALED | SURFACE | RECESSED LED PUCK LIGHT

LK136SLEDN



LK136SLEDB



LK136SLEDW




Surface Mount - **LK136SLED**


Recessed Mount - **LK136LED**




► **LK136SLED** | Surface Mount

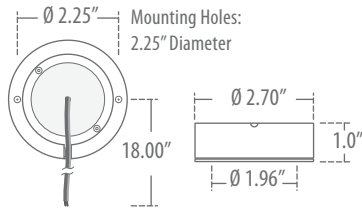

► **LK136LED** | Recessed Mount

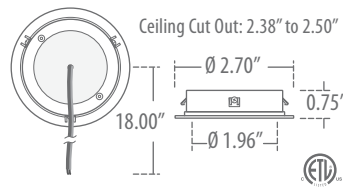

► Zonal Lumen Summary

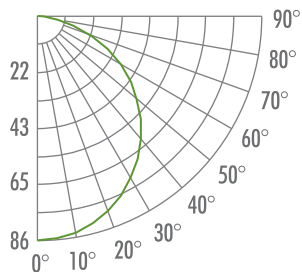

► Footcandles

Distance	Width	Fc
1'	2.0	10.00
2'	2.5	5.00
3'	3.5	2.50
4'	4.0	1.65

► Puck Light LED Ordering

Example: **LK136LEDB**

Catalog#	Finish	Description
LK136LED	W : White	Recessed LED Puck Light
LK136SLED	B : Black	Surface Mounted LED Puck Light
	N : Natural	


► Power Supplies Ordering

Catalog#	Watt.	Dimming	Power Method	Listing	Dimensions	# of Pucks
LD522V024-40-DLV	40W	Magnetic Low Volt.	Hardwire J-Box	ETL	6.50" x 2.62" x 2.25"	1 - 16
LD522V024-100-DLV	100W	Magnetic Low Volt.	Hardwire J-Box	ETL	9.94" x 3.06" x 2.87"	1 - 40
LD522V024-200-DLV	200W	Magnetic Low Volt.	Hardwire J-Box	ETL	7.00" x 3.13" x 3.38"	1 - 80
LD5V24-24-PI	24W	Not Applicable	AC Plug-In	UL	3.82" x 2.16" x 1.54"	1 - 10
LD5V024-60	60W	Not Applicable	Hardwire	UR	8.25" x 1.63" x 1.13"	1 - 24
LD520-C070-15-LTN	15W	Not Applicable	Hardwire	ETL	5" x 5" x 1"	1 - 6


► LinkaLED Puck Light System

- Easy wiring in parallel, just wire nut and go.
- Dimmable using magnetic low-voltage dimmers.
- Singular Optic Lens provides smooth illumination with no visible LEDs.
- Up to 20 pucks per single run, 80 per single driver (observe driver limitations).


► Accessories

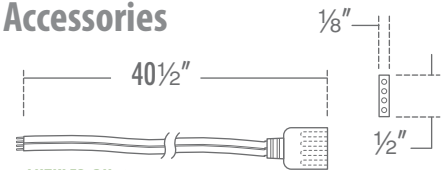

LUTKLED-PH40
Power Feed Connector

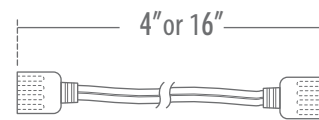

LUTKLED-PC04 / LUTKLED-PC16
In-Line Connector

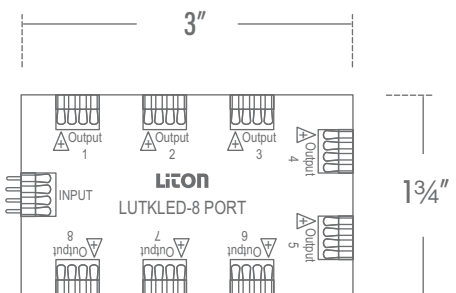

LUTKLED-PX8
8-Port Power Hub (LUTKLED-PH40 Included)

► Accessories Ordering

Catalog#	Description	Length
LUTKLED-PH40	End Feed Connector	40.5"
LUTKLED-PC16	Power Connector	16.0"
LUTKLED-PX8	8-Port Power Hub	