


AG2340 : AG2-SERIES

4" ROUND SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 1500LM (10W-15W)

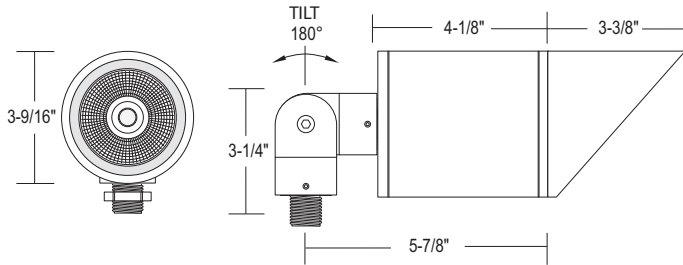

AG2340 Shown with
Glare Shield Option (-SH)



- Design consistency with WD/DL/BL2 Series
- Variety of mounting methods
- 120-277V/347V Input options
- Optional field adjustable Variable Beams, CCTs, and dimming options
- Wireless and wired RGBW options available (12W)
- Glare shield for eye comfort
- Weep holes for water drainage

ORDERING : AG2340W-L15-B10UE-D10-T27-JB-CRD/AG2-T-W

AG2340

Fixture	Finish	Lumen	Beam Spread	Dimming	LED	Mounting	Options	Accessories	Color Finish
Finish		Beam Spread			LED		Accessories		
White	AG2340W	Wide Flood	Blank	4000K (90 CRI)	Blank	GROUND Installation			
Black	AG2340B	8° Mini Spot	-B08 ^{1,9}	2700K (90 CRI)	-T27	None	Blank		
Bronze	AG2340BZ	Narrow Spot	-B10	2700K (97 CRI)	-T27-C97	Ground Spike	/AG2-SPK		
Silver	AG2340S	Spot	-B20	3000K (90 CRI)	-T30	Ground Spike, AC	/AG2-SPK-AC		
Light Silver	AG2340LS ¹⁰	Flood	-B45	3000K (97 CRI)	-T30-C97	WALL/CEILING/TREE Installation ⁵			
Dark Grey	AG2340DG ¹⁰	Asymmetric (30° x 60°)	-B3060 ¹	3500K (90 CRI)	-T35	T-Connector	/AG2-T		
Metallic Gold	AG2340MG ¹⁰	Variable Beam (20° - 45°)	-BVR ¹	5000K (80 CRI)	-T50	L-Connector	/AG2-L		
Metallic Black	AG2340MB ¹⁰			RGB+W Control (24VDC)	-RGBWV24 ^{1,2,8}	Stem Coupler	/AG2-CPL		
Lumen		Dimming		Mounting		6" Stem	/AG2-STM06		
1000lm (10W)	Blank	Non-Dimming (120V)	Blank	Direct	Blank	12" Stem	/AG2-STM12		
1500lm (15W)	-L15	UniDim™ (120V/277V)	UE-DUN	Flat Plate, Surface Mount	-PL	18" Stem	/AG2-STM18		
		0-10V (120V/277V)	UE-D10	Junction Box	-JB	24" Stem	/AG2-STM24		
		Triac Dimming (120V)	-DIN	Options ^{3,4}	None	36" Stem	/AG2-STM36		
		0-10V 1% (120V/277V)	UE-D10P1			Tree Strap	/AG2-TREE		
						ROUND POLE MOUNT Installation			
						Tenon Reducer Hub	/AG2-TRH-1/2		
						EMERGENCY OPTIONS Installation			
						None	Blank		
						Face Mount EM	/AG2-EMB		
						Back Pack			
						Empty Back Pack	/AG2-EMB BLANK ⁷		
						Color Finish ⁶			
						White	-W		
						Black	-B		
						Bronze	-BZ		

<

¹ Special Order. Minimum order, extended lead times may apply. Consult Factory.

² Remote power supplies and control gear required. Available with wireless bluetooth or DMX control. Consult factory for details.

³ Cable (-CRD) not available with stem and mounting.

⁴ Custom cable lengths available. Consult Factory.

⁵ Custom stem lengths available. Consult Factory.

⁶ Color finishes of accessories do not apply for AG2-SPK or AG2-SPK-AC.

⁷ Blank EM enclosure available for non-EM units to provide a seamless design.

⁸ (-TAM) 590nm Amber (Turtle Safe) and (-RGBWV24) RGB+W control is only available with Wide Flood (Blank) Beam Spread.

⁹ (-B08) Mini Spot not available with LED option (-T50) 5000K, 80 CRI.

¹⁰ Special Order Finish. Minimum order quantity (MOQ) applies. Orders less than MOQ are subject to a special paint set-up fee for the quantity ordered. Extended lead times may apply. Consult Factory.

Custom RAL Color: Please note that we appreciate custom finishes. Custom finishes are subject to a special paint setup fee for the quantity ordered. Extended lead times may apply. Consult Factory.

SPECIFICATION

Mounting Options

DIRECT - STANDARD	PLATE	JUNCTION BOX
• 1/2" IPS Nipple and Nut (<i>Stainless Steel</i>) • For direct install and fastening with Nipple and Nut • Direct surface install for Line Voltage Input	• Φ 4.75" Flat Mounting Plate (8 Ga, 0.125" thk Aluminum) • For install directly to 4" Octagonal Junction Box • Plate Install for Line Voltage Input • Consult Factory for Custom Stem and Cord Lengths	• Die cast waterproof aluminum JBOX included • 4" Octagonal Jbox (with Mounting Tabs @ 4.25" Hole-to-Hole) • x5 1/2" Knockouts for Conduit Feeds • JBOX Install for Line Voltage Input • Consult Factory for Custom Stem and Cord Lengths

DIRECT MOUNT - STANDARD



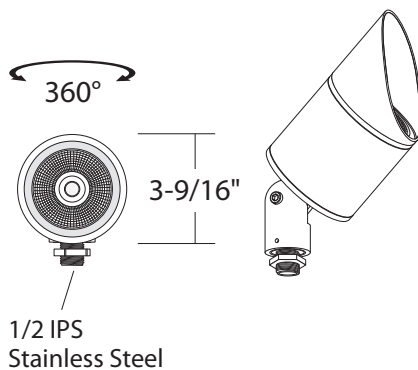


PLATE MOUNT

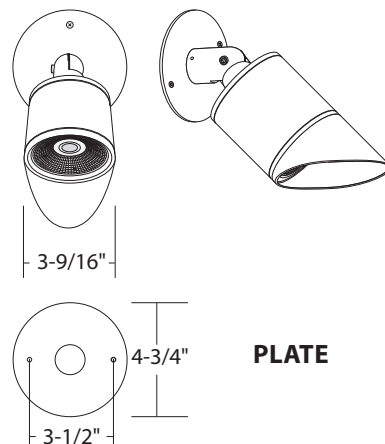


JUNCTION BOX

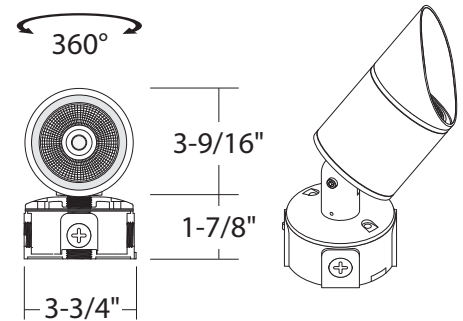

Cable and Glare Shield

AG2340-CRD-SH

- Aluminum Shields/Visor for Glare Control
- 18/3 Ga Jacketed PVC Cord (36" Standard length)
- Glare Shield and cable option pre-installed to fixture
- Consult factory for custom cable lengths
- Shield is equipped with weep holes for water drainage

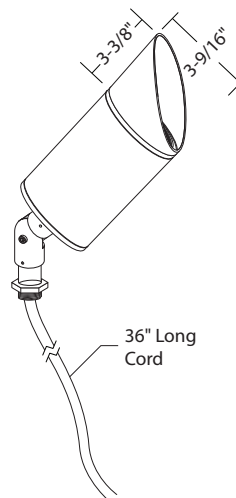


SPECIFICATION (Continued)

Accessories - In-Ground Mount


SPK

(Ground Spike for installation in-ground)




SPK-AC

(Ground Spike for installation and wiring in-ground)

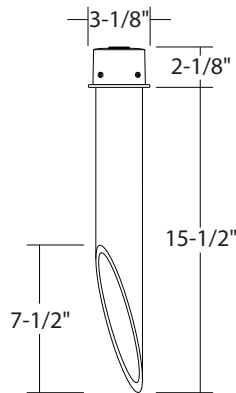

AG2-TRH-1/2


(1/2" IPS Tenon Reducer for mounting on 2-3/8" pole)

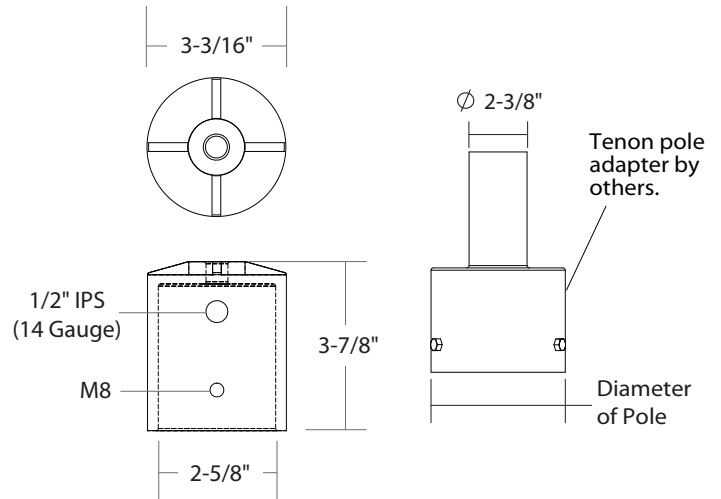

Accessories - Surface Mount & TREE


AG2-T

(T-Connector, 1/2" IPS Internally Threaded)




AG2-L

(L-Connector, 1/2" IPS Internally Threaded)




AG2-CPL

(1/2" IPS Stem Coupler)




AG2-STMxx

(1/2" IPS Externally Threaded Stems; 14 Threads per pitch, 16 Gauge)



AG2-TREE

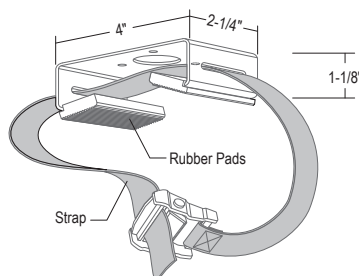

SPECIFICATION (Continued)

BackPack Face Mount (/AG2-EMB)

Eliminates need for long runs back to remote emergency battery location. Installs directly on building surface. Ideal for locations wanting same mounting aesthetics for Emergency and Non-Emergency fixtures without the use of remote Emergency power. Can be fed from recessed wall mounted junction box from the back of fixture.

- Wet location rated.
- 120V-347V operation.
- Self diagnostic.
- Integral surge protector for emergency driver only.
- Includes (2) 1/2" NPT knock-outs.
- Optional /EMB-BLANK can be used to maintain a common aesthetic when /AG2-EMB are used.




Input Voltage:	120-347 Vac (50/60 Hz)
Input Power:	7 Watts
Output Voltage:	170 V DC
Input Current:	100mA
Output Power:	18W
Surge Protection:	Line-Neutral 3000V
EM Operation:	90 minutes
Charge Time:	24 hour recharge
Ambient Temperature:	0°C to + 50°C (30°F to 122°F)
Weight:	3.7 lb
Rating:	cUL
Self-Diagnostic	YES


MODE	TEST SWITCH	INDICATOR STATUS	COMMENT
AC MODE 1	NOT PRESSED	ON (no flash)	EM DRIVER is CHARGING
AC MODE 2	PRESSED ONCE	2s ON THEN 2s OFF (slow flashing)	EM DRIVER is running 30s DIAGNOSTICS test
AC MODE 3	PRESSED TWICE [2s] in sequence	2s ON THEN 2s OFF (slow flashing)	EM DRIVER is running 90min DIAGNOSTICS test
EM MODE 1	NOT PRESSED	2s ON THEN 2s OFF (slow flashing)	EM DRIVER IS OUTPUTTING EM CONSTANT POWER LOAD
EM MODE 2	PRESSED ONCE		EM DRIVER IS OFF

When indicator flashes (0.2s) ON and then 0.2s (OFF) quickly or turns off, unit is defective. Contact manufacturer.

10W, 15W

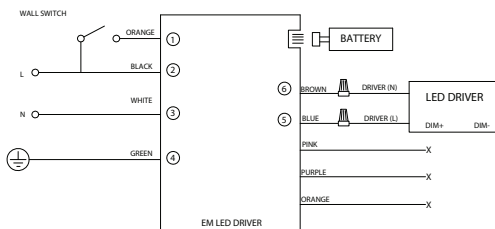

10W, 15W (Dimmer)

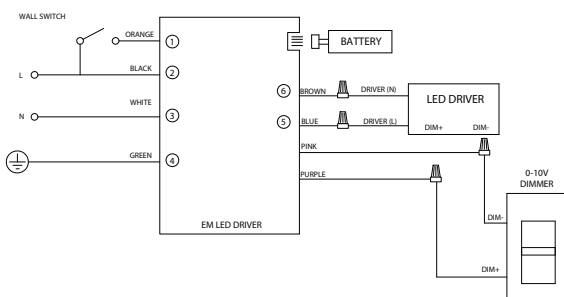

NOTE: WHEN LED FIXTURE POWER IS MORE THAN 18W LED FIXTURE MUST BE EQUIPPED WITH 0-10V DIMMABLE DRIVER


SPECIFICATION (Continued)

Typical Combinations

Fixture with Stem

Items shown:


- AG2-STMxx
- AG2-CPL
- AG2340

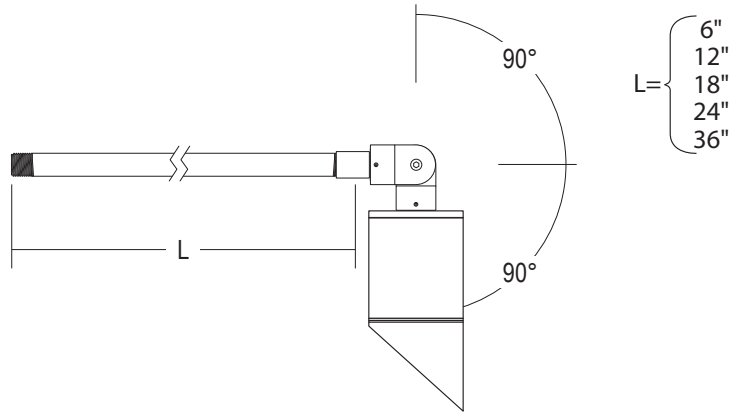

L-connector with Stem

Items shown:


- AG2-STMxx
- AG2-L
- AG2-CPL
- AG2340

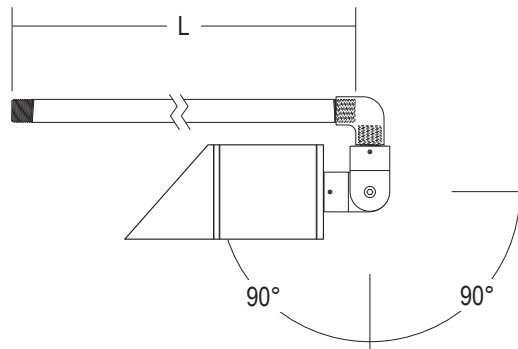

T connector with Stem

Items shown:

- AG2-STMxx
- AG2-T
- AG2-CPL
- AG2340

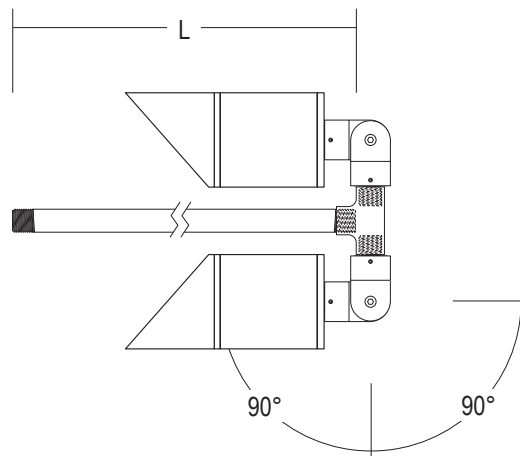

SPECIFICATION (Continued)

Application

The AG series above-grade floodlight is suitable for surface ceiling, surface wall, or pendant stem mounts in both interior and outdoor settings. The die-cast joint allows for 180° tilt and 360° swivel adjustability to create several configurations.

Electrical

LED Driver: AC 50/60Hz Electronic Direct Current Class 2 driver integrally mounted.

Power Factor > 0.90. See Dimming Section for voltage and wiring.

Minimum Operating Temperature:

Standard: -10°C/14°F


Housing

Housing is constructed from a square one piece high grade aluminum extrusion. (Alloy 6061 <04% Cu). Faceplate (with a tempered glass lens) and top cap are of a robust die-cast aluminum alloy and are secured to the housing with (4) socket head tamper resistant stainless steel screws and seal the housing (top and bottom) using silicone gaskets.

Mounting:

A mounting bracket attaches to or over a recessed J-Box (by others) and has through holes to accept (4) four countersunk phillips head screws in the top edge of the fixture housing.

Finish:

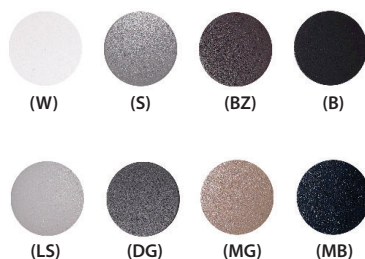

A 7-stage electrostatic, polymer process provides an outdoor textured powder coat finish that delivers outstanding durability, superior anti-aging, resistance to corrosion and UV-degradation. Consult factory for Custom Color. (More Information)

Standard Finishes:

White: RAL 9003 (W)
Silver: RAL 7037 (S)
Bronze: RAL 8019 (BZ)
Black: RAL 9005 (B)

Special Order Finishes:

Light Silver: RAL 7036 (LS)
Dark Gray: RAL 7015 (DG)
Metallic Gold: RAL 1001 (MG)
Metallic Black: RAL 7021 (MB)

Certifications and Listings:



ETL / cETL Listed to UL1598 and UL8750 standards.

Suitable wet locations. (IP65)

Assembled in USA.

IK08 rated for impact resistance.

SPECIFICATION (Continued)

Caution: LITON recommends use of surge protectors on the power entering light fixture.

Warranty


Covered by a 5-year Warranty to be free of defects in materials and craftsmanship.
Fixture should not be installed in applications with ambient temperature above 50°C/122°F.
Doing so will result in reduced lamp life and voided warranty.

Optics

Multifaceted aluminum reflector produces low glare illumination with multiple light control options.

Standard Beam:

Used for maximum light output and visible field angle.

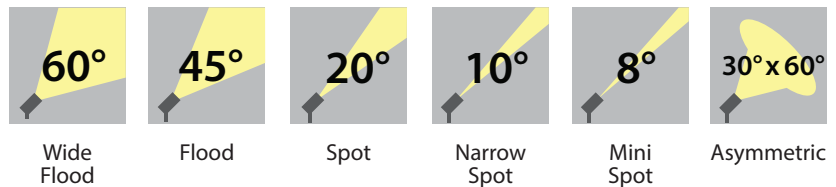

LED

COB (Chip on Board) singular LED light source provides for smooth, uniform light output, eliminating the imaging produced by multiple LED source optics.

Lumen Maintenance:


Lumen Maintenance is a minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Lumen Options (Nominal):

1000lm (10W) (Blank)
1500lm (15W) (-L15)

Color Temperature:

Binned with 4-step MacAdam ellipses as per ANSI Standard recommendation.



COLOR TEMP: 2700K 3000K 3500K 4000K 5000K
CRI: 90, 97 90, 97 90 90 80

Amber: 590nm (Turtle Safe)

SPECIFICATION (Continued)

RGB+W:




CASAMBI

15W RGBW LED Module Illuminates surfaces up to 10 feet away. Used for applications desiring a dynamic color changing effect. RGB+W design allows fine-tuned pastel colors and saturated hues without sacrificing illumination brightness. Can be set for static colors or dynamic shows. Multiple control options available with either CASAMBI Wireless Bluetooth control or DMX 512 remote mounted decoders.

On-site commissioning and programming available.


Consult Factory for Layout Assistance and Lead Times.

COLOR	CCT/WAVELENGTH	POWER
Red	640nm	3.1W
Green	520nm	3.1W
Blue	450nm	3.1W
White	2700K	3.1W

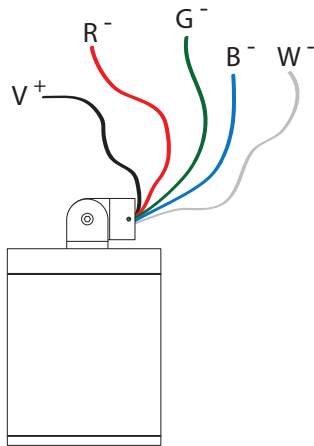


WIRED

Remote Power Supply	Controls	Wattage
LD5-RGBW-RMTJBX	Remote Mounted Decoder -DMX512	15W -W15
	Wireless Bluetooth Control -CASAMBI	30W -W30
		60W -W60
		96W -W96

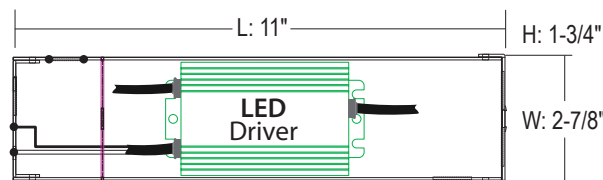

Junction Box Dimensions: 11" x 2-7/8" x 1-3/4" (LxWxH)

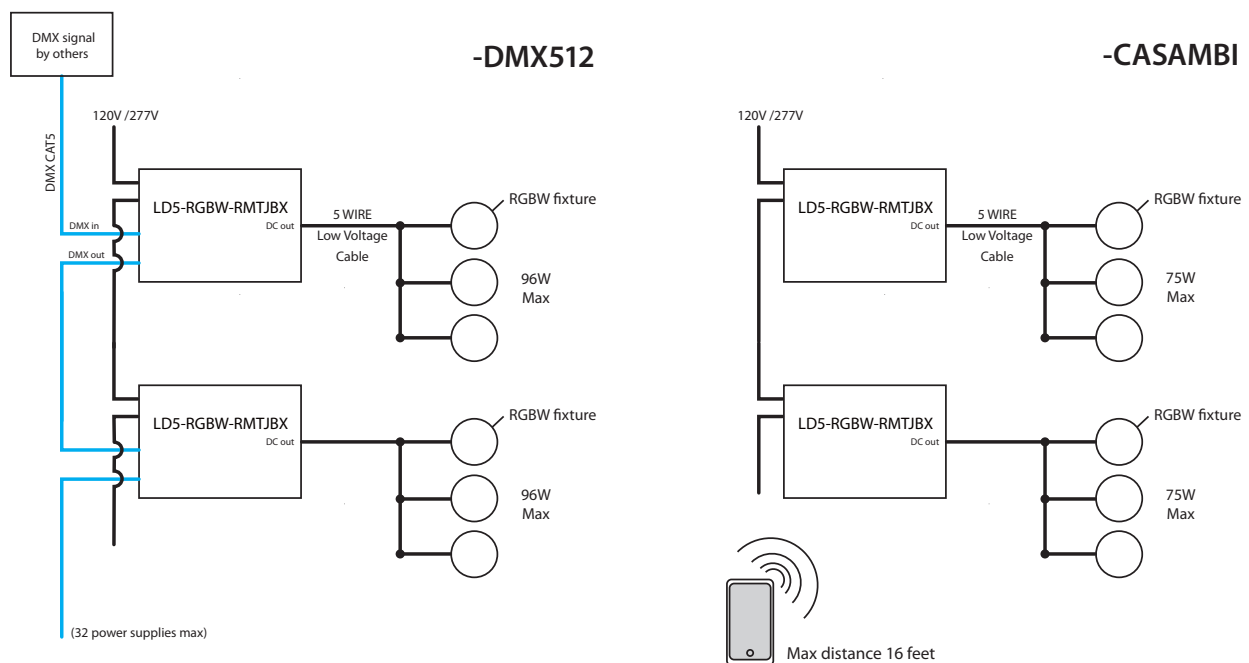

NOTE: Power supply must be placed in dry locations only. 100 feet max for 5 wire low voltage cable 18AWG.

SPECIFICATION (Continued)

Dimming Options

ELV and TRIAC Driver 120V (-DIN):

Compatible with electronic low voltage, and 2-Wire incandescent dimmers. Also known as leading edge, Reverse Phase, Forward Phase dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations.


0-10V Driver 120V/277V (UE-D10):

Compatible with most existing 0-10V systems. Also known as fluorescent or 5-Wire dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations. Compatible with daylight harvesting controls.


UniDim™ Driver 120V/277V (UE-DUN):

All in one ELV and TRIAC phase dimming (120V only), and 0-10V dimming (120V/277V). Works with most 3-Wire ELV, 2-Wire incandescent and 120V/277V 5-Wire 0-10V fluorescent dimmers.


Incandescent/Phase Wiring
ELV

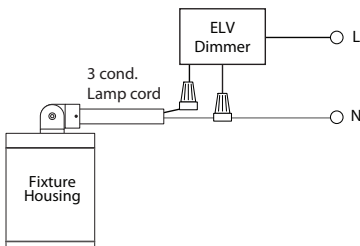


0 - 10V Wiring

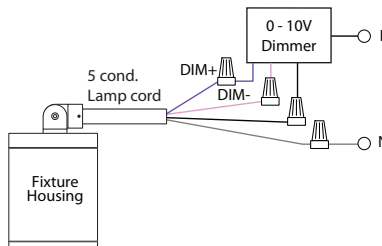


Incandescent/Phase Wiring
ELV

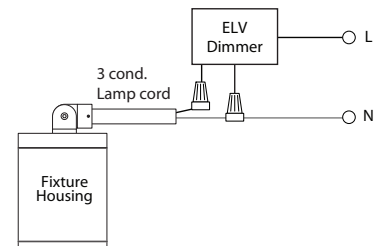


TRIAC

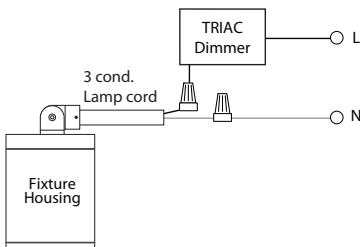

TRIAC

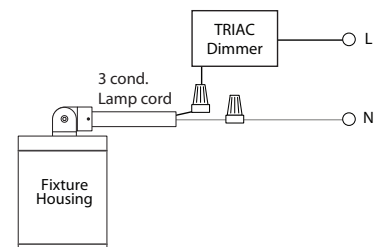

0 - 10V Wiring

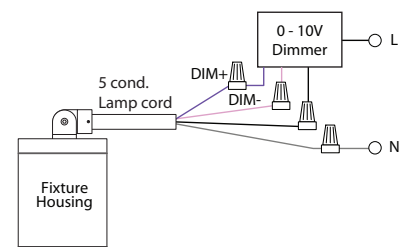

AG2340 : AG2·SERIES


4" ROUND SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 1500LM (10W-15W)

PHOTOMETRY

AG2340BZ-L15UE-DUN (1500lm, 15W, Wide Flood, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	12/2023	CCT	
Beam Angle 50%:	47.0°	2700K	0.88
Field Angle 10%:	77.7°	3000K	0.92
Color Temperature:	4139K	3500K	1.00
CRI:	93.4	4000K	1.00
Lumens Delivered:	1367	5000K	1.00
CBCP:	1972.2	-TAM	0.21
Power Factor:	0.93	LUMENS	
Input Voltage:	120V	1000lm (Blank)	0.72
		1500lm (L15)	1.00

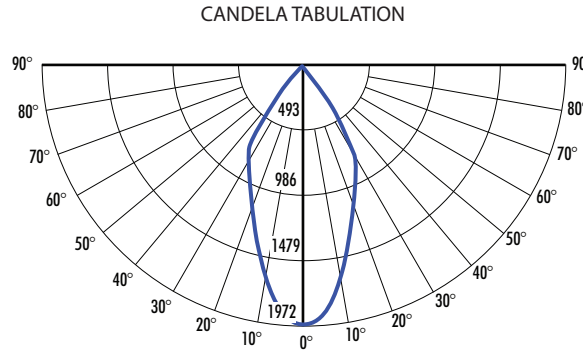


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
31.0'	27.0'	2
16.0'	13.9'	8
15.0'	13.0'	9
14.0'	12.2'	10
12.0'	10.4'	14
10.0'	8.7'	20
8.0'	7.0'	31
6.0'	5.2'	55
5.0'	4.4'	79
4.0'	3.5'	123

AG2340BZ-L15-B08UE-DUN (1500lm, 15W, Mini Spot, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	03/2024	CCT	
Beam Angle 50%:	8.1°	2700K	0.89
Field Angle 10%:	15.3°	3000K	0.93
Color Temperature:	3966K	3500K	0.97
CRI:	90.4	4000K	1.00
Lumens Delivered:	855	LUMENS	
CBCP:	31338.6	1000lm (Blank)	0.73
Power Factor:	0.99	1500lm (L15)	1.00
Input Voltage:	120V		

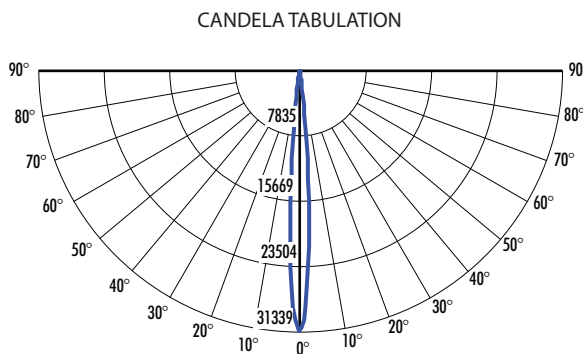


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
125.0'	17.7'	2
16.0'	2.3'	122
15.0'	2.1'	139
14.0'	2.0'	160
12.0'	1.7'	218
10.0'	1.4'	313
8.0'	1.1'	490
6.0'	0.9'	871
5.0'	0.7'	1254
4.0'	0.6'	1959

AG2340BZ-L15-B10UE-DUN (1500lm, 15W, Narrow Spot, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	12/2023	CCT	
Beam Angle 50%:	14.5°	2700K	0.88
Field Angle 10%:	29.3°	3000K	0.92
Color Temperature:	4138K	3500K	1.00
CRI:	93.4	4000K	1.00
Lumens Delivered:	1558	5000K	1.00
CBCP:	12478.6	-TAM	0.21
Power Factor:	0.93	LUMENS	
Input Voltage:	120V	1000lm (Blank)	0.73
		1500lm (L15)	1.00

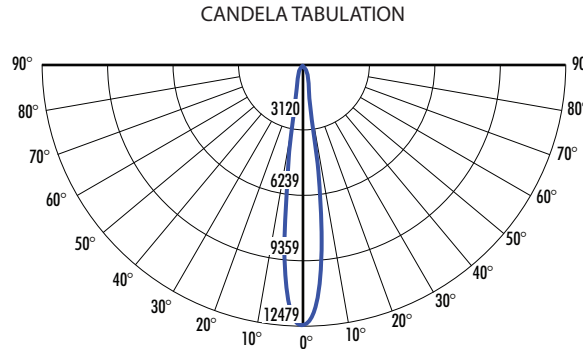


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
79.0'	20.1'	2
16.0'	4.1'	49
15.0'	3.8'	55
14.0'	3.6'	64
12.0'	3.1'	87
10.0'	2.5'	125
8.0'	2.0'	195
6.0'	1.5'	347
5.0'	1.3'	499
4.0'	1.0'	780

AG2340BZ-L15-B20UE-DUN (1500lm, 15W, Spot, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	12/2023	CCT	
Beam Angle 50%:	14.7°	2700K	0.88
Field Angle 10%:	27.5°	3000K	0.92
Color Temperature:	4150K	3500K	1.00
CRI:	92.6	4000K	1.00
Lumens Delivered:	1544	5000K	1.00
CBCP:	13155.12	-TAM	0.21
Power Factor:	0.93	LUMENS	
Input Voltage:	120V	1000lm (Blank)	0.74
		1500lm (L15)	1.00

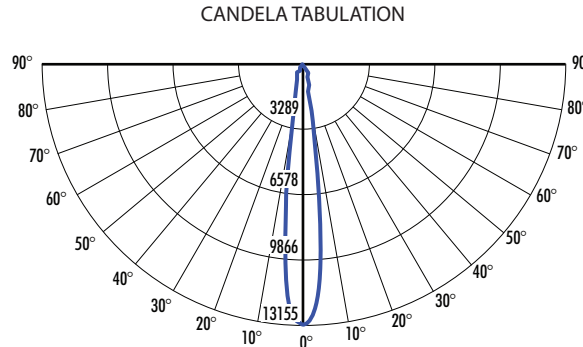

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
81.0'	20.9'	2
16.0'	4.1'	51
15.0'	3.9'	58
14.0'	3.6'	67
12.0'	6.1'	91
10.0'	2.6'	132
8.0'	2.1'	206
6.0'	1.6'	365
5.0'	1.3'	526
4.0'	1.0'	822

AG2340 : AG2·SERIES


4" ROUND SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 1500LM (10W-15W)

PHOTOMETRY (Continued)

AG2340BZ-L15-B45UE-DUN (1500lm, 15W, Flood, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	12/2023	CCT	
Beam Angle 50%:	30.4°	2700K	0.88
Field Angle 10%:	68.8°	3000K	0.92
Color Temperature:	4151K	3500K	1.00
CRI:	93.5	4000K	1.00
Lumens Delivered:	1556	5000K	1.00
CBCP:	3873.22	-TAM	0.21
Power Factor:	0.92	LUMENS	
Input Voltage:	120V	1000lm (Blank)	0.72
		1500lm (L15)	1.00

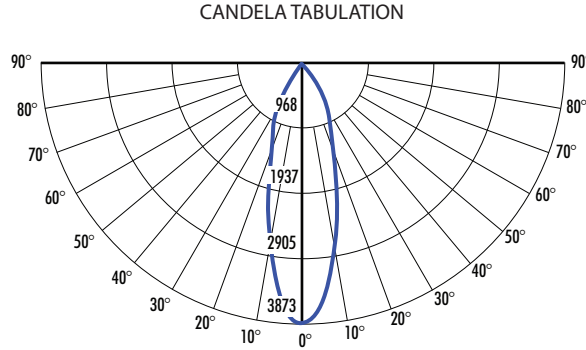


FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
44.0'	23.9'	2
16.0'	8.7'	15
15.0'	8.2'	17
14.0'	7.6'	20
12.0'	6.5'	27
10.0'	5.4'	39
8.0'	4.4'	61
6.0'	3.3'	108
5.0'	2.7'	155
4.0'	2.2'	242

AG2340BZ-L15-B3060UE-DUN (1500lm, 15W, 30°x60°, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	12/2023	CCT	
Horizontal	62.7°	2700K	0.88
Beam Angle 50%:		3000K	0.92
Vertical	36.7°	3500K	1.00
Beam Angle 50%:		4000K	1.00
Horizontal	106.6°	5000K	1.00
Field Angle 10%:		-TAM	0.21
Vertical	80.2°	LUMENS	
Field Angle 10%:		1000lm (Blank)	0.73
Color Temperature:	4155K	1500lm (L15)	1.00
CRI:	93		
Lumens Delivered:	1534		
Lumens:	1540		
CBCP:	1746.30		
Power Factor:	0.92		
Input Voltage:	120V		

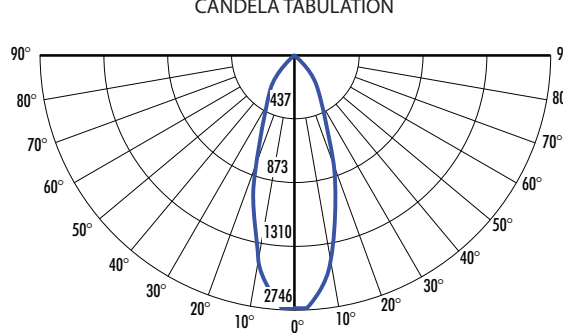


FOOTCANDLE DISTRIBUTION

Height	Beam Width	FC
29.0'	35.3'	2
16.0'	19.5'	7
15.0'	18.3'	8
14.0'	17.1'	9
12.0'	14.6'	12
10.0'	12.2'	17
8.0'	9.8'	27
6.0'	7.3'	49
5.0'	6.1'	70
4.0'	4.9'	109

AG2340BZ-L15-BVRUE-DUN (1500lm, 15W, Variable Beam, 4000K)

System Power:	15W	MULTIPLIERS	
Test Date:	02/2024	CCT	
Beam Angle 50%:	22.3°	2700K	0.88
(Min. Zoom)		3000K	0.92
Beam Angle 50%:	44.7°	3500K	1.00
(Max. Zoom)		4000K	1.00
Field Angle 10%:	44.0°	5000K	1.00
(Min. Zoom)		-TAM	0.21
Field Angle 10%:	76.5°	LUMENS	
(Max. Zoom)		1000lm (Blank)	0.73
Color Temperature:	4023K	1500lm (L15)	1.00
CRI:	93		
Lumens Delivered:	1063lm		
(Max. Zoom)			
Lumens Delivered:	1098lm		
(Min. Zoom)			
CBCP:	1664.57		
(Max. Zoom)			
CBCP:	5248		
(Min. Zoom)			
Power Factor:	0.99		
Input Voltage:	120V		

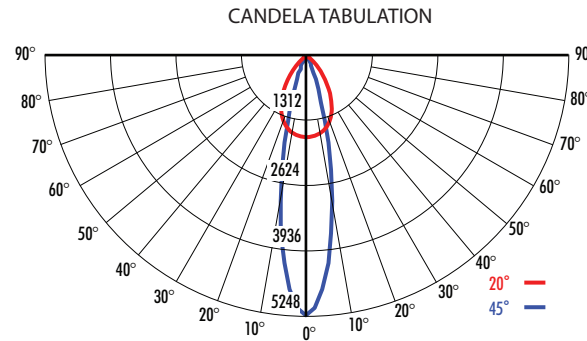

FOOTCANDLE DISTRIBUTION – 4" Variable Beam

Beam Angle	Height	Beam Diameter	Footcandle
25° 20° 15° 10° 5° 0° 5° 10° 15° 20° 25°		Min. Max.	Min. Max.
	50'	19.7' 41'	2 n/a
	40'	15.8' 33'	3 n/a
	30'	11.8' 25'	6 2
	20'	7.9' 16'	13 4
	15'	5.9' 12'	23 7
	10'	3.9' 8'	52 16
	8'	3.2' 7'	81 26
	6'	2.4' 5'	146 45
	5'	2.0' 4'	207 66
	4'	1.6' 3'	323 103