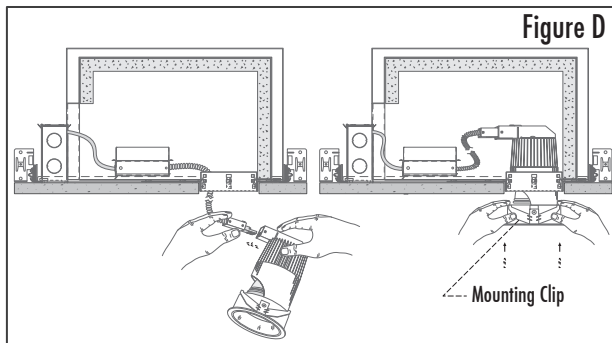
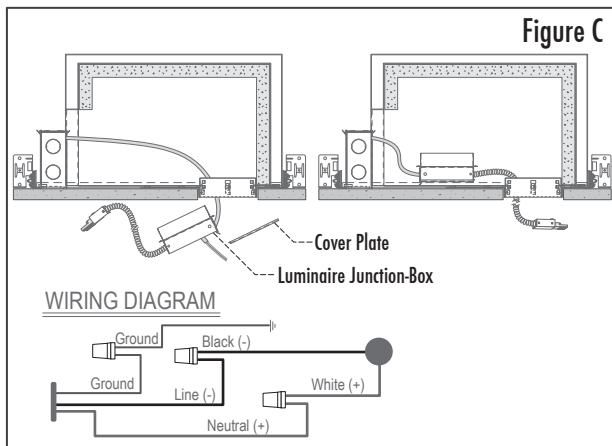
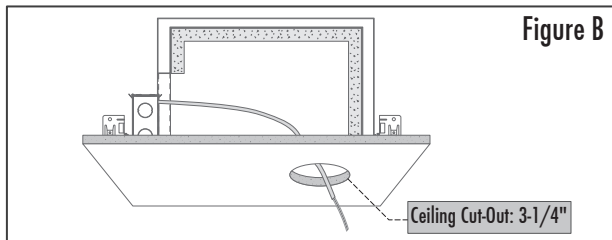
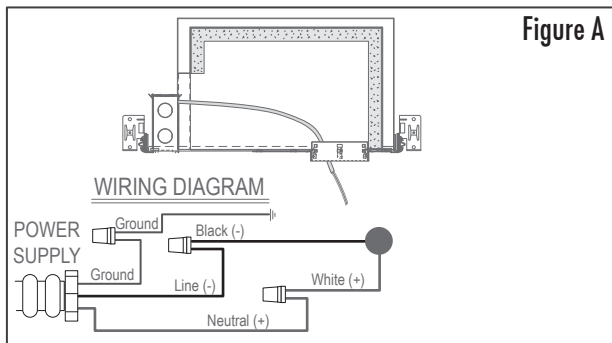


INSTALL AND USE THIS LUMINAIRE FOLLOWING YOUR LOCAL ELECTRICAL CODES AND REGULATIONS.

PREPARATION:

- 1). Read and understand instructions completely before installing this luminaire. If you are unfamiliar with electrical wiring have a qualified licensed electrician install this luminaire for you.
- 2). Before proceeding the installation, be sure that the ceiling construction follows the proper requirements . See (FIG. B) as per your reference.

CAUTION!

Ceiling insulation must be kept a minimum of 3" away from the sides of the housing. No insulation allowed on the top. Install housing at a minimum of 1/2" away from combustible material such as wooden ceiling joists, sub-flooring or roofing.

A) INSTALL RECESSED HOUSING:

- 1). Mount frame bars to ceiling joist using the hanger bars (provided). Ensure frame opening is in desired location by adjusting the hanger bars (see FIG. A).
- 2). Make power Connections in junction box, see Wiring Diagram use twist type wire connectors (by others) suitable for the size, type and number of wires.

B) CEILING CUT-OUT:

- 1). Install ceiling material and make hole, trace circle on ceiling in desired location. Cut hole accurately at 3.25" Diameter or Square (see FIG. B).

C) ELECTRICAL CONNECTIONS:

- 1). **WARNING-** Before starting the wire connections, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse panel. Turning the power off using the light switch is not sufficient to prevent electrical shock.
- 2). This luminaire must be connected with supply wire rated at 90° C. Most dwellings built before 1985 have supply wire rated at 60° C; consult a qualified electrician before installing this luminaire.
- 3). Connect the power source to the luminaire junction box. Then, Make power Connections, (see FIG. C) Wiring Diagram and use wire connectors (provided).
- 4). After completing the wiring (be sure the wires are placed within the wiring box), replace J-Box Cover Plate (see FIG. C).

D) INSTALL LUMINAIRE HOUSING:

- 1). Connect the Luminaire by joining the Quick Connectors, see Figure D. Then, insert luminaire into the housing opening.
- 2). Press the Mounting Clips and insert into the Opening fully until the clips will hold the Trim in place, (see FIG. D).

E) FINAL INSTALLATION:

- 1). (see FIG. E).