

CATALOG # : VR800 : 8" Vandal Resistant Kit (OVER LRALD8 DOWNLIGHT)

SAVE THESE INSTRUCTIONS

Keep these instructions in a safe place for future use/reference.

Important: Please read and understand all instructions completely before installing this fixture.

WARNING: Fixture installation (and use) and all electrical connections must be in accordance with local and National Electrical Codes (N.E.C.) rules, regulations and standards. If you are unfamiliar with installing fixture(s), accessories and/or electrical wiring have a qualified licensed electrician install this fixture for you. Fixture should be installed by a qualified electrician.

WARNING: RISK OF SHOCK. House electric current can cause painful shock or serious injury.

WARNING: Always disconnect power before fixture installation, wiring, or maintenance.

WARNING: Before starting the wire connections, disconnect the power by turning off the circuit breaker or removing the fuse at the fuse panel. Turning the power off using the light switch is not sufficient to prevent electrical shock.

This luminaire must be connected with supply wire/conductors rated at 90°C. Most dwellings built before 1985 have supply wire rated at 60°C; consult a qualified electrician before installing.

WARNING: Before service insure fixture is cool to touch.

WARNING: Check fixture for input voltage before connecting power to fixture.

WARNING: RISK OF SHOCK. This fixture is suitable for dry and damp locations. Also for use with covered ceiling mount.

WARNING: Do not install any fixture or assembly (etc.) closer than 6" from any curtain, or similar combustible material.


Fixture must be installed on a circuit protected by Ground Fault Circuit Interrupter (GFCI).

Install LED fixture(s)/LED driver(s) only on their own circuit. Do not mix any other products (Incandescent, Compact Fluorescent, H.I.D. products/fixtures, etc...) with LED fixture(s)/LED driver(s) on a single circuit.


Do not use any other electrical equipment (example: surge protector photocell, etc.) that is not (rated) for use with LED fixture(s)/LED driver(s) on the same circuit as LED fixture(s)/LED driver(s).

Install remote surge protector(s) (by others, goes on the circuit with nothing between the surge protector and the LED fixture(s)/LED driver(s)), if the fixture is not already installed with a surge protector, to help remove power surges that may harm LED fixture(s), appropriate for the installation. Periodically check and make sure that your remote surge protector(s) are in good working order.

Components / Parts

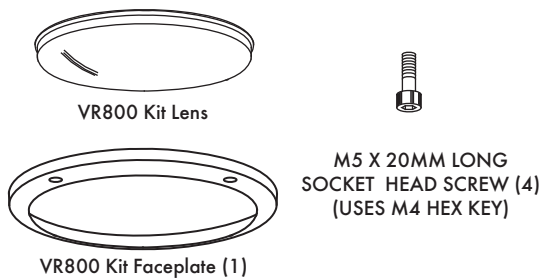


Components Dimensions

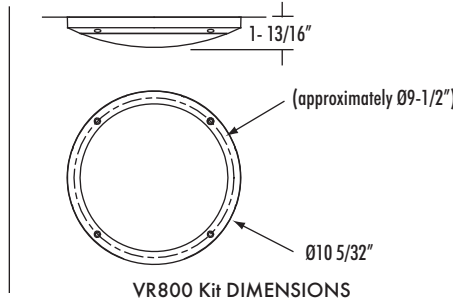

Tools Required

- M4 ALLEN KEY (BY OTHERS)
- Hardware (screws, nuts, etc.)
- DO NOT USE POWER TOOLS
- ONLY USE HAND TOOLS

FIG. 1

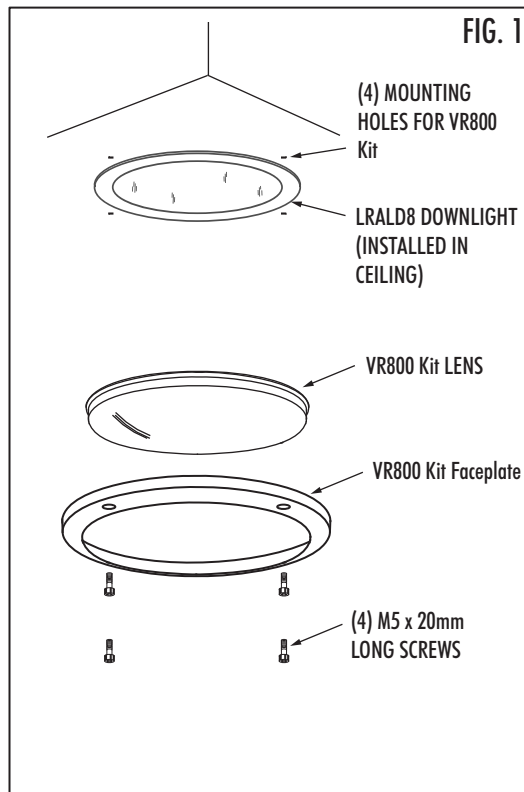

FIXTURE INSTALLATION

1. Install LRALD8 downlight fixture per instructions.
2. VR800 Kit takes four (4) M5 x 20mm Long socket head screws (supplied).
3. Use VR800 Kit Faceplate to mark mounting location on covered ceiling as required (see Figure 1).
4. Use supplied M5 screws (or use other screws, by others) to mount faceplate and lens to ceiling.
5. Install four (4) mounting hardware (studs, etc., by others) in ceiling.
6. Secure VR800 Kit Faceplate and Lens over LRALD8 installed housing on ceiling (see Figure 1) using screws.
7. Make sure faceplate fits completely over LRALD8 housing and screws are tightened securely and evenly. Do not over tighten screws.

For relamping or wiring of LRALD8 see LRALD8 instructions