


LCMLD56AC : 6" LUMEN DISC

DRIVER-LESS AC SURFACE MOUNT DOWNLIGHT 1100LM (15W)

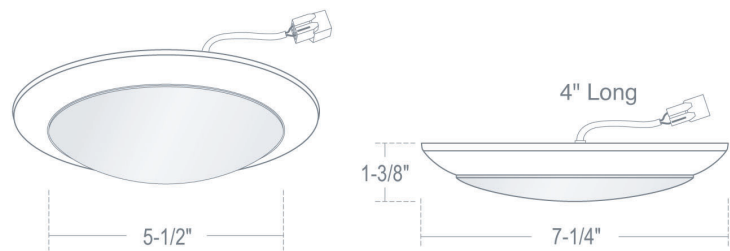

Ready To Ship

Damp Location

Wet

Outdoor

Dedicated LED

Ambient Light

Downlight

ETL LISTED US Intertek

120V

Title 24 JA-8

- Removable translucent lens for easy cleaning.
- White polycarbonate diffuser eliminates hot spots creating uniform light distribution.
- Die Cast Construction for Indoor/Outdoor use.

ORDERING : LCMLD56AC-T27

LCMLD56AC					
Fixture	Voltage	Color Temperature		Accessory Options	
Voltage	Blank	Color Temperature		Accessory Options	
120V		2700K	-T27	None	Blank
		3000K	-T30	Recessed Housing Adapter	/LCMLD-RTR
		3500K	-T35		
		4000K	-T40		
		ColorSelect 3000K 3500K /4000K	-TS354		

SPECIFICATION

Application

6" General Purpose Surface Mount Downlight is perfect for Retrofit, New, Construction and Remodel Applications in low to medium height ceilings. Heavy duty diecast construction for Indoor/Outdoor installations.

LED Details

- 15W 1100 Lumen Package
- Color Rendering Index (CRI) : (90CRI)
- Lamp Equivalent: 65W BR30
- Color Temperature: 2700K, 3000K, 3500K, 4000K

Dimming

Standard Low Voltage dimming option works with most standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, VELV-300P, NELV-450 along with 3-Way versions. Smoothly dims down as low as 10% of initial light output with flicker-free operation.

Thermal Management

Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver

Electronic Direct Current driver mounted on fixture. Smoothly dims down to 5% with standard Low Voltage dimmers.

Color Temperature

Available with Colorselect 3000K, 3500K, 4000K and with standard 2700K. 3000K, 3500K, and 4000K. LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Safety Labels

ETL/CETL listed. NYC approved: Calendar #41937. High Efficacy Luminaire Certified by the California Energy Commission (CEC) as Title 24 / JA8 Compliant.

Warranty

Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and voided warranty.

Wet Location

Suitable for Wet Location Installations.

Title 24/JA8 Compliant

- LCMLD56AC_-TS354