


LCMLD56 - 6" SURFACE MOUNT LUMEN DISC SURFACE MOUNT DOWNLIGHT

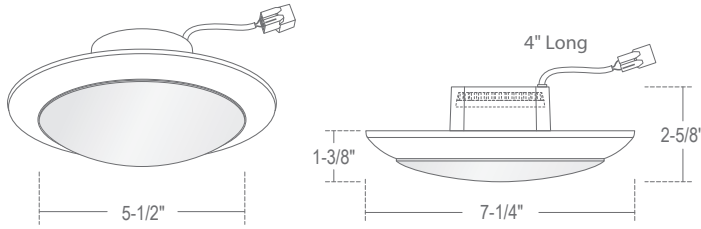

SPECIFICATION

LED

Application: 6" General Purpose Surface Mount Downlight is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Adapter available for 120V medium base Housings.

Mounting: Universal mounting hardware allows mounting to all standard octagonal electrical junction boxes. Optional Recessed Housing Adapter available.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture. Smoothly dims down to 5% with standard Low Voltage dimmers.

Color Temperature: Comes with 2,700K, or 4,000K LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Safety Labels: ETL/CETL listed. NYC approved: Calendar #41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Certification: This LED product is certified as compliant with California's Title 24 Energy Efficiency Standards by the California Energy Commission.

Wet Location: Suitable for Wet Location Installations.

Accessory: Available in and Recessed Housing Adapter.

COMPATIBILITY

 LH5 STANDARD NEW CONSTRUCTION HOUSING	 LH5R STANDARD REMODEL HOUSING	 LH7 6" NON IC HOUSING
 LH7R REMODEL E26 HOUSING		

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 800 Lumen Package
 Color Rendering Index (CRI) : 90+
 Color Temperature: 2,700K, 4,000K
 Lamp Equivalent: 65W BR30

Benefit:

- Easily mounts to standard octagonal junction box.
- Removable translucent lens for easy cleaning.
- Adapter available for 5" & 6" recessed housings.

FEATURE:



ORDERING EXAMPLE : LCMLD56UE-T27

LCMLD56	VOLTAGE	COLOR TEMP OPTIONS	ACCESSORY
LCMLD56	Blank :120V	-T27 :2700K	Blank :None
UE	:120V/277V	-T40 :4000K	/LCMLD-RTR :Recessed Housing Adapter

2021.02.18