


LCMLD9 - 9" SURFACE MOUNT LUMEN DISC SURFACE MOUNT DOWNLIGHT

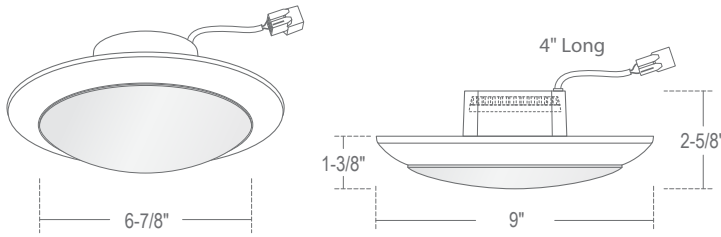

SPECIFICATION

LED

Application: 9" General Purpose Surface Mount Downlight is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Adapter available for 120V medium base Housings.

Mounting: Universal mounting hardware allows mounting to all standard octagonal electrical junction boxes. Optional Recessed Housing Adapter available.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture. Smoothly dims down to 5% with standard Low Voltage dimmers.

Color Temperature: Comes standard with 3,000K Warm White or 4,000K Cool White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Safety Labels: ETL/CETL listed. NYC approved: Calendar #41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Certification: This LED product is certified as compliant with California's Title 24 Energy Efficiency Standards by the California Energy Commission.

Wet Location: Suitable for Wet Location Installations.

Color Temp: Available in 4000K, and ColorSelect 2700K, 3000K, 3500K, 4000K, 5000K switch.

Accessory: Available in and Recessed Housing Adapter.

LED Details:

16W 1300 Lumen Package

Color Rendering Index (CRI) : 90

Color Temperature: 4000K

Lamp Equivalent: 120W BR30

Benefit:

- Easily mounts to standard octagonal junction box.
- Removable translucent lens for easy cleaning.
- 120V-277V Option
- Dims down to 5% with Triac Dimmers
- 1,300 Delivered Lumens (3,000K) (80 lm/w)
- 90+ CRI

FEATURE:



ORDERING EXAMPLE : LCMLD9UE-T40

LCMLD9		VOLTAGE	COLOR TEMP		ACCESSORY
LCMLD9	Blank	:120V (2-Wire Incandescent Dimming)	-T30	:3000K**	Blank :None
	UE	:120V/277V	-T40	:4000K	/LCMLD-RTR:Recessed Housing Adapter
			-S2750	:2700K/3000K/ 3500K/400K/5000K*	

*0-10V Dimming Only

**LCMLD9-T30 - DISCONTINUED