


LH1299IC - NEW CONSTRUCTION (IC) 2" LOW VOLTAGE DOWNLIGHT HOUSINGS

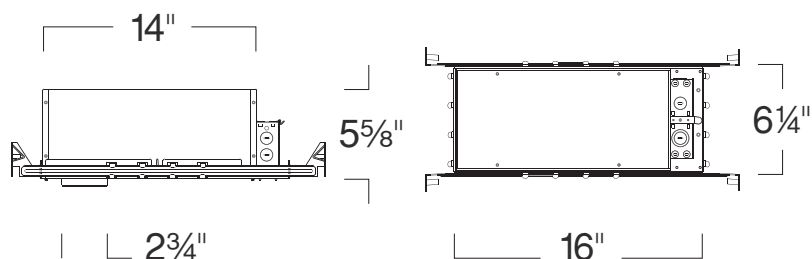

SPECIFICATION

12V Out 37W Max MR11/MR16

Application: General purpose recessed downlight housing for low to medium height ceilings for residential and light commercial applications. A variety of trims, compatible styles and finishes are available to achieve the desired décor and illumination.

Housing: Pre-wired .05" baked enamel 1-piece drawn steel housing adjusts up to 3/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured with torsion wing springs.

Transformer: Class 2 Noise-Free Electronic transformer installed adjacent to Junction Box, bottom and top accessible. Dimmable with dimmers designed for Electronic Low Voltage Loads. Thermally protected rated for 90° C.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Insulation Contact: IC rated housing rated for direct contact with low to medium density loosefill blown and rolled insulation. For use with high density loosefill blown insulation, reduce rated lamp wattage accordingly (roughly %15-%20).

Safety Labels: ETL/CETL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

COMPATIBILITY

 LR1203 CROSS BLADE	 LR1211 MR11 REFLECTOR	 LR1218 MICRO EYEBALL
 LR1266 MICRO GIMBAL DIE-CAST	 LR1221 MR16 REFLECTOR	 LR1267 MICRO PULL DOWN
 LR1213 MR11 BAFFLE	 LR1219 MICRO PINHOLE W/ BLACK REFLECTOR	 LR1293 MR16 BAFFLE
 LRSQ1211 MR11 SQUARE TRIM		

Note: Wattage limitations on compatible items must be met.

FEATURE:



LH1299IC	OPTION	ACCESSORIES
LH1299IC	A :37W Airtight IC	/LBL20 :20W Derating /LBL35 :35W Derating

ORDERING EXAMPLE : LH1299IC

ID#: 1140