


LH7RLV - REMODEL HOUSING 120V/277V

6" LOW VOLTAGE HOUSINGS

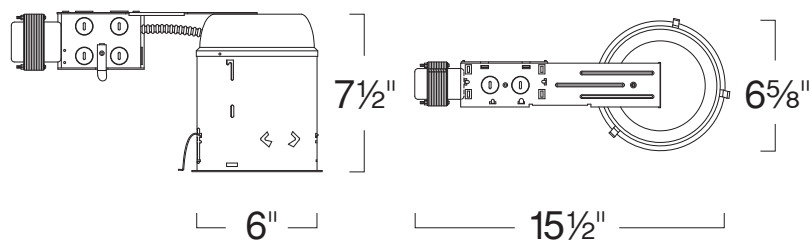

SPECIFICATION

12V 75W Max MR16 GU5.3

Housing: Pre-wired housing adjusts up to 1 1/4" ceiling thickness. This housing has torsion remodeling clips for secure installation. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with torsion wing springs/standard coil springs. Designed to be installed in existing sheet rock ceilings via ceiling cut out (above ceiling access is not required).

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Transformer: Class H insulated magnetic transformer installed adjacent to Junction Box, bottom and top accessible. Thermally protected rated for 90° C

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: UL/CUL listed for through-branch wiring (8) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Label: cETL Listed

COMPATIBILITY

 LR2625 WALL WASH W/ REFLECTOR	 LR2677 ADJUSTABLE AR111 W/ BAFFLE	 LFB2012 FIRE BARRIER
 LR2616 ADJUSTABLE REFLECTOR	 LR2645 WALL WASH W/ BAFFLE	 LR2657 SUPER ADJUSTABLE PULL DOWN
 LR2610 ADJUSTABLE SPOT W/ BAFFLE	 LR2675 ADJUSTABLE PAR36 W/ BAFFLE	 LR2676 ADJUSTABLE PAR36 W/ REFLECTOR
 LR2678 ADJUSTABLE AR111 W/ REFLECTOR	 LR2698 ADJUSTABLE PULL DOWN W/ SNOOT	 LR2630 ADJUSTABLE BAFFLE
 LR2650 ADJUSTABLE SLOT	 LR2691 REFLECTOR W/ NARROW APERTURE	 LR2693 BAFFLE W/ NARROW APERTURE

Please see website for more compatible items.

FEATURE:



Note: Wattage limitations on compatible items must be noted.

ORDERING EXAMPLE : LH7RLV

LH7RLV	RATING	WATTAGE	VOLTAGE	ACCESSORIES
LH7RLV	Blank :Standard	Blank :50W -75 :75W	Blank :120V/12V -27 :277V/12V (Electronic*)	/LBL20 :20W Derating /LBL35 :35W Derating

* Available with 120V/277V Magnetic Option, consult factory.

ID#: 140