


LH800 - ARCHITECTURAL HOUSING

8" ARCHITECTURAL INCANDESCENT HOUSINGS

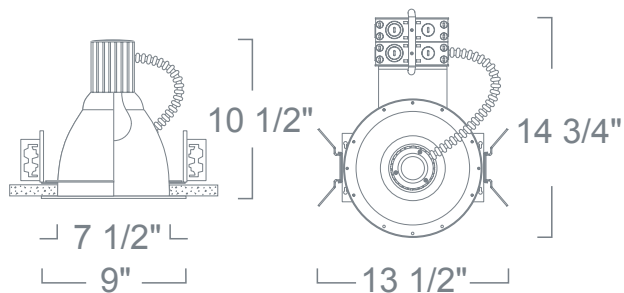

Pre-wired oversized junction box with knockouts and ground wire. MADE IN USA.
Architectural Hanger Bars sold separately.

SPECIFICATION

120V 250W Max PAR38/ A19/ A21
MED E26

Application: Architectural-grade recessed downlight housing for low to medium height ceilings and commercial installations. A variety of trims, compatible styles and finishes are available to achieve the proper décor and illumination.

Housing Frame: 16 gauge galvanized plaster ring with powder coat finish, six friction clips secure trim to housing for ceilings up to 1 1/2" thick. Triple slot bat-wing hanger brackets accommodate multiple bar hanger systems.

Mounting: Housing suitable for new construction installations only, Bat-Wing bar hanger brackets adjust vertically 3 1/4" for multiple ceiling types and accepts 1/2" EMT. 26" C-Channel Strut for T-bar ceilings and 27" adjustable linear hanger bars for plaster ceilings or wood/metal joists. Heavy duty 16-gauge, die-formed galvanized steel. Bar hangers optional.

Socket Cap: Extruded aluminum socket cap, 1 1/4" vertically adjustable socket arm with set screw which enables the use of multiple lamp types and repositioning to optimize lamp performance. Furnished with heat sink fins to vent lamp heat and extend lamp life. Accepts compatible reflector trims.

Socket: Standard porcelain medium screw base socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel double Junction Box, 64 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (10) 3/4", (2) 1" and (8) Romex knockouts. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard die-cast aluminum fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: UL/CUL listed for through-branch wiring (16) No.12 AWG 90°C and suitable for damp locations. NYC approved: Calendar #41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Label: UL Listed, cETL Listed

Assembled in USA



COMPATIBILITY

 LR878 CROSS BLADE REFLECTOR	 LR8071 REFLECTOR W/ GLASS RING	 LR876 REFLECTOR W/ GLASS ACCENT
 LR874 BAFFLE W/ LENS	 C260-J ADJUSTABLE C-CHANNEL HANGER BAR SET	 LR873 BAFFLED REFLECTOR
 LR872 REFLECTOR W/ LENS	 C260 C-CHANNEL HANGER BAR SET	 LR871 REFLECTOR
 CRTR8L 8" COMMERCIAL LED RETROFIT AMBER	 LR875 BAFFLE W/ GLASS ACCENT	 CRTR8L 8" COMMERCIAL LED RETROFIT

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LH800/C260

LH800	WATTAGE	OPTIONS	HANGER OPTIONS
LH800	Blank :250W	Blank :None -FS :Fuse	Blank :No Hanger /C260:(2)26" C- Channel Hanger Bars

ID#: 561