


LHLD39C20 - 3" LED NEW CONSTRUCTION HOUSING 700LM/1000LM (10W/13W) 3" LED HOUSINGS

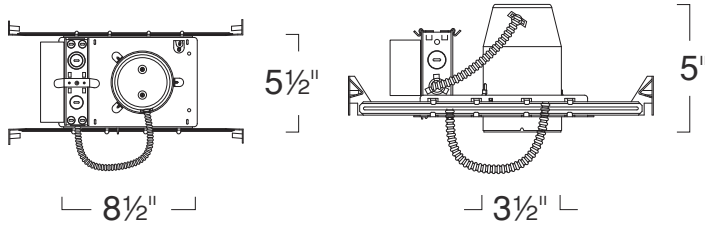

SPECIFICATION

10W/13W LED

Application: This miniature General Purpose LED housing is perfect for low to medium height ceilings in residential and light commercial applications. Its small aperture makes it ideal for strategic placement where space is limited and energy savings is important. A variety of trim styles, finishes, and beam spreads are available to achieve a desired look.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured via positive retention friction clips.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Driver: Electronic Direct Current U.L. Listed driver mounted away from LED Array for cool operation and end-of-life modularity. Comes standard with 120VAC input, available with optional 120V/277V universal voltage input.

Dimming: Standard dimming option smoothly dims down as low as 10% of initial light output with flicker-free operation works with standard Incandescent dimmers. Factory qualified for use with LUTRON Brand Dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton® IP106-600W. Also dims with Electronic Low Voltage dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, DVELV-300P, NELV-450 along with 3-Way versions. "UE-DUN" Universal Dimming Option dims with above mentioned dimming controls along with standard 0-10V dimming signals. "0-10V" (120-277V) Dimming Option works with most 5-wire, 0-10V dimmers. Factory qualified for use with Leviton IP710-DLZ.

Emergency Options: Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

Junction Box : 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Energy Efficient LED housing comes standard with IC rating for direct contact with loosefill blown and rolled insulation. (Due to higher temperatures in insulation environments, L70 Life Expectancy will be reduced by 35% for Non-Lensed Fixtures, and 50% for Lensed Fixtures when used with thermal insulation.)

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937. CCEA Certified: Conforms to CCEA-200 with Section 18-27-300.22 and special requirements Section 14-20-210C-4.

COMPATIBILITY

 LRLD1321 3" MICRO-CAST REFLECTOR (700LM)	 LRLD1342 3" DECO GLASS DOME (500LM)	 LRLD1388 3" MICRO-CAST GIMBAL (700LM)
 LRSQD1319 3" SQUARE PINHOLE BAFFLE (600LM)	 LRLD1319 3" MICRO-CAST PINHOLE (500LM)	 LRLD1356 3" DECO GLASS GIMBAL (700LM)
 LRLD1393 3" MICRO-CAST BAFFLE (700LM)		

Note: Wattage limitations on compatible items must be met.

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Caution: LITON recommends use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.

Benefit:

- Designed for spaces that benefit from small apertures
- Standard ELV/Incandescent dimming
- Available 120V/277V input option



ORDERING EXAMPLE : LHLD39C20

LHLD39C20	DIMMING	HOUSING OPTIONS	OPTIONS
LHLD39C20	Blank :120V ELV/Triac Dimming	Blank :None	Blank :None
	UE-DUN :120V-277V 0-10V/ELV/Triac Dimming	-CHP :Chicago Plenum	-EM :Emergency Backup*
	UE-D10 :120V/277V 0-10V Dimming		

* Above ceiling access required for EM option.



Tel: 323.904.0200

Product specifications subject to change without notice.

www.liton.com

