


LHLD4R9C20 - 4" LED REMODEL HOUSING (700LM/1000LM)

4" LED HOUSING

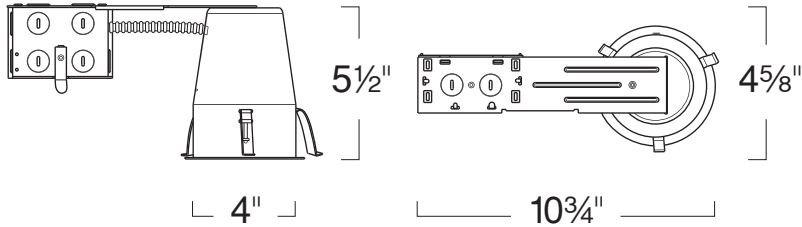

SPECIFICATION

10W/13W LED

Application: This energy efficient General Purpose recessed LED housing is perfect for low to medium height ceilings in residential and light commercial applications. A variety of trim styles, finishes and beam spreads are available to achieve a desired look.

Housing: Pre-wired housing adjusts up to a 1 1/4" ceiling thickness. Integral thermal protector to guard against improper lamping and installation. Trim is secured via positive retention friction clips.

Mounting: Housing suitable for existing or new construction installations, supplied with high tension remodeling clips, designed to secure the housing to an existing sheetrock ceiling for fast and easy installation.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Driver: Electronic Direct Current U.L. Listed driver mounted away from LED Array for cool operation and end-of-life modularity. Comes standard with 120VAC input and available with optional 120V/277V universal voltage input.

Dimming: Standard dimming option smoothly dims down as low as 10% of initial light output with flicker-free operation works with standard Incandescent dimmers. Factory qualified for use with LUTRON Brand Dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton® IP106-600W. Also dims with Electronic Low Voltage dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, DVELV-300P, NELV-450 along with 3-Way versions. "UE-DUN" Universal Dimming Option dims with above mentioned dimming controls along with standard 0-10V dimming signals. "0-10V" (120-277V) Dimming Option works with most 5-wire, 0-10V dimmers. Factory qualified for use with Leviton IP710-DLZ.

Emergency Options: Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (6) 3/4" and (4) Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Energy Efficient LED housing comes standard with IC rating for direct contact with loosefill blown and rolled insulation. (Due to higher temperatures in insulation environments, L70 Life Expectancy will be reduced by 35% for Non-Lensed Fixtures, and 50% for Lensed Fixtures when used with thermal insulation.)

Airflow: Airtight option is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute). Complies to Title24 air flow requirements (Air-tight).

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

COMPATIBILITY

 LRLD1420 4" ADJUSTABLE SLOT (550LM)	 LRLD1419 4" PINHOLE W/ PHENOLIC BAFFLE (500LM)	 LRLD1422 4" FROSTED GLASS (480LM)
 LRSQD1419 4" SQUARE ADJUSTABLE (700LM/1000LM)	 LRLD1431 4" REFLECTOR (700LM/1000LM)	 LRLD1493 4" LED METAL BAFFLE (700LM/1000LM)
 LRLD1401 4" LENSED LED (625LM/1000LM)	 LRLD1471 4" ADJUSTABLE REFLECTOR (700LM)	 LRLD1467 4" LED PULL DOWN (700LM)

Note: Wattage limitations on compatible items must be met.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Caution: LITON recommends use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty.

LED Details:

10W 700 + Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3,000K
Lamp Equivalents: 50W MR16

13W 1000 + Lumens Delivered
Color Rendering Index (CRI): 90
Color Temperature: 3,000K
Lamp Equivalents: 75W MR16

Benefit:

- 277V input and emergency battery back-up options
- Features Quick Connector for easy trim connection
- Driver mounted on external J-Box for cooler LED operation

FEATURE:



LHLD4R9C20	DIMMING	OPTIONS
LHLD4R9C20	Blank :20V ELV/Triac Dimming	Blank :None
	UE-DUN:120V-277V 0-10V/ELV/Triac Dimming	-EM :Emergency Backup*
	UE-D10 :120V/277V 0-10V Dimming	

* Above ceiling access required for EM option.



Tel: 323.904.0200

Product specifications subject to change without notice.

www.liton.com

