


LHX4IN - LINE VOLTAGE HOUSING

LINE VOLTAGE PHANTOM

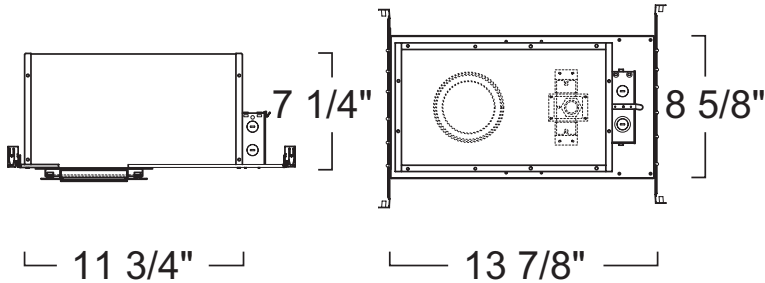

SPECIFICATION

Application: Architectural-grade recessed "Trimless" downlight for low to medium height ceilings for residential commercial installations. Trimless design provides a clean unobstructed "zero-sight" line ceiling. Die-Cast aluminum plaster frame disc installed on housing for easy installation. A variety of trims compatible styles and finishes are available to achieve the proper décor and illumination.

Housing: Pre-wired housing with Die-Cast adjustment plate with pre-set ceiling thickness for easy installation in 1/2", 5/8", 3/4" and 1 inch ceilings. Integral thermal protector to guard against improper lamping and installation. Housing provides an adjustable socket plate which allows for use of different lamp types. Trim is secured with QuickLok mounting mechanism for an easy scratch free installation.

Mounting: Housing suitable for new construction installations only, supplied with (2) 24" adjustable hanger bars with 90 degrees repositioning ability. Hanger bars equipped with nail-less install 3/4" serrated barbed studs and with captive nails, for faster and easier secure mounting in wood joists. Set-screws lock into position and prevent shifting after installation. Earthquake structural cable compatible for drop panel ceiling or any other mounting that requires direct support from structural ceilings.

Socket: Standard porcelain GU10 "Twist & Lock" socket with high temperature leads.

Junction Box: 16 gauge pre-wired galvanized steel Junction Box, 32 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with 3/4", 1" and Romex knock-outs. Strain clamps to install or remove covers for easy access and ground wire. Equipped with safety standard fitting for flex-conduit.

Insulation Contact: Non-IC rated housing must be kept 3" from insulation.

Safety Labels: ETL/CETL listed. Suitable for damp locations. NYC approved: Calendar #41937.

Light Source: Available in 120V 50W GU10 MR16 and 120V 50W GU10MR16 (277V).

Label: cETL Listed

Assembled in USA

COMPATIBILITY

 LRX422 FROSTED LENS	 LRX473 ADJUSTABLE ACCENT	 LRX475 FIXED WALL WASH
 LRX419 PINHOLE	 C260 C-CHANNEL HANGER BAR SET	 LRX420 SLOT
 L270 LINEAR HANGER BAR SET	 LRX421 REFLECTOR CONE	

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LHX4IN50

LHX4IN	LIGHT SOURCE
LHX4IN	50 :120V 50W GU10 MR16
	50-27 :120V 50W GU10MR16 (277V)

ID#: 2163