


LR1222 - REGRESSED FROSTED LENS 2" LOW VOLTAGE DOWNLIGHT DIE-CAST TRIMS

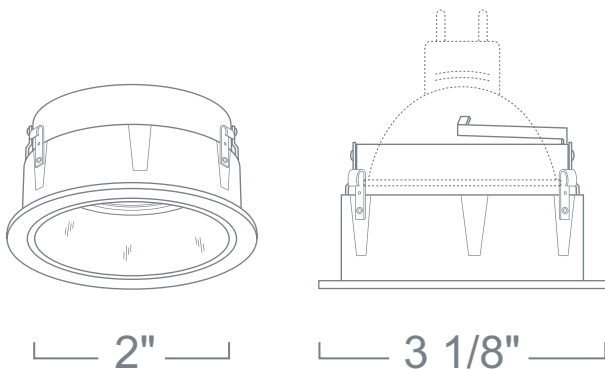

SPECIFICATION

12V 50W Max MR16 GU5.3

Application: Perfect solution for low-profile design in hard-to-light spaces. The frosted lens provides smooth downlight illumination in bathrooms and showers.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Finish: Available in All White, All Black, Clear Reflector w/White Ring, All Natural Metal, All Copper, All Mocha and Satin Reflector/Natural Ring.

Accessories: Takes up to (2) Media.

Label: cETL Listed

COMPATIBILITY

 LH2R REMODEL	 LH1299IC NEW CONSTRUCTION (IC)	 LH1299R REMODEL
 LHR1299 REMOTE HOUSING - NO TRANSFORMER	 LH1299 NEW CONSTRUCTION (NON-IC)	 LH2 NEW CONSTRUCTION

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR1222B-WL

LR1222	FINISH	RATING
LR1222	W :All White	Blank :Damp Location
	B :All Black	-WL :Wet Location
	C :Clear Reflector w/White Ring	
	N :All Natural Metal	
	CO :All Copper	
	MO :All Mocha	
	SN :Satin Reflector/Natural Ring	

ID#: 1574