



LR1311 - LOUVER 3" LOW VOLTAGE TRIMS

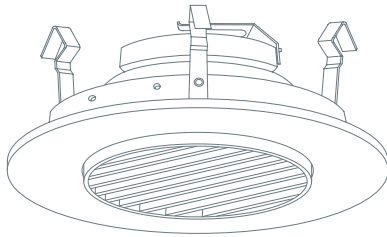

2 1/2"

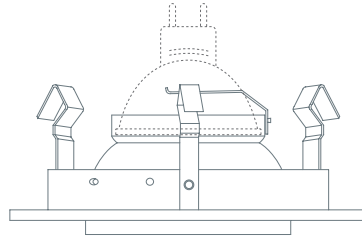

4 3/8"



SPECIFICATION

12V 50W Max MR16 GU5.3

Application: Used for both general and accent lighting with excellent results. Allows for the precision lighting of miniature lamps in small areas such as niches and casework. This produces an environment with powerful illumination, yet without drawing attention to its source.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Ring Finish: Die-Formed Construction Available in White and Black.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LSH1399 SHALLOW HOUSING	 LSH1399IC SHALLOW IC HOUSING	 LH1399R REMODEL HOUSING
 LH1399 STANDARD HOUSING	 LH1399IC IC DOUBLE WALL HOUSING	 LSH1399RE SHALLOW REMODEL HOUSING

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LR1311B

LR1311	RING FINISH	RATING	ACCESSORIES
LR1311	W :White	Blank :Damp Location	/L38 :Clear Lens
	B :Black		/L40 :Yellow Lens
			/L41 :Blue Lens
			/L42 :Amber Lens
			/L43 :Green Lens
			/L44 :Daylight Blue Lens
			/L48 :Lens with Internal Louver Filter
			/L49 :Frosted Soft Focus
			/L50UV :UltraViolet Filter
			/L53 :Micro - Prismatic Spread Lens
			/L55 :Linear Spread Lens
			/LL16B :Black
			/LL16C :Clear

ID#: 257