


## LR1388 - ADJUSTABLE GIMBAL 3" LOW VOLTAGE TRIMS

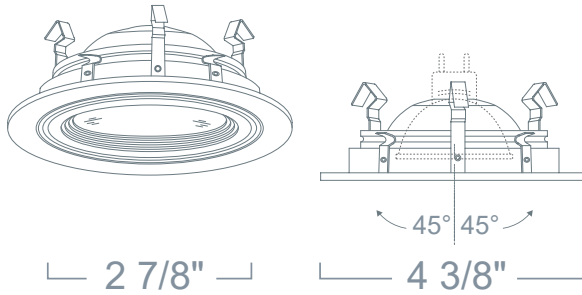

Off center pivot point allows for maximum lumen output when fully tilted.

### SPECIFICATION

12V 50W Max MR16 GU5.3

**Application:** Provides flexibility and versatility by doubling as both a downlight and as an accent light. This trim has a larger degree of rotation resulting in both visual style and practical ergonomics.

**Gasket:** Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

**Lens Inclusion:** Clear glass protective safety lens included in packaging.

**Mounting:** Steel pressure springs mounted on trim to ensure positive retention inside housing.

**Finish:** Die-Formed Construction Available in White, Black, Chrome, Gold, Natural and Copper.

### COMPATIBILITY

|                                                                                                                                    |                                                                                                                          |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| <br><b>LSH1399RE</b><br>SHALLOW REMODEL HOUSING | <br><b>LH1399R</b><br>REMODEL HOUSING | <br><b>LH1399IC</b><br>IC DOUBLE WALL HOUSING |
| <br><b>LSH1399IC</b><br>SHALLOW IC HOUSING      | <br><b>LH1399</b><br>STANDARD HOUSING | <br><b>LSH1399</b><br>SHALLOW HOUSING         |

Note: Wattage limitations on compatible items must be met.

### FEATURE:



ORDERING EXAMPLE : LR1388C

| LR1388        | FINISH            | ACCESSORIES                                   |
|---------------|-------------------|-----------------------------------------------|
| <b>LR1388</b> | <b>C</b> :Chrome  | <b>/L38</b> :Clear Lens                       |
|               | <b>G</b> :Gold    | <b>/L40</b> :Yellow Lens                      |
|               | <b>N</b> :Natural | <b>/L41</b> :Blue Lens                        |
|               | <b>CO</b> :Copper | <b>/L42</b> :Amber Lens                       |
|               |                   | <b>/L43</b> :Green Lens                       |
|               |                   | <b>/L44</b> :Daylight Blue Lens               |
|               |                   | <b>/L48</b> :Lens with Internal Louver Filter |
|               |                   | <b>/L49</b> :Frosted Soft Focus               |
|               |                   | <b>/L50UV</b> :UltraViolet Filter             |
|               |                   | <b>/L53</b> :Micro - Prismatic Spread Lens    |
|               |                   | <b>/L55</b> :Linear Spread Lens               |
|               |                   | <b>/LL16B</b> :Black                          |
|               |                   | <b>/LL16C</b> :Clear                          |

ID# : 278