
TYPE CATALOG#

LR1444 - NARROW APERTURE REFLECTOR

4" LOW VOLTAGE TRIMS



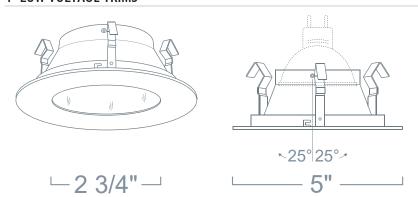

SPECIFICATION

12V 75W Max MR16 GU5.3

Application: Used in both general and accent lighting applications. Utilizing the crisp, light output and the precision aiming capabilities of the MR16 lamps, this trim brings out the most vibrant colors from artwork and accentuates the beauty of jewelry, crystals as well as architectural features.

Provides an even illumination with excellent lumen cutoff to create a dramatic lighting scene. The highly reflective surface allows for maximum lumen output.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Reflector Finish: Spun Aluminum Reflector Available in White, Black, Gold, All Copper* and Satin Haze.

Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Natural and

COMPATIBILITY

<u>LH1499</u>	<u>LH1499IC</u>	<u>LH1499R</u>
STANDARD HOUSING	IC DOUBLE WALL Housing	REMODEL HOUSING 120V/277V
<u>LSH1499</u>	<u>LSH1499IC</u>	<u>LSH1499R</u>
SHALLOW HOUSING	SHALLOW IC HOUSING	SHALLOW REMODEL Housing

Note: Wattage limitations on compatible items must be met.

FEATURE:















ORDERING EXAMPLE: LR1444W

LR1444	REFLECTOR FINISH RING FINISH			FINISH	ACCESSORIES		
LR1444	W	:White	Blank	:White		:Clear Lens	
		:Black	В	:Black	/L40	:Yellow Lens	
	CO	:All Copper* :Satin Haze	N CO	:Natural		:Blue Lens	
	S	:Satin Haze	CO	:Copper	/L42	:Amber Lens	
					/L43	:Green Lens	
					/L44	:Daylight Blue Lens :Lens with Internal Louver Filter	
					/L48	:Lens with Internal Louver Filter	
					/L49	:Frosted Soft Focus	
					/L50UV	:UltraViolet Filter	
					/L53	:Micro - Prismatic Spread Lens	
					/L55	:Linear Spread Lens	
					/LL16B	:Black	
					/LL16C	:Clear	

* Comes standard with a matching ring finish. Use "W" for White Ring.

eema

ID#: 214