


LREBLD5603 - 6" LED BAFFLE (1200LM)

6" LED

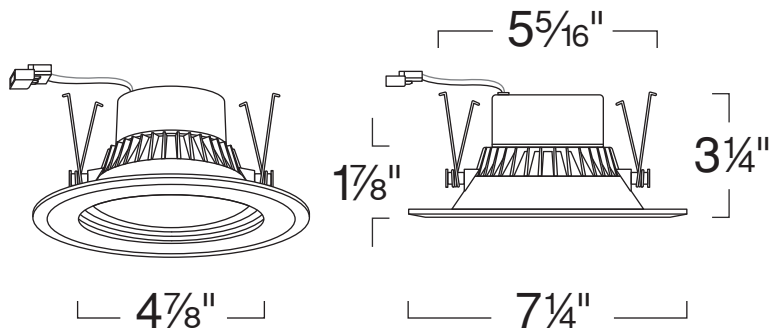

SPECIFICATION

LED 16W

Application: 6" General Purpose LED Trim with Orange Push-In Quick Connector Base is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings.

Mounting: Mounts into standard 5 & 6" General Purpose Recessed housing with steel pressure springs mounted on trim to ensure positive retention inside housing. Alternate mounting methods available, consult factory.

Power Connection: Comes standard with socket mounted to top of fixture. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture.

Dimming: Smoothly dims down to 5% of initial light output with flicker-free performance. Works with standard incandescent dimmers. Factory qualified for use with Lutron brand dimmers: S600PR, DVSCCL-153P & DV600PR as well as Leviton IP106-600W. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

Safety Labels: ETL/CETL listed. UL listed for wet locations. NYC approved: Calendar#41937. High Efficacy Luminaire Certified by the California Energy Commission (CEC) as Title 24 / JA8 Compliant.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Adapter: Available in and Med Base.



COMPATIBILITY

 LH7ICA-QC NEW CONSTRUCTION (2-PIN)	 LH7RICA-QC REMODEL HOUSING (2-PIN)	 LH27 STANDARD SHALLOW E26 HOUSING
 LSHFR7-QC 6" IC 2HR FIRE-RATED LED HOUSING (SHALLOW)		

Note: Wattage limitations on compatible items must be met.

LED Details:

16W 1200 Lumen Package
 Color Rendering Index (CRI)²: 90
 Color Temperature: 3,000K
 Lamp Equivalent: 75W R30

Benefit:

- 16 watt trim fits standard 6" housings
- Fully die-cast for long lasting durability
- Trims are UL listed for wet locations
- Quick Ship Item - Readily Available
- 90 CRI Standard

FEATURE:



ORDERING EXAMPLE : LREBLD5603W-T27

LREBLD5603	FINISH	VOLTAGE	COLOR TEMP	ADAPTER
LREBLD5603	B :Black Baffle/Black Ring* W :White Baffle/ White Ring	Blank :120V	-T27 :2700K -T30 :3000K -T35 :3500K -T40 :4000K -TS354 :ColorSelect 3000K/3500K/4000K	Blank :None /SQG4-MED :Med Base

* Special order extended lead time.