


LREQLD402 - SQUARE REFLECTOR (DIMMABLE) 4" LED

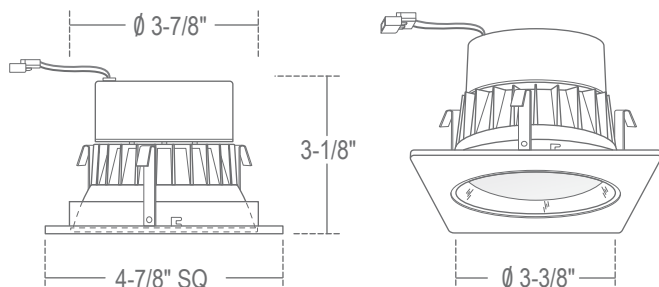

SPECIFICATION

LED 11W/16W

Application: 4" General Purpose Square LED Trim with Orange Push-In Quick Connector Base is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings.

Mounting: Mounts into standard 4" General Purpose Recessed housing cans with steel pressure springs mounted on trim to ensure positive retention inside housing. Alternate mounting methods available, consult factory.

Power Connection: Comes standard with socket mounted to top of fixture. Meets CA Title 24 Requirements and other standards restricting the use of Medium base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Driver: Electronic Direct Current driver mounted on fixture. Comes standard with Incandescent dimming. Smoothly dims down to 5% with standard Incandescent and Low Voltage dimmers.

Safety Labels: ETL/CETL listed. UL listed for wet location. NYC approved: Calendar#41937.

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Finish: Only available in White Reflector/White Ring.

Color Temp: Available in 2700K, 3000K, 3500K and 4000K. Binned according to ANSI C78 377A for color temperature and chromaticity ranges. Consult factory as extended lead times and minimum order quantities apply.

COMPATIBILITY



LH99ICA-QC

4" NEW CONSTRUCTION
(2-PIN ORANGE CONNECTOR)



LH99RICA-QC

4" REMODELING HOUSING
(2-PIN ORANGE CONNECTOR)



LSH99ICA-QC

NEW CONSTRUCTION
SHALLOW HOUSING



LSHF99-QC

4" IC 2HR FIRE-RATED
LED HOUSING (SHALLOW)

Note: Wattage limitations on compatible items must be met.

LED Details:

11W 650 Lumen Package
Color Rendering Index (CRI)²: 85
Color Temperature: 3000K
Lamp Equivalent: 65W BR30/50 A19

16W 900 Lumen Package
Color Rendering Index (CRI)²: 85
Color Temperature: 3000K
Lamp Equivalent: 75W R40

Benefit:

- Fully die-cast for long lasting beauty
- Trims are UL listed for wet locations
- Quick Ship Item - Readily Available
- ELV/Incandescent Dimming Standard
- Energy Star Qualified
- 11W, 650 Lumens
- 5 year limited warranty

Title 24/JA8 Compliant

- LREQLD402 -T27
- LREQLD402 -T30
- LREQLD402 -T40

FEATURE:



ORDERING EXAMPLE : LREQLD402W-T27

LREQLD402	FINISH	VOLTAGE	COLOR TEMP	LUMENS	RATING	ADAPTER
LREQLD402	W :White Reflector/White Ring	Blank :120V UE :120V/277V	-T27 :2700K -T30 :3000K -T35 :3500K -T40 :4000K	Blank :650 Lumen (11W) -L10 :900 Lumen (16W)	Blank :None -WL :Wet Location	Blank :None /SQG4-MED :Med Base