


LRLD671 - 6" LED WALL WASH/SLOPED 6" LED TRIMS (6 LED SERIES)

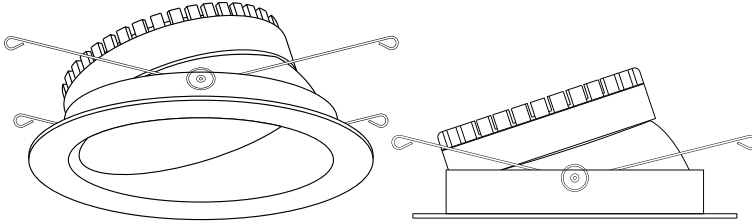

5 3/4"

7 3/8"

SPECIFICATION

10W/15W LED

Application: This energy efficient wall wash LED trim is perfect for low to medium height ceilings in residential and light commercial applications. Wall wash trims provide excellent accent lighting without drawing attention to the light source. A variety of finishes and beam spreads are available to enhance any interior environment.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 2,700K, 3,500K & 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Reflector Finish: Available in All White, All Black, Satin Reflector/ White Ring, All Satin Haze and Clear Reflector/ Natural Ring.

Beam Spread: Available in Flood, Narrow Flood, Wide Flood and Wide Flood (SOL Lens).

Color Temp: Only available in 3000K.

Label: cETL Listed

Limitation: Not for use w/Shallow Housings.

Assembled in USA

COMPATIBILITY



LRLD6

6" LED HOUSING
(10W/15W)



LRLD6R

6" IC REMODEL LED
HOUSING (10W/15W)

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 450 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W MR16, PAR20, PAR30, 75W A19

15W 650 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 75W MR16, PAR30, PAR38, 100W A19

Benefit:

- 10W delivers 450Lm, 15W delivers 650Lm
- Tightly controlled beam spreads for maximum optical control
- Powerful performance for wall wash or sloped ceiling applications
- Features Quick Connector for easy connection to housing
- Complies with CA Title 24 and other energy codes

2016-14

FEATURE:



ORDERING EXAMPLE : LRLD671SS-B61

LRLD671	REFLECTOR FINISH	BEAM SPREAD	COLOR TEMP
LRLD671	W :All White	-B25 :Narrow Flood	Blank :3000K
	BB :All Black	-B45 :Flood	
	S :Satin Reflector/ White Ring	-B60 :Wide Flood (SOL Lens)	
	SS :All Satin Haze	-B61 :Wide Flood	
	CNF :Clear Reflector/ Natural Ring		

ID#: 2300