


LRLD693 - 6" DEEP LED BAFFLE 6" LED TRIMS (6 LED SERIES)

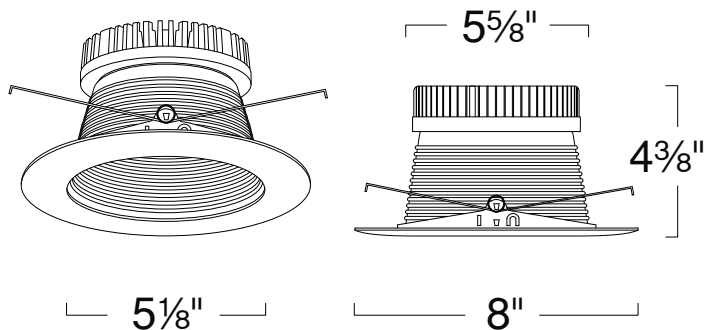

SPECIFICATION

10W/15W LED

Application: This energy efficient LED trim is perfect for medium to high height ceilings in residential and light commercial applications. A variety of finishes, and beam spreads are available to achieve a desired look and lumen output.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 2,700K, 3,500K & 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Certification: This LED product is certified as compliant with California's Title 24 Energy Code by the California Energy Commission.

Baffle Finish: Available in White and Black.

Ring Finish: Only available in White.

Beam Spread: Available in Flood, Narrow Flood, Wide Flood and Wide Flood (Singular Opaque Lens).

Color Temp: Only available in 3000K.

Label: cETL Listed

Limitation: Not for use w/Shallow Housings.

Assembled in USA



COMPATIBILITY



LHL6

6" LED HOUSING
(10W/15W)



LHL6R

6" IC REMODEL LED
HOUSING (10W/15W)

Note: Wattage limitations on compatible items must be met.

LED Details:

10W 450 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W MR16, PAR20, PAR30, 75W A19

15W 650 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 75W MR16, PAR30, PAR38, 100W A19

Benefit:

- 10W delivers 450Lm, 15W delivers 650Lm
- Deep Reflector/Baffle eliminates glare
- One piece self-flanged design allows easy installation
- Features Quick Connector for easy connection to housing

FEATURE:



ORDERING EXAMPLE : LRLD693W-B45

LRLD693	BAFFLE FINISH	RING FINISH	BEAM SPREAD	COLOR TEMP
LRLD693	W :White	Blank :White	-B25 :Narrow Flood	Blank :3000K
	B :Black		-B45 :Flood	
			-B60 :Wide Flood (Singular Opaque Lens)	
			-B61 :Wide Flood	

ID#: 2128