


LRLDH446 - 4" DECO GLASS-SHIELD (DOME) 4" 14W LED LIGHTING (9 LED SERIES)

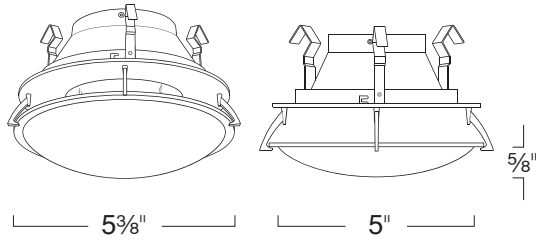

Not Compatible w/ Shallow Housings

SPECIFICATION

9x1.6W LED

Application: Combines the elements of a clear reflector and the soft, warm glow of light to illuminates walls and ceilings. The **Decorative Glass** LED trims add elegance to your design and make an architectural statement in any environment.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: Minimum 35,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Color Temperature: Comes standard with 3,000K Warm White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges. Available with other color temperatures with ANSI binning of 4,000K. To order use "-T" Suffix followed by color temperature. Example 4000K= T40. Consult factory as extended lead times and minimum order quantities apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Certification: This LED product is certified as compliant with California's Title 24 Energy Code by the California Energy Commission.

Reflector Finish: Spun Aluminum Reflector Available in All Black, All White and Satin Haze Reflector/White Ring.

Glass: Quality tempered glass adds a decorative element. Only available in Frosted.

Beam Spread: Only available in 60° Wide Flood.

Label: cETL Listed

Assembled in USA



COMPATIBILITY



LHFRLD4

4" IC FIRE-RATED LED HOUSING (14W)



LHLDH4

4" IC LED HOUSING (14W)



LHLDH4R

4" IC REMODEL LED HOUSING (14W)



LHFR99-QC

4" IC FIRE-RATED LED HOUSING (2-PIN ORANGE CONNECTOR)

Note: Wattage limitations on compatible items must be met.

LED Details:

14W 650 + Lumens Delivered

Color Rendering Index (CRI): 80

Color Temperature: 3,000K

Lamp Equivalents: 50W MR16, PAR20, PAR30, 75W A19

Benefit:

- 14W LED delivers up to 650 Lumens
- Outperforms 50W MR16, PAR20, PAR30 or 75W A19 Lamps
- Complies with CA Title 24 and other energy codes
- Quick Connector for easy installation

FEATURE:



ORDERING EXAMPLE : LRLDH446BB-FR

LRLDH446	REFLECTOR FINISH	GLASS	BEAM SPREAD
LRLDH446	BB :All Black	-FR :Frosted	Blank :60° Wide Flood
	S :Satin Haze Reflector/White Ring		
	W :All White		