


LRLDH642 - 6" 750/1200LM DECO FROST LED DOME 6" LED

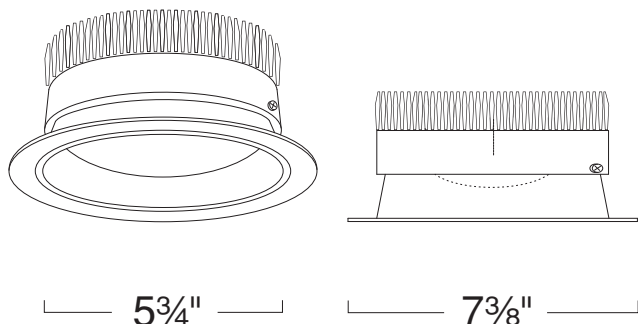

SPECIFICATION

9W/16W LED

Application: This energy efficient, General Purpose LED trim is perfect for medium to high height ceilings in residential and light commercial applications. Approved for damp or wet locations, this trim is ideal for showers, bathrooms and other spaces where moisture is an issue. Its glass dome lens softens glare helping to create a more welcoming environment.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Power Connection: LED heat sinked lamp module is replaceable via onboard quick exclusionary disconnect terminal. No tools required. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Lumen Maintenance: 9W: Minimum 75,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results. 16W: Minimum 40,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

Lumen Output: Wattage of housing determines lumen output of trim. 9W/750Lm 16W/1200Lm

Color Temperature: Comes standard with 3500K Cool White LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Label: cETL Listed

Assembled in USA

COMPATIBILITY

 LSHLDH6 6" SHALLOW LED HOUSING (9W/16W)	 LSHLDH6R 6" REMODEL SHALLOW HOUSING (9W/16W)	 LHFRLD6 6" IC FIRE-RATED LED HOUSING (9W/16W)
 LHLDH6 6" IC LED HOUSING (9W/16W)	 LKL16V120 16W DIMMABLE RETROFIT KIT	 LHLDH6R 6" IC REMODEL LED HOUSING (9W/16W)

Note: Wattage limitations on compatible items must be met.

LED Details:

9W 750 + Lumens Delivered

Color Rendering Index (CRI): 90

Color Temperature: 3500K

Lamp Equivalents: 50W MR16, PAR20, PAR30, 75W A19

16W 1200 + Lumens Delivered

Color Rendering Index (CRI): 90

Color Temperature: 3500K

Lamp Equivalents: 75W MR16, PAR30, PAR38, 100W A19

Benefit:

- Frosted Glass Dome provides soft, ambient light
- Available for Wet Locations
- Fits Shallow Housings
- Outperforms 50W MR16, PAR20, PAR30 or 75W A19 Lamps
- Standard 3500K

FEATURE:



ORDERING EXAMPLE : LRLDH642C-WL

LRLDH642	FINISH	RATING
LRLDH642	C :Clear Reflector/White Ring	Blank :Damp Location
	W :White Reflector/White Ring	-WL :Wet Location