


LRQ1423 - SQUARE RING DOME 4" LOW VOLTAGE TRIMS

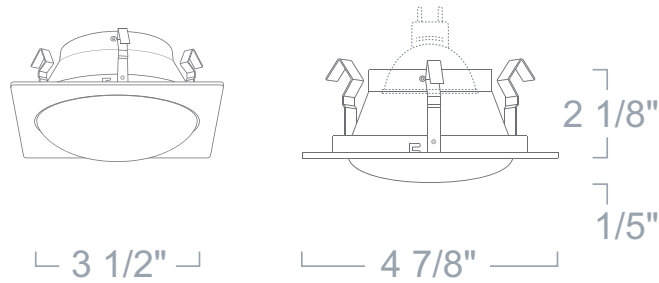

Not for use with Remodel Housings.

SPECIFICATION

12V 75W Max MR16 GU5.3

Application: Simple, functional and decorative luminaire perfect for today's ever changing interiors, modern and traditional alike. Can be easily installed into an existing 4" round aperture housing, allowing for an adjustable and perfect trim alignment.

Gasket: Supplied with gasket to prevent light leakage and unsightly heat streaks on ceiling surface.

Lens Inclusion: Clear glass protective safety lens included in packaging.

Mounting: Steel pressure springs mounted on trim to ensure positive retention inside housing.

Reflector Finish: Spun Aluminum Reflector Only available in Clear.

Square Ring Finish: Die-Formed Aluminum Trim Ring Available in White, Black, Chrome, Natural, Copper and Mocha.

Accessories: Takes (1) 2" Media.

Label: UL Listed, cETL Listed

COMPATIBILITY

 LH1499 STANDARD HOUSING	 LH1499IC IC DOUBLE WALL HOUSING	 LH1499R REMODEL HOUSING 120V/277V
 LSH1499 SHALLOW HOUSING	 LSH1499IC SHALLOW IC HOUSING	

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LRQ1423MO

LRQ1423	REFLECTOR FINISH	SQUARE RING FINISH	RATING	ACCESSORIES
LRQ1423	Blank :Clear	W :White B :Black C :Chrome N :Natural CO :Copper MO :Mocha	Blank :Damp Location -WL :Wet Location	/L38 :Clear Lens /L40 :Yellow Lens /L41 :Blue Lens /L42 :Amber Lens /L43 :Green Lens /L44 :Daylight Blue Lens /L48 :Lens with Internal Louver Filter /L49 :Frosted Soft Focus /L50UV :UltraViolet Filter /L53 :Micro - Prismatic Spread Lens /L55 :Linear Spread Lens /LL16B :Black /LL16C :Clear

ID#: 238