


# LSLDH73 : HORIZONTAL RECTANGLE LOUVER

## LED PATHWAY/STEP LIGHTING



- Die Cast Construction
- Sleek screw-less face plate
- Direct wiring, long leads.
- No remote driver required
- Dimmable with ELV Dimmers

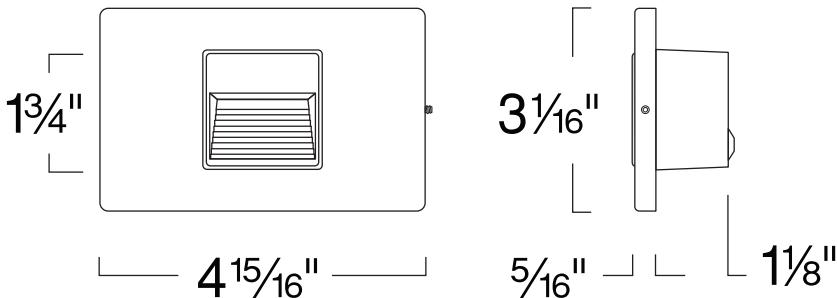

### ORDERING : LSLEDH73BB-TAM-12VDC

**LSLEDH73**  
 Fixture      Finish      Options

| Finish    |           | Options                 |                   |
|-----------|-----------|-------------------------|-------------------|
| All Black | <b>BB</b> | 2850K (120V)            | <b>Blank</b>      |
| All White | <b>WW</b> | 590nm Amber LED (12VDC) | <b>-TAM-12VDC</b> |

**SPECIFICATION****Application**

Low level illumination of pathways, aisles and lower egress in residential and commercial applications. Louver design shields the lamp source to eliminate glare.

**Mounting**

Step Light mounts to a standard depth (1-1/2") single-gang junction box. No specialized or proprietary housing required. Faceplate is secured with a set-screw on lower edge.

**Dimming**

Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450.

**Lumen Maintenance**

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Thermal Management**

Effective thermal dissipation facilitated by integral cast-aluminum, finned heat sink design for maximum heat rejection to provide long LED life.

**Color Temperature**

Comes standard with 2850K Warm White LED's binned according to ANSI C78.377A for color temperature and chromaticity ranges.

**Warranty**

Covered by a 3-year warranty to be free of defects in materials or craftsmanship.

**Listing**

ETL / cETL Listed. IP65 Rated.

**Finish**

Seamless and screw-less die-cast aluminum faceplate. Available in All Black and All White.

**LED Details**

3.5W 240 + Lumens Delivered  
Color Rendering Index (CRI): 80  
Color Temperature: 2850K  
Lamp Equivalents: 10W Incandescent