


LT128 - CONE LOW VOLTAGE DROP TRACK

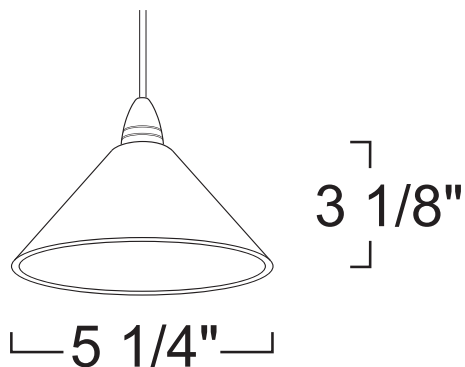

SPECIFICATION

12V 50W MR16 GU5.3

Application: Pendant fixtures are ideal for general and task lighting over bars, counters, and tables, where a downward light is needed. These unique miniature shades blend perfectly into contemporary surroundings to provide that high-tech sophisticated look.

These pendants come hardwired for connection to standard 1-circuit or 2-circuit track. For other mounting options see our InterJack section.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Shade Glass: Fixture in Standard Available in Blue, Frosted, Green and Yellow. Cord in standard white, black or metal.

Wire Length: Available in 12", 24", 36", 48", 60" and 72".

Cable Color: Available in White Cable and Connector, Black Cable and Connector and Metallic Cable and Black Connector.

Label: UL Listed

COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT128-FR-12W

LT128	SHADE GLASS	WIRE LENGTH	CABLE COLOR
LT128	-BL :Blue	-12 :12"	W :White Cable and Connector
	-FR :Frosted	-24 :24"	B :Black Cable and Connector
	-GR :Green	-36 :36"	MC :Metalic Cable and Black Connector
	-YL :Yellow	-48 :48"	
		-60 :60"	
		-72 :72"	

ID#: 819