


LT713 - ADJUSTABLE PENDANT LOW VOLTAGE EXTENDED TRACK

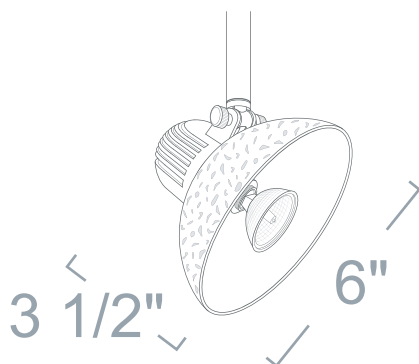

SPECIFICATION

12V 50W MR16 GU5.3

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Aiming Mechanism: Die-cast aluminum arm that completely conceals wiring. Internal mechanism and dual plastic tightening knobs rigidly maintain aiming angle. Optional extensions.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Recommended for Damp and Wet locations

Extension: High heat rated baked enamel Available in 18", 24", 12", 48" and 36". Custom finishes available with extended lead times – consult factory.

Fixture Finish: Available in White and Black.

Glass: Available in Blue, Frosted and Yellow.

Label: UL Listed

COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT713-12W-BL-75

LT713	EXTENSION	OPTION	FIXTURE FINISH	GLASS	WATTAGE
LT713	-12 :12"	Blank :None	W :White	-BL :Blue	Blank :50W
	-18 :18"	-X :Adjustable Extension	B :Black	-FR :Frosted	-75 :75W
	-24 :24"			-YL :Yellow	
	-36 :36"				
	-48 :48"				

ID#: 812