


LT725 - MINI GIMBAL W/ SNOOT LOW VOLTAGE TRACK

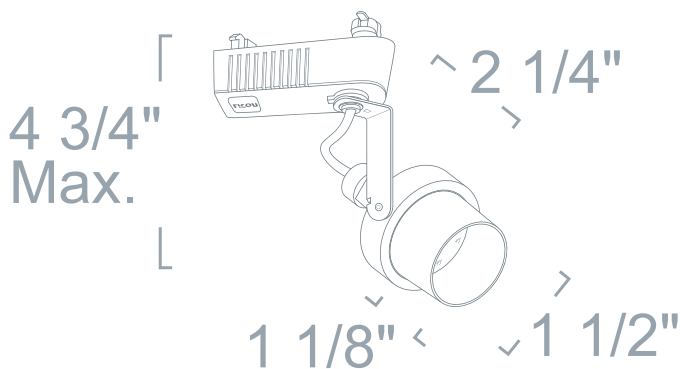

SPECIFICATION

12V 50W MR16 GU5.3

Application: The most popular style of all is the gimbal design. With their low profiles, these fixtures have minimal dimensions, and best of all they won't cramp your budget. They are a perfect fit for highlighting artwork in a residence, items in a gallery or retail items in a store.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Aiming Mechanism: High strength steel side-mount bracket. Knurled plastic tightening knob rigidly maintains aiming angle.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Finish: High heat rated baked enamel Available in White, Black, Natural Metal and Copper Metal. Black finish snoot. Custom finishes available with extended lead times – consult factory.

COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT725W

LT725	FINISH	WATTAGE
LT725	W :White	Blank :50W
	B :Black	-75 :75W
	N :Natural Metal	
	CO :Copper Metal	

ID# : 759