


LT780 - DIE-CAST SQUARE BEAM PROJECTOR LOW VOLTAGE TRACK



Specialty MR16 lamp included along with adjusting tool.

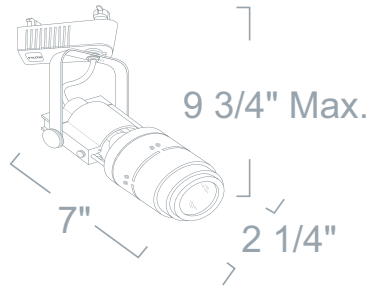

SPECIFICATION

12V 50W MR16 GU5.3

Application: For a high performance special effect, these projectors can be used to translate almost any desired shape onto a horizontal or vertical surface, even a custom logo. Both modern looking and functional, the built-in optics provide excellent cut-off and light control as well as an aesthetic feel to the environment. Their compact, sleek designs are a perfect fit for the typical bulky projectors commonly found in the industry. Made of high quality die-cast construction, these fixtures will illuminate your design for years to come.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Finish: High heat rated baked enamel Available in Black and Satin Gray. Custom finishes available with extended lead times – consult factory.

Label: UL Listed

COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT780B

LT780	FINISH	ACCESSORIES
LT780	B :Black	/MR16-120 :120V/50W (Flood)
	S :Satin Gray	/MR16-50 :12V/50W (Flood)
		/MR16B :Black Back (Flood)
		/MR16N :Gray Back (Flood)

ID#: 783