


LT781 - DIE-CAST CASTBACK DOME LOW VOLTAGE TRACK

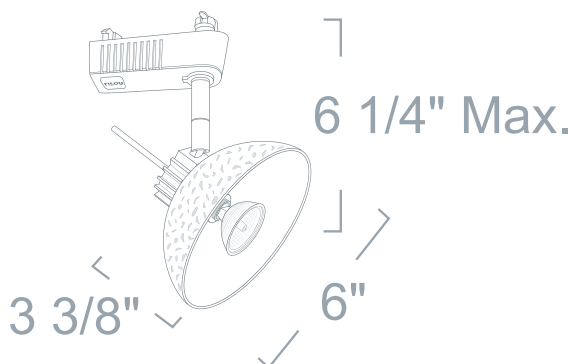

SPECIFICATION

12V 50W MR16/T4 GX5.3/GY6.35

Application: Add a touch of "Glass" elegance to your design and make an architectural statement. These attractive glass track heads create a signature look to any environment. Available in popular frosted glass colors and shapes.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Transformer: Solid state electronic transformer for voltage reduction and noiseless operation. 120V/60Hz input – 12V output. 50 VA max. load. (Unless specified otherwise) For dimming, use electronic low voltage rated dimming controls. When using dimmer controls, it is recommended to fully power lamps without dimming for 50+ hours to maximize halogen lamp life.

Aiming Mechanism: Die-cast aluminum arm that completely conceals wiring. Internal mechanism and dual plastic tightening knobs rigidly maintain aiming angle. Optional extensions.

Socket: 2-pin porcelain socket with aluminum heat sink plate. Lamp clips to trim to ensure proper and consistent positioning.

Finish: High heat rated baked enamel Available in White, Black and Satin Haze. Custom finishes available with extended lead times – consult factory.

Glass: Available in Blue / Green Confetti, Brown / Beige Confetti, Clear Crackle and Orange / Yellow Confetti.

COMPATIBILITY



LP

1 CCT TRACK CHANNEL



LPC

2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LT781W-CF1

LT781	FINISH	GLASS
LT781	W :White	-CF1 :Orange / Yellow Confetti
	B :Black	-CF2 :Brown / Beige Confetti
	S :Satin Haze	-CF3 :Blue / Green Confetti
		-CR :Clear Crackle

ID#: 784