


LTD5125 - 25W LINEAR LED WALL WASH (1500 LUMEN) LED TRACK HEAD

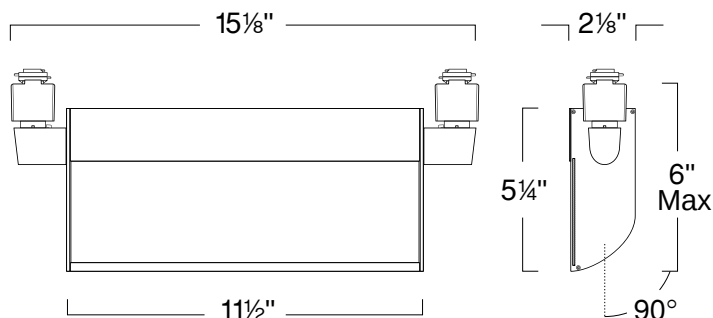

SPECIFICATION

120V 25W LED

Application: High-output EcoTrack LED trackhead features a sleek, rectangular, low-profile design that combines soft yet powerful illumination with maximum energy efficiency. Perfect for applications in retail stores, boutiques and other areas where adjustable illumination is required and ceilings may be high or distances may be long. Functions both as a flood and as an even, scallop-free wall wash to illuminate signage, displays and merchandise. Provides up to 5 times the lumen output of traditional halogen lamp sources.

Aiming: Precision machined aiming mechanism allows 90° vertical adjustment.

Connector: Comes standard with 3-Wire H-Type thermoplastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory. Also available for specification-grade 120V and 277V 4-Wire Track Systems. Consult factory.

Driver: Electronic Direct Current U.L. recognized driver mounted away from LED Array for cool operation and end-of-life modularity. Comes standard with 120VAC input. Available with optional 120V/277V universal voltage input. Consult factory for lead times and minimum orders.

Dimming: Low Voltage dimming option (-DLV) works with standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, VELV-300P, NELV-450 along with 3-Way versions. (-DLV) Dimming Option also compatible with Grafik Eye Dimming Interface ELVI-1000, smoothly dims down as low as 10% of initial light output with flicker-free operation.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Color Temperature: LED Diodes comes standard in warm white 3,000K +/- 100K. Also available in 4,000K as special order. Consult factory, extended lead times and minimum order quantities may apply.

Warranty: Covered by a 3 Year Warranty to be free of defects in materials and craftsmanship.

Finish: Powder Coated Aluminum Extrusions. Available in Black and White.

Label: cETL Listed

COMPATIBILITY

 PT57 PLUG-IN CLAMP ADAPTER	 LP20 RECESSED TRACK	 LP 1 CCT TRACK CHANNEL
 LP913 LINE VOLTAGE ROUND CANOPY	 LPC 2 CCT TRACK CHANNEL	 LP971 LINE VOLTAGE SQUARE CANOPY
 PT58 LINE VOLTAGE CLAMP ADAPTER		

Note: Wattage limitations on compatible items must be met.

LED Details:

1500 + Lumens

Color Rendering Index (CRI): 80

Color Temperature: 2,900K

Lamp Equivalents: 2x24W T5HO, 1x39W T5HO, 1x40W 2G11 BIAx

Benefit:

- High-Output LED Delivers 1500+ Lumens
- Produces Even, Scallop-free Wall Wash
- For use with standard H-Style 1 circuit and 2 circuit track
- Incandescent Dimming option
- Precision design insures firm positioning

FEATURE:



ORDERING EXAMPLE : LTD5125B-DLV

LTD5125	FINISH	DIMMING
LTD5125	B :Black Blank :None W :White	-DLV :ELV Dimming

ID#: 2581