


LTD7410 : APOLLO 10 LED TRACK HEAD 1100LM (16W)

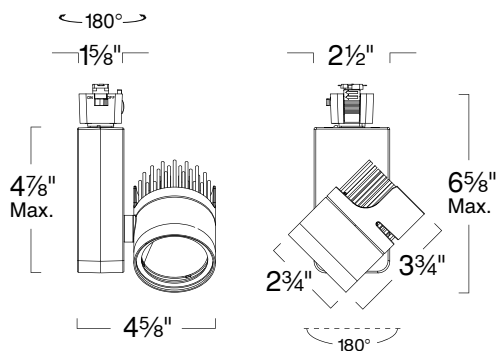

SPECIFICATION

Application: High Output architecturally-styled APOLLO LED Trackhead is perfect for applications where powerful lumen output is required. Fully die-cast with integrated heatsink, hardware and wiring for a sleek unobtrusive appearance. APOLLO combines long-lasting beauty and energy efficiency with intense lumen output. Excels at delivering maximum footcandles to objects, spaces and features from longer distances. Ideal for Retail and Commercial applications.

Connector: LITON track fixtures come standard with 3-Wire H-Type track connections. Fixture is factory preset for installation on single-circuit track. J-Type and L-Type connections are available with extended lead times - consult factory.

Driver: Electronic Constant Current driver integrally mounted in fixture casing.

Dimming: Low Voltage dimming option (-DLV) works with standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, VELV-300P, NELV-450 along with 3-Way versions. (-DLV) Dimming Option also compatible with Grafik Eye Dimming Interface ELVI-1000, smoothly dims down as low as 10% of initial light output with flicker-free operation.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Finish: Available in All Black and Bright White/Black Heat Sink.

Beam Spread: Available in Flood, Narrow Flood and Spot.

Color Temp: Available in 2700K, 3000K, 3500K and 4000K. LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

Label: cETL Listed

LED Details:

16W 1100 + Lumens Delivered
Color Rendering Index (CRI): 80
Lamp Equivalents: 70W MR16 , 75W PAR20

Benefits:

- Fully die-cast for high quality, long-lasting beauty.
- 3 beam spread options for fine tuning footcandle distribution.
- Powerful 1100 lumen output lights objects and spaces near and far.
- MR16 75W performance in a long life, cool running LED track head

FEATURE:



ORDERING EXAMPLE : LTD7410B-B15-DLV-T27

LTD7410	FINISH	BEAM SPREAD	DIMMING	COLOR TEMP	CRI	OPTION
LTD7410	B :All Black	-B15 :Spot	-DLV :ELV Dimming	-T27 :2700K	Blank :80 CRI	Blank :None
	W :Bright White/Black Heat Sink	-B25 :Narrow Flood	BLANK :Non -	-T30 :3000K	-C90 :90 CRI*	-LVR :MR16 Hex Louver*
		-B45 :Flood	Dimming	-T35 :3500K		
				-T40 :4000K		

* Special Order

Available with 277V input & Multi-Circuit track.