


LTD7430 : APOLLO 30 LED TRACK HEAD 2900LM (32W)

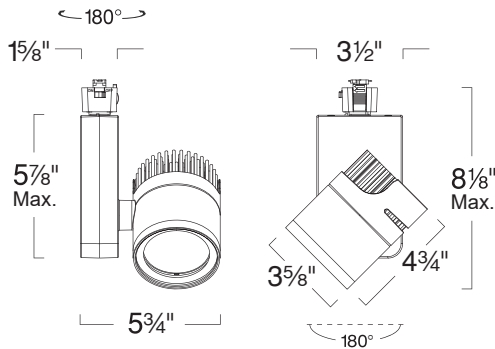

SPECIFICATION

120V 32W LED

Application: High Output architecturally-styled APOLLO LED Trackhead is perfect for applications where powerful lumen output is required. Fully die-cast with integrated heatsink, hardware and wiring for a sleek unobtrusive appearance. APOLLO combines long-lasting beauty and energy efficiency with intense lumen output. Excels at delivering maximum footcandles to objects, spaces and features from longer distances. Ideal for Retail and Commercial applications.

Connector: LITON track fixtures come standard with 3-Wire H-Type track connections. Fixture is factory preset for installation on single-circuit track. J-Type and L-Type connections are available with extended lead times - consult factory

Warm Dimming: With this new technology, you can create the warm glow of traditional incandescent dimming while offering extraordinary energy efficiency and service life of LED Lighting. Allow for fixture start at a full 3050K when at full-brightness and smoothly dim down to 5% level with the warm glow of 1850K using dimming option the frame-in kit.

Driver: Electronic Constant Current driver integrally mounted in fixture casing

Dimming: Low Voltage dimming option (-DLV) works with standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, VELV-300P, NELV-450 along with 3-Way versions. (-DLV) Dimming Option also compatible with Grafik Eye Dimming Interface ELVI-1000, smoothly dims down as low as 10% of initial light output with flicker-free operation.

Lumen Maintenance: Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results

Thermal Management: Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

Warranty: Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty

Finish: Available in All Black and Bright White/Black Heat Sink.

Beam Spread: Multifaceted glare reducing anodized reflector held in place with die-cast aluminum holder. Available in Narrow Flood, Flood and Spot. Optical reflectors can be ordered separately. Use part #: RL-AP30-FL, RL-AP30-NF, RL-AP30-SP

Color Temp: Available in 3000K, 2700K, 3500K, 4000K and 1850K-2700K Warm Dim. LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

Label: cETL Listed

COMPATIBILITY

 LP913 LINE VOLTAGE ROUND CANOPY	 LP971 LINE VOLTAGE SQUARE CANOPY	 PT57 PLUG-IN CLAMP ADAPTER
 PT58 LINE VOLTAGE CLAMP ADAPTER	 LP 1 CCT TRACK CHANNEL	 LPC 2 CCT TRACK CHANNEL

Note: Wattage limitations on compatible items must be met.

LED Details:

32W 2900 + Lumens Delivered

Color Rendering Index (CRI): 80

Lamp Equivalents: CMH-PAR20 39W, CMH-T4.5 39W

Benefit:

- Fully die-cast for high quality, long-lasting beauty
- 3 beam spread options for fine tuning footcandle distribution
- Powerful 2900 lumen output lights objects and spaces near and far
- T4 & T6 performance in a long life, cool running LED track head
- Available with Tool-less field changeable optics

FEATURE:



ORDERING EXAMPLE : LTD7430B-B15-DLV-T30

LTD7430	FINISH	BEAM SPREAD	DIMMING	COLOR TEMP	CRI	OPTIONS
LTD7430 B	:All Black	-B10 :Narrow	Blank :120V	-T27 :2700K	Blank :80 CRI	Blank :None
W	:Bright White/Black Heat Sink	Spot	Non-Dimming	-T30 :3000K	-C90 :90 CRI*	-LVR :MR16 Hex
		-B15 :Spot	UE-DUN :120V/277V	-T35 :3500K		Louver*
		-B25 :Narrow	ELV/2-Wire/0-10V Dimming	-T40 :4000K		
		-B45 :Flood		TWD :1850K-2700K Warm Dimming		

Available with 277V input & Multi-Circuit Track. Consult Factory.

*Special Order



Product specifications subject to change without notice.
Tel: 323.904.0200 www.liton.com

