


## LTD7460 : APOLLO 60 LED TRACK HEAD

6000lm (60W)

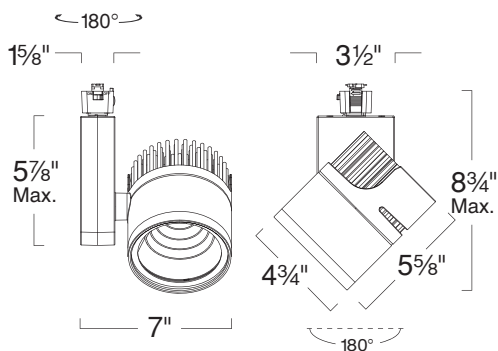

### SPECIFICATION

60W LED

**Application:** High Output architecturally-styled APOLLO LED Trackhead is perfect for applications where powerful lumen output is required. Fully die-cast with integrated heatsink, hardware and wiring for a sleek unobtrusive appearance. APOLLO combines long-lasting beauty and energy efficiency with intense lumen output. Excels at delivering maximum footcandles to objects, spaces and features from longer distances. Ideal for Retail and Commercial applications.

**Connector:** LITON track fixtures come standard with 3-Wire H-Type track connections. Fixture is factory preset for installation on single-circuit track. J-Type and L-Type connections are available with extended lead times - consult factory.

**Driver:** Electronic Constant Current driver integrally mounted in fixture casing.

**Dimming:** Low Voltage dimming option (-DLV) works with standard Electronic Low Voltage Dimmers. Factory qualified for use with LUTRON Brand Dimmers: SELV-300P, VELV-300P, NELV-450 along with 3-Way versions. (-DLV) Dimming Option also compatible with Grafik Eye Dimming Interface ELVI-1000, smoothly dims down as low as 10% of initial light output with flicker-free operation.

**Lumen Maintenance:** Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

**Thermal Management:** Effective thermal dissipation facilitated by integral cast-aluminum, heat sink design for maximum heat rejection to provide long LED life.

**Warranty:** Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

**Finish:** Available in All Black and Bright White/Black Heat Sink.

**Beam Spread:** Multifaceted glare reducing anodized reflector held in place with die-cast aluminum holder. Available in Flood, Narrow Flood and Spot. Optical reflectors can be ordered separately. Use part #: RL-AP50-FL, RL-AP50-NF, RL-AP50-SP..

**Color Temp:** Available in 2700K, 3000K, 3500K and 4000K. LEDs binned to within 3-Step MacAdam Ellipses (SDCM) and surpasses the ANSI C78 377A standard for color deviation.

**Label:** cETL Listed

### COMPATIBILITY

|                                               |                                                |                                          |
|-----------------------------------------------|------------------------------------------------|------------------------------------------|
| <br><b>LP913</b><br>LINE VOLTAGE ROUND CANOPY | <br><b>LP971</b><br>LINE VOLTAGE SQUARE CANOPY | <br><b>PT57</b><br>PLUG-IN CLAMP ADAPTER |
| <br><b>PT58</b><br>LINE VOLTAGE CLAMP ADAPTER | <br><b>LP</b><br>1 CCT TRACK CHANNEL           | <br><b>LPC</b><br>2 CCT TRACK CHANNEL    |

**Note:** Wattage limitations on compatible items must be met.

#### LED Details:

60W 6000 + Lumens Delivered

Color Rendering Index (CRI): 80

Lamp Equivalents: 70W CMH-T4.5, 100W PAR38 CMH, PAR30 CMH

#### Benefits:

- Fully die-cast for high quality, long-lasting beauty
- 3 beam spread options for fine tuning footcandle distribution
- Powerful 6000 lumen output lights objects and spaces near and far
- T4 & T6 performance in a long life, cool running LED track head
- Available with Tool-less field changeable optics

### FEATURE:



ORDERING EXAMPLE : LTD7460B-B15-T30

| LTD7460 | FINISH                                 | BEAM SPREAD               | DIMMING                   | COLOR TEMP         | CRI                  | OPTION                        |
|---------|----------------------------------------|---------------------------|---------------------------|--------------------|----------------------|-------------------------------|
| LTD7460 | <b>B</b> :All Black                    | <b>-B15</b> :Spot         | <b>Blank</b> :Non-Dimming | <b>-T27</b> :2700K | <b>Blank</b> :80 CRI | <b>Blank</b> :None            |
|         | <b>W</b> :Bright White/Black Heat Sink | <b>-B25</b> :Narrow Flood | <b>-DLV</b> :ELV Dimming  | <b>-T30</b> :3000K | <b>-C90</b> :90 CRI  | <b>-LVR</b> :MR16 Hex Louver* |
|         |                                        | <b>-B45</b> :Flood        |                           | <b>-T35</b> :3500K |                      |                               |
|         |                                        |                           |                           | <b>-T40</b> :4000K |                      |                               |

\* Special Order

Available with 0-10V and DMX Dimming consult factory for details.



Product specifications subject to change without notice.  
Tel: 323.904.0200 www.liton.com

