


LTF5224 / LTF5254 ENERGY EFFICIENT TRACK FIXTURES

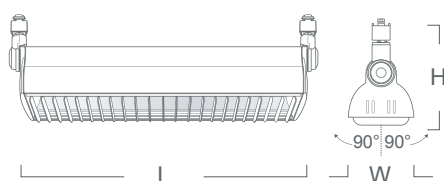

	L	W	H
LTF5224	23 1/2"	3 3/4"	6 5/8"
LTF5239	35 1/2"	3 3/4"	6 5/8"
LTF5254	47 1/2"	3 3/4"	6 5/8"

LTF5224B has been discontinued.

SPECIFICATION

CFL T5/HO G5

Application: For retail and commercial environments where energy efficiency is a must. With four to five times the lumen output of traditional halogen lamp sources, these fluorescent track heads are a perfect fit. Used for wall washing and flood lighting, these fixtures are ideal for uniform illumination of retail signage, displays and general merchandising.

Energy efficient compact fluorescent fixtures are made of durable cast and extruded aluminum housings and high quality specular formed aluminum reflectors, making them a choice for lighting professionals. The hidden high performance electronic ballast, integral in these units, ensures long life and maintenance-free operation.

The integral electronic ballasts and high efficiency specular aluminum reflectors combine to maximize lumen output with a 70% energy savings compared to traditional incandescent source.

Connector: Comes standard with 3-Wire H-Type thermo-plastic track connections. Fixture is factory preset for installation on single-circuit track. Contacts may be easily adjusted to install on two-circuit track via pull-up tab. J-Type and L-Type connections are available with extended lead times - consult factory.

Socket: Thermo-plastic 600V rated G5 socket. Mini bi-pin sockets rotate 90 degree to engage contacts and firm fit.

Fixture Finish: Available in White and Black*.

Label: UL Listed



COMPATIBILITY

 LP913 LINE VOLTAGE ROUND CANOPY	 LP971 LINE VOLTAGE SQUARE CANOPY	 LP 1 CCT TRACK CHANNEL
 LPC 2 CCT TRACK CHANNEL		

Note: Wattage limitations on compatible items must be met.

FEATURE:



ORDERING EXAMPLE : LTF5224W

LTF5	WATTAGE	FIXTURE FINISH
LTF5	224 :(2) 24W T5HO	W :White
	239 :(2) 39W T5HO	B :Black*
	254 :(2) 54W T5HO	

* Not available for LTF5224.

ID#: 941