


AG2340 : AG2-SERIES

4" ROUND SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 1500LM (10W-15W)

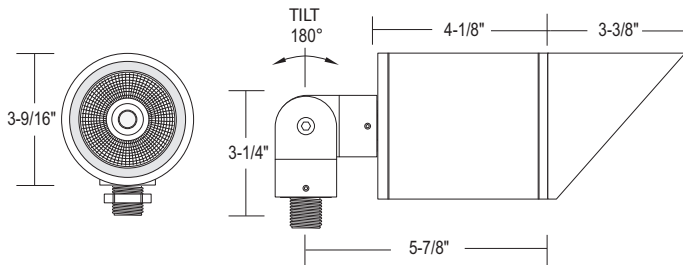

AG2340 Shown with
Glare Shield Option (-SH)



- Design consistency with WD/DL/BL2 Series
- Variety of mounting methods
- 120-277V/347V Input options
- Optional field adjustable Variable Beams, CCTs, and dimming options
- Wireless and wired RGBW options available (12W)
- Glare shield for eye comfort
- Weep holes for water drainage

ORDERING : AG2340W-L15-B10UE-D10-T27-JB-CRD/AG2-T-W



[Click for Full Specification Details](#)

AG2340

Fixture	Finish	Lumen	Beam Spread	Dimming	LED	Mounting	Cable and Glare Shield	Options	Accessories	Color Finish
Finish		Beam Spread		LED		Accessories				
White	AG2340W	Wide Flood	Blank	4000K (90 CRI)	Blank	GROUND Installation				
Black	AG2340B	8° Mini Spot	-B08^{1,9}	2700K (90 CRI)	-T27	None	Blank			
Bronze	AG2340BZ	Narrow Spot	-B10	2700K (97 CRI)	-T27-C97	Ground Spike	/AG2-SPK			
Silver	AG2340S¹	Spot	-B20	3000K (90 CRI)	-T30	Ground Spike, AC	/AG2-SPK-AC			
Light Silver	AG2340LS¹	Flood	-B45	3000K (97 CRI)	-T30-C97	WALL/CEILING/TREE Installation⁵				
Dark Grey	AG2340DG¹	Asymmetric (30° x 60°)	-B3060¹	3500K (90 CRI)	-T35	T-Connector	/AG2-T			
Metallic Gold	AG2340MG¹	Variable Beam (20° - 45°)	-BVR	5000K (80 CRI)	-T50	L-Connector	/AG2-L			
Metallic Black	AG2340MB¹			RGB+W Control (24VDC)	-RGBWV24^{1,2,8}	Stem Coupler	/AG2-CPL			
Lumen		Dimming		Mounting		6" Stem	/AG2-STM06			
1000lm (10W)	Blank	Non-Dimming (120V)	Blank	Direct	Blank	12" Stem	/AG2-STM12			
1500lm (15W)	-L15	UniDim™ (120V/277V)	UE-DUN	Flat Plate, Surface Mount	-PL	18" Stem	/AG2-STM18			
		0-10V (120V/277V)	UE-D10	Junction Box	-JB	24" Stem	/AG2-STM24			
		Triac Dimming (120V)	-DIN	Cable and Glare Shield^{3,4}		36" Stem	/AG2-STM36			
		0-10V 1% (120V/277V)	UE-D10P1	None	Blank	ROUND POLE MOUNT Installation				
				36" Jacketed-Cable	-CRD	Tenon Reducer Hub	/AG2-TRH-1/2			
				36" Cable and Shield	-CRD-SH	EMERGENCY OPTIONS Installation				
				Shield	-SH	None	Blank			
				Options		Face Mount EM	/AG2-EMB			
				None	Blank	Back Pack				
				Hex-Cell Louver	-LVR	Empty Back Pack	/AG2-EMB BLANK⁷			
				Surge Protector	-SRG	Color Finish⁶				
				Frosted Lens	-FR	White	-W			
						Black	-B			
						Bronze	-BZ			

¹ Special Order. Minimum order, extended lead time may apply. Consult factory.

² Remote power supplies and control gear required. Available with wireless bluetooth or DMX control. Consult factory for details.

³ Cable (-CRD) not available with stem and mounting.

⁴ Custom cable lengths available. Consult Factory.

⁵ Custom stem lengths available. Consult Factory.

⁶ Color finishes of accessories do not apply for AG2-SPK or AG2-SPK-AC.

⁷ Blank EM enclosure available for non -EM units to provide a seamless design.

⁸ (-TAM) 590nm Amber (Turtle Safe) and (-RGBWV24) RGB+W control is only available with Wide Flood (Blank) Beam Spread.

⁹ (-B08) Mini Spot not available with LED option: (-T50) 5000K, 80 CRI.