



# AG2380 : AG2-SERIES

## 8" ROUND SPOT/FLOOD LIGHT

7500LM - 16,000LM (70W - 160W)

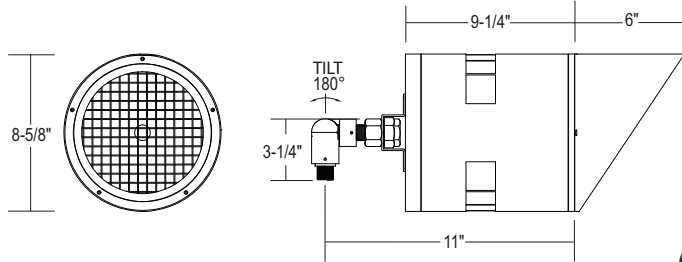

AG2380 Shown with  
Glare Shield Option (-SH)



- Expansive lumen range of 7,500lm (70W) to 16,000lm (160W)
- Multiple Dimming Options with custom capabilities
- Matching wall and ceiling mount profiles
- 120V/277V Input options
- Multiple Beam Spreads and Color Temperature
- Weighs 12 lb
- 90 CRI Standard

ORDERING : AG2380W-L075-B40UE-D10-T27-PL-SH / AG2-STM06-W

[Click for Full Specification Details](#)

### AG2380

| Fixture            | Finish         | Lumen | Beam Spread                                     | Dimming                     | LED                       | Mounting                | Glare Shield                          | Options | Accessories | Color Finish |
|--------------------|----------------|-------|-------------------------------------------------|-----------------------------|---------------------------|-------------------------|---------------------------------------|---------|-------------|--------------|
| <b>Finish</b>      |                |       | <b>Dimming</b>                                  |                             | <b>LED</b>                |                         | <b>Accessories</b>                    |         |             |              |
| White              | <b>AG2380W</b> |       | 0-10V Dimming                                   | <b>UE-D10</b>               | 2700K (90 CRI)            | <b>-T27</b>             | <b>CEILING AND WALL Installation</b>  |         |             |              |
| Black              | <b>AG2380B</b> |       | 120V/277V                                       |                             | 3000K (90 CRI)            | <b>-T30</b>             | 6" Stem <b>/AG2-STM06</b>             |         |             |              |
|                    |                |       | 1%, 0-10V Dimming                               | <b>UE-D10P1<sup>6</sup></b> | 3500K (90 CRI)            | <b>-T35</b>             | 12" Stem <b>/AG2-STM12</b>            |         |             |              |
| <b>Lumen</b>       |                |       | 120V/277V                                       |                             | 4000K (90 CRI)            | <b>-T40</b>             | <b>CEILING Installation</b>           |         |             |              |
| 7500lm (70W)       | <b>-L075</b>   |       | UniDim™                                         | <b>UE-DUN<sup>1</sup></b>   | 5000K (80 CRI)            | <b>-T50<sup>5</sup></b> | 24" Stem <b>/AG2-STM24</b>            |         |             |              |
| 9000lm (80W)       | <b>-L090</b>   |       | 120V/277V, 0-10V, ELV and Incandescent Controls |                             | -TTW: Tunable White       | <b>-TTW<sup>3</sup></b> | 36" Stem <b>/AG2-STM36</b>            |         |             |              |
| 10000lm (90W)      | <b>-L100</b>   |       |                                                 |                             | <b>Mounting</b>           |                         | 48" Stem <b>/AG2-STM48</b>            |         |             |              |
| 12000lm (110W)     | <b>-L120</b>   |       | 120V, ELV and Incandescent Dimming              | <b>-DIN<sup>1</sup></b>     | Flat Plate, Surface Mount | <b>-PL</b>              | <b>EMERGENCY OPTIONS Installation</b> |         |             |              |
| 16000lm (160W)     | <b>-L160</b>   |       | 1% DMX Dimming                                  | <b>UE-DMX<sup>4</sup></b>   | Junction Box              | <b>-JB</b>              | Face Mount EM <b>/AG2-EMB</b>         |         |             |              |
| <b>Beam Spread</b> |                |       | 120V/277V                                       |                             | <b>Glare Shield</b>       |                         | Back Pack                             |         |             |              |
| Flood (40°)        | <b>-B40</b>    |       |                                                 |                             | None                      | <b>Blank</b>            | Empty Back Pack <b>/AG2-EMB BLANK</b> |         |             |              |
| Wide Flood (60°)   | <b>-B60</b>    |       |                                                 |                             | Shield                    | <b>-SH</b>              | <b>Color Finish</b>                   |         |             |              |
|                    |                |       |                                                 |                             | <b>Options</b>            |                         | White <b>-W</b>                       |         |             |              |
|                    |                |       |                                                 |                             | None                      | <b>Blank</b>            | Black <b>-B</b>                       |         |             |              |
|                    |                |       |                                                 |                             | Frosted Lens              | <b>-FR</b>              | Bronze <b>-BZ</b>                     |         |             |              |

<sup>1</sup> (UE-DUN) and (-DIN) not available with (-L090) 9000lm (80W) or (-L160) 16000lm (160W).

<sup>2</sup> Stem mounts can be adjusted in the field. See instructions.

<sup>3</sup> (-TTW) Tunable White via two 0-10V dimming controls. 10-14 week lead time.

<sup>4</sup> UE-DMX dimming via 0-10V to DMX converter.

<sup>5</sup> 5000K Color Temperature only available in 80 CRI.

<sup>6</sup> (UE-D10P1) not available with (-L120) 12000lm (110W) or (-L160) 16000lm (160W).