


AGQ2340 : AG2-SERIES

4" SQUARE SPOT/FLOOD LIGHT

WALL/CEILING/GROUND/TREE 1000LM - 1500LM (10W-15W)

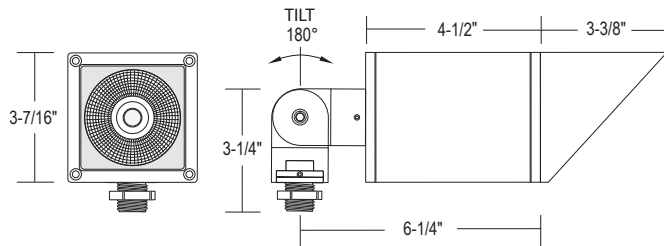

AGQ2340 Shown with
Glare Shield Option (-SH)



- Design consistency with WD/DL/BL2 Series
- Variety of mounting methods
- 120-277V/347V Input options
- Optional field adjustable Variable Beams, CCTs, and dimming options
- Wireless and wired RGBW options available (12W)
- Glare shield for eye comfort
- Weep holes for water drainage

ORDERING : AGQ2340W-L15-B10UE-D10-T27-JB-CRD/AG2-T-W



[Click for Full Specification Details](#)

AGQ2340

Fixture	Finish	Lumen	Beam Spread	Dimming	LED	Mounting	Cable and Glare Shield	Options	Accessories	Color Finish
Finish		Beam Spread			LED			Accessories		
White	AGQ2340W	Wide Flood	Blank	4000K (90 CRI)	Blank	GROUND Installation				
Black	AGQ2340B	8° Mini Spot	-B08 ^{1,9}	2700K (90 CRI)	-T27	None	Blank			
Bronze	AGQ2340BZ	Narrow Spot	-B10	2700K (97 CRI)	-T27-C97	Ground Spike	/AG2-SPK			
Silver	AGQ2340S ¹	Spot	-B20	3000K (90 CRI)	-T30	Ground Spike, AC	/AG2-SPK-AC			
Light Silver	AGQ2340LS ¹	Flood	-B45	3000K (97 CRI)	-T30-C97	WALL/CEILING/TREE Installation ⁵				
Dark Grey	AGQ2340DG ¹	Asymmetric (30° x 60°)	-B3060 ¹	3500K (90 CRI)	-T35	T-Connector	/AG2-T			
Metallic Gold	AGQ2340MG ¹	Variable Beam	-BVR	5000K (80 CRI)	-T50	L-Connector	/AG2-L			
Metallic Black	AGQ2340MB ¹	(20° - 45°)		RGB+W Control (24VDC)	-RGBWV24 ^{1,2,8}	Stem Coupler	/AG2-CPL			
				590nm Amber (Turtle Safe)	-TAM ⁸	6" Stem	/AG2-STM06			
						12" Stem	/AG2-STM12			
						18" Stem	/AG2-STM18			
						24" Stem	/AG2-STM24			
						36" Stem	/AG2-STM36			
						ROUND POLE MOUNT Installation				
						Tenon Reducer Hub	/AG2-TRH-1/2			
						EMERGENCY OPTIONS Installation				
						None	Blank			
						36" Jacketed-Cable	-CRD	None	Blank	
						36" Cable and Shield	-CRD-SH	Face Mount EM	/AG2-EMB	
						Shield	-SH	Back Pack		
						Options		Empty Back Pack	/AG2-EMB BLANK ⁷	
						None	Blank	Color Finish ⁶		
						Hex-Cell Louver	-LVR	White	-W	
						Surge Protector	-SRG	Black	-B	
						Frosted Lens	-FR	Bronze	-BZ	

¹ Special Order. Minimum order, extended lead time may apply. Consult factory.

² Remote power supplies and control gear required. Available with wireless bluetooth or DMX control. Consult factory for details.

³ Cable (-CRD) not available with stem and mounting.

⁴ Custom cable lengths available. Consult Factory.

⁵ Custom stem lengths available. Consult Factory.

⁶ Color finishes of accessories do not apply for AG2-SPK or AG2-SPK-AC.

⁷ Blank EM enclosure available for non-EM units to provide a seamless design.

⁸ (-TAM) 590nm Amber (Turtle Safe) and (-RGBWV24) RGB+W control is only available with Wide Flood (Blank) Beam Spread.

⁹ (-B08) Mini Spot not available with LED option: (-T50) 5000K, 80 CRI.

¹ Special Order. Minimum order, extended lead time may apply. Consult factory.
² Remote power supplies and control gear required. Available with wireless bluetooth or DMX control. Consult factory for details.
³ Cable (-CRD) not available with stem and mounting.
⁴ Custom cable lengths available. Consult Factory.
⁵ Custom stem lengths available. Consult Factory.
⁶ Color finishes of accessories do not apply for AG2-SPK or AG2-SPK-AC.
⁷ Blank EM enclosure available for non -EM units to provide a seamless design.
⁸ (-TAM) 590nm Amber (Turtle Safe) and (-RGBWV24) RGB+W control is only available with Wide Flood (Blank) Beam Spread.
⁹ -B08) Mini Spot not available with LED option: (-T50) 5000K, 80 CRI.