



CH6SHL : 6" C-SERIES


SUPER LOW GLARE - SHALLOW LED NEW CONSTRUCTION
1000LM-1800LM (10W-20W)

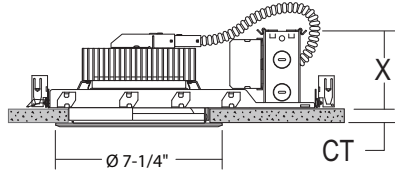

X = 3-7/16" (frame bottom to fixture top)

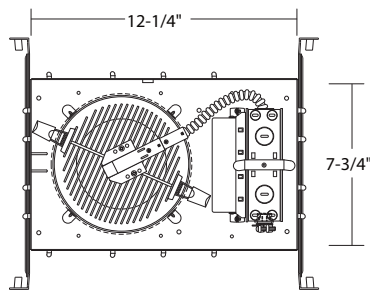

Ceiling Thickness (CT): 1-1/2" Max
Ceiling Cut-Out: 6-1/2"

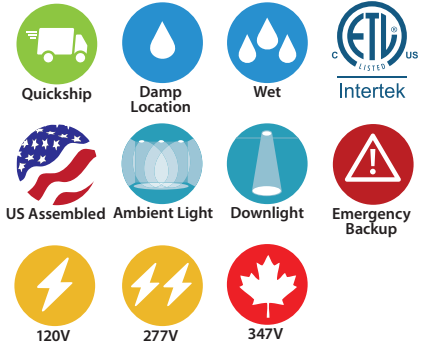

- Deeply recessed lens and 65.5° visual cutoff for reduced glare
- Shallow 3-5/8" depth for ceilings with minimal plenum air-space
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CH6SHL10UE-D10/CR6SHL24SW-T30



[Click for Full Specification Details](#)

CH6SHL		Insulation Contact		Driver Options	Emergency Options	J-Box	Reflector Finish	CCT	Options
Lumens		Insulation Contact				J-Box		CCT	
		Non-IC	Blank			Standard	Blank	3000K	-TS30
		ICA Rated/Airtight	ICA			Junction Box (Chicago Plenum)	-CHP	3500K	-TS35
Lumens								4000K	-TS40
1000lm (10W)	CH6SHL10							ColorSelect 3000K/3500K /4000K	-TS354
1300lm (14W)	CH6SHL12								
1800lm (20W)	CH6SHL17								
Driver Options ¹		Emergency Options		Reflector Finish		Options			
0-10V Dimming		None		Satin Haze Reflector /White Finish		None		Blank	
UniDim™ 0-10V ELV and Triac Dimming		Remote Location Emergency Battery		White Reflector /White Finish		Lens for wet locations w/ 60° Beam Spread		-LENS60	
120V ELV and Triac Dimming		Remote Location Emergency Inverter		All Black		Lens for wet locations w/ 110° Beam Spread		-LENS110	
Lutron Hi-lume		Generator Transfer Device		Clear Specular Reflector /White Ring					
Lutron EcoSystem									
347V, 0-10V Dimming									
0-10V Dimming (1%)									
Athena Wireless Node									
Athena Wireless Node Occupancy Sensor									

¹ All drivers are 120V/277V unless otherwise noted.

² Extended Lead Time. Consult Factory.

³ Check wiring diagram.