


# 10" ARCHITECTURAL CEILING DIFFUSED 600 LM-1,500 LM

## LED SURFACE MOUNT | ARCHITECTURAL CEILING DIFFUSED LIGHT

### Benefits

- Impact Resistant Diffusing Lens
- Cold Weather Operation (-40°F)
- Glare-Free Soft Diffused Illumination
- Tamper Proof Hardware
- 80+ CRI Light Quality
- ADA Compliant for Mounting within 4 feet of the ground
- IP65 RATED

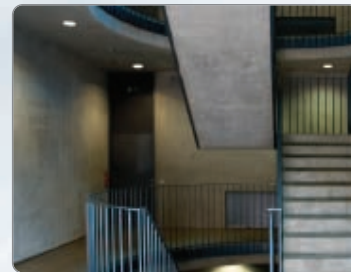

### Application

Ceiling Mount Surface Luminaires are ideal for indoor or outdoor applications in residential, commercial, or architectural installations that require the fixture to integrate into the design of the structure. The ceiling mount surface can be used to direct and guide as well as supply lighting for security.

### Housing

Constructed from one piece of high grade die cast aluminum with a powder coat finish. Includes an integral wiring compartment and silicone gasket. One (1) power entry hole (1/2-14 NPSM) provided.

### Faceplate

A round, cross bar, one-piece, high grade die cast aluminum with a high corrosion-resistant powder coat finish and semi-translucent UV stabilized polycarbonate opal lens. Faceplate is secured to housing by four (4) captive, tamper resistant, stainless steel screws.

### Through Wiring

A maximum of four (4) No. 12 AWG conductors (plus ground wire)

### Emergency Options

Emergency LED Battery Back-Up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch, plate cover and junction box included.

### Lumen Maintenance

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results. See ordering guide for delivered lumens.

### Electrical

AC 50/60Hz Electronic Direct Current Class 2 driver integrally mounted. Power Factor > 0.90. Accessible from above or below ceiling. Suitable for cold weather applications down to -40°C/-40°F

### Dimming

0-10V dimming option (-D10) works with most 5-Wire 0-10V dimmers. Factory qualified for use with Leviton IP710-DLX and Lutron NTFTV-WH.

### Listing

ETL/cETL Listed, suitable for wet locations and for all types of construction, covered ceiling mount. ADA compliant when installed per ADA Requirements.

### Warranty

Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship.




# 10" ARCHITECTURAL CEILING DIFFUSED 600 LM-1,500 LM

## LED SURFACE MOUNT | ARCHITECTURAL CEILING DIFFUSED LIGHT

### WS700C 10" ROUND OPEN FACE LED CEILING DIFFUSED LIGHT

(10W) 600LM - (20W) 1,500LM | CEILING SURFACE MOUNT

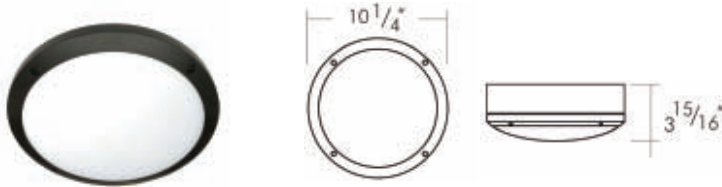

- Surface-mount Open Face Ceiling Sconce Luminaire
- Indoor or outdoor settings
- Residential, commercial, or architectural applications
- Used as direct, guide, and supply lighting for security

### WS730C 10" ROUND BULLS-EYE LED CEILING DIFFUSED LIGHT


(10W) 600LM - (20W) 1,500LM | CEILING SURFACE MOUNT



- Surface-mount Bulls-Eye Ceiling Sconce Luminaire
- Indoor or outdoor settings
- Residential, commercial, or architectural applications
- Used as direct, guide, and supply lighting for security

### WS734C 10" ROUND CROSS BAR LED CEILING DIFFUSED LIGHT

(10W) 600LM - (20W) 1,500LM | CEILING SURFACE MOUNT

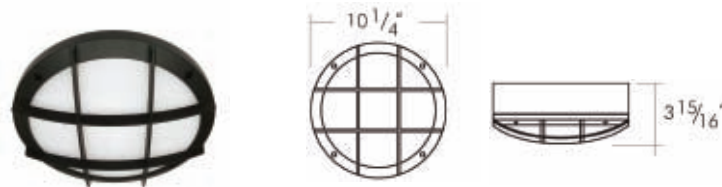

- Surface-mount Cross Bar Ceiling Sconce Luminaire
- Indoor or outdoor settings
- Residential, commercial, or architectural applications
- Used as direct, guide, and supply lighting for security

## LED 10-INCH (CEILING) SURFACE-MOUNT ORDERING

Example: **WS700CB-L15UE-D10-RGBW**

| ITEM #             | FINISH        | LUMEN              | OPTION                          | COLOR TEMPERATURE                        |
|--------------------|---------------|--------------------|---------------------------------|------------------------------------------|
| WS700C : Open Face | B : Black     | -L06 : 10W 600Lm   | Blank : 120V                    | -T30 : 3000K                             |
| WS730C : Bulls-Eye | W : White *   | -L15 : 20W 1,500Lm | UE : 120V/277V                  | -T40 : 4000K                             |
| WS734C : Cross Bar | S : Silver *  |                    | UE-D10 : 120V/277V 0-10 Dimming | -T50 : 5000K *                           |
|                    | BZ : Bronze * |                    | UE-EM : Remote Emergency Backup | -RGBW : Color Changing (Consult Factory) |

\* Special Order. Minimum order or extended lead time may apply. Consult Factory.