

LED DOWNLIGHT

ROUND AND SQUARE | LED CEILING DOWNLIGHT | 850LM-2,600LM

Housing

Constructed from a round high grade aluminum extrusion, die cast aluminum top plate, and faceplate with a powder coat finish. Includes COB LED, reflector, LED driver and a mounting plate. Top plate is secured to housing by threads. Mounting plate is secured to top plate with two (2) flat head Phillips stainless steel screws and installs onto a junction box. Consult factory for junction box mounting sizes.

Benefits

- Uniform, low glare illumination
- Durable, Corrosion-resistant finish
- Emergency back up available
- Singular COB Light Source
- 5 year limited warranty
- Dark Sky
- Tamper resistant



Dimming

(-DUN) option is a universal dimming system that works with most 3-Wire ELV, 2-Wire Incandescent and 5-Wire 0-10V fluorescent dimmers.



Finish

A 7-stage electrostatic, polymer process provides a finish that delivers outstanding durability, superior anti-aging, resistance to corrosion and UV-degradation. Standard finishes are White, Dark Silver, Basic Bronze, Black. Special order finishes are Light Silver*, Dark Grey*, Metallic Gold and Metallic Black*.

LED

Energy efficient Chip-On-Board (COB) Singular LED Light Source provides for smooth uniform light output, eliminating the multiple shadow effect seen by multiple LED Source products. Binned with 4-step MacAdam ellipses as recommended by ANSI Standard. Available in 4000K, 2700K*, 3000K, 3500K*, 5000K*, 5600K* and 590nm AMBER*.



Dark Sky

Dark Sky compliant.

Faceplate

Round one piece extruded aluminum with powder coat finish, clear tempered glass lens, and silicone o-ring. Faceplate is secured to the housing by threads.

Warranty

Covered by a 5 Year Warranty to be free of defects in materials and craftsmanship. Fixture should not be installed in applications with ambient temperature above 60 degrees C. Doing so will result in reduced lamp life and voided warranty.



* Special Order. Minimum order. Extended lead time may apply. Consult Factory.

** Select models.

Application

This DL Series covered ceiling mount downlight can be used in both interior and outdoor settings. Typical locations are in commercial and retail spaces that require lighting from above. Dark Sky compliant.


4" CEILING MOUNT LED DOWNLIGHT

DL340 | ROUND 1,000LM/1,500LM | IP65 | 11W



6" CEILING MOUNT LED DOWNLIGHT

DL360 | ROUND 1,000LM-2,600LM | IP65 | 15W

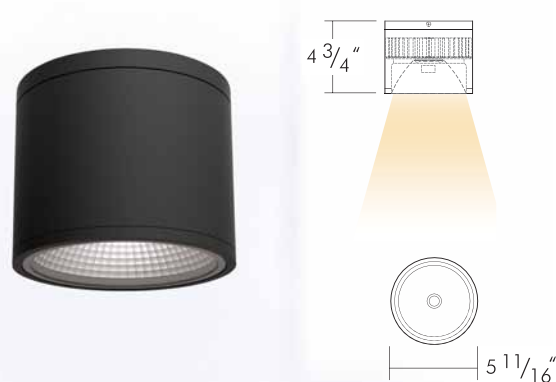


4" CEILING MOUNT LED DOWNLIGHT

DLQ340 | SQUARE 850LM/1,300LM | IP65 | 15W



6" CEILING MOUNT LED DOWNLIGHT

DLQ360 | SQUARE 1,000LM-2,600LM | IP65 | 15W

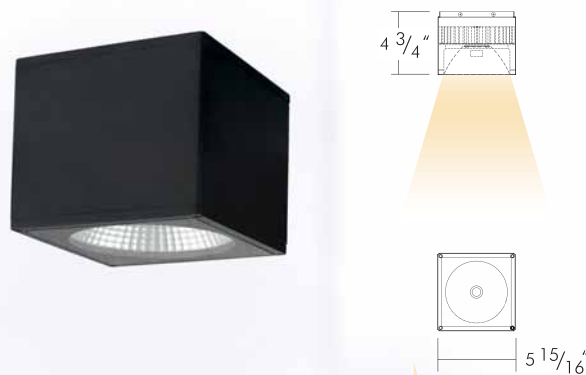

ORDERING ROUND & SQUARE CEILING DOWNLIGHT

Example: **DLQ340B-T27-EMAC**

ITEM	FINISH	BEAM SPREAD	DIMMING	LED	OPTION
DL340	W: White	Blank: Wide Flood	Blank: Non Dimming (120V)	Blank: 4000K	Blank: None
DL360	DS: Dark Silver	-B02: 2° Pencil Beam	UE-DUN: UniDim™ (120V/277V)	-T17: 1700K**	-EMAC: Emergency Back Up
DLQ340	BZ: Basic Bronze	-B10: Narrow Spot	DUN: UniDim™ ^	-T25: 2500K**	-LVR: Hex-Cell Louver +
DLQ360	B: Black	-B20: Spot	-DIN: 120V/2-Wire ELV Dimming (for DL340 only)	-T27: 2700K*	-SDL: Daylight Sensor (DLQ360 only).
	LS: Light Silver*	-B45: Flood		-T27-C97: 2700K, 97CRI***	
	S: Dark Grey*	-BWW: Wall Wash Optics		-T30: 3000K	
	MG: Metallic Gold*			-T30-C97: 3000K, 97CRI***	
	MB: Metallic Black*			-T35: 3500K*	
				-T50: 5000K*	
				-T56: 5600K*	
				-TAM: 590nm Amber* **	

* Special order, minimum order, and extended lead time may apply. Consult factory. ** Extended Lead Time may apply. Consult Factory.

***Only available in 2700K and 3000K. + Only for DLQ340 and DLQ360. ** Only for DL360 and DLQ360. ^ Not for use with flat J-Box and only for DL340.