

LED ACCENT BAR (9W) 540 LM - (18W) 1,080 LM**WET LOCATION** | RIGID | ARCHITECTURAL LINEAR LED LIGHTING

Linear LED Lighting for damp and wet locations including kitchens, baths, wet bars, spas and covered outdoor spaces. Perfect for applications where moisture caused by steam, fog, rain, humidity and the presence of water can destroy regular linear LED lighting.

Features & Benefits:

Retail | Residential | Commercial | Exhibition | Kitchen


- No Dark Spots with onboard couplers
- Water tight end-to-end couplers seal out moisture
- High density LEDs populated onto a metallic base and sealed in silicone
- Long, seamless 20ft. runs with in-line power feed
- Powerful: 270 Lumens per foot
- High Density: 18 LEDs per foot for smooth illumination
- Available in 24" and 48" lengths
- Versatile ELV & 0-10V Dimmable & 277V Driver Options
- 80+ CRI for excellent color rendering
- Mounting hardware included

- Lamp Life: 25,000 hours L70 calcs from LM80 tests
- LED Color Temperature: 3,000K Warm White (CRI 80+)
- Optional LED Colors: Blue, Green, Amber, Red & RGB are special order
- LED Beam Curve: 120° Standard




LED ACCENT BAR (9W) 540 LM - (18W) 1,080 LM

WET LOCATION | RIGID | ARCHITECTURAL LINEAR LED LIGHTING

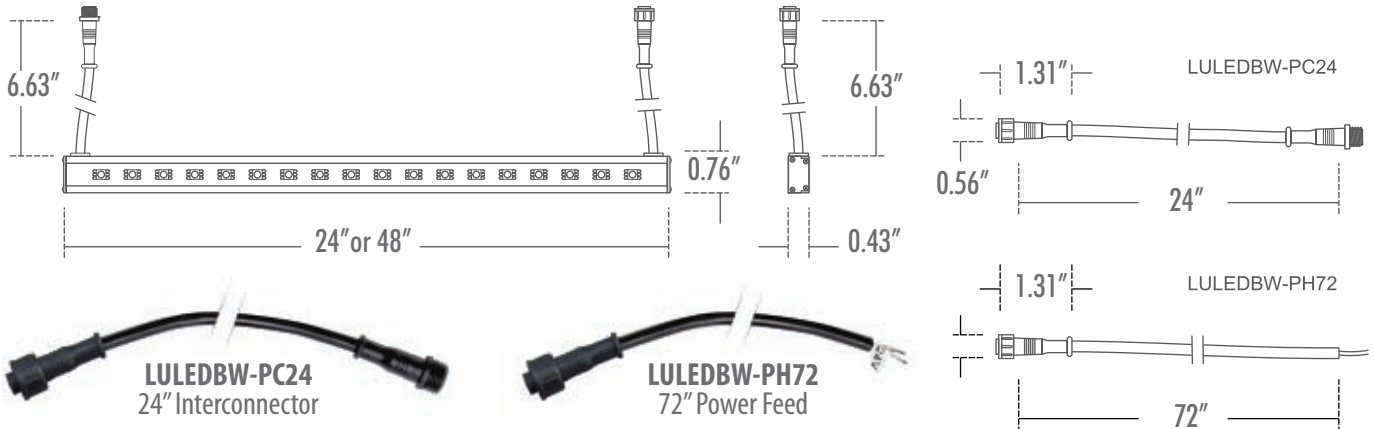

ZONAL LUMEN SUMMARY



ZONE	LUMENS	% FIXT
0 - 30	132.96	28.80
0 - 40	217.52	47.10
0 - 60	384.36	83.30
0 - 90	461.40	100.00

FOOTCANDLES

DISTANCE	WIDTH	FC
1'	2.0	30.00
2'	2.5	15.00
3'	3.5	7.50
4'	4.0	4.95

WET LOCATION LED BAR ORDERING

Example: **LULEDBW24-30**

CATALOG #	LENGTH	# OF LED	LED COLOR	WATTAGE	LUMENS
LULEDBW24	24"	36 LED	-30 : 3000K	9W	540 Lm
LULEDBW48	48"	72 LED		18W	1080 Lm

POWER SUPPLIES

POWER SUPPLIES	WATT.	DIMMING	POWER METHOD	LIST.	DIMENSIONS
LD5V24-24-PI	24W	N/A	AC Plug-in ²	ETL	3.82" x 2.16" x 1.54"
LD529V024-10	10W	N/A	Hardwire ^{1,2}	UR	5.00" x 5.00" x 1.00"
LD533V024-60-DLV-JB	60W	Electr. Low Volt.	Hardwire ^{1,2,3}	ETL	8.19" x 2.06" x 1.75"
LD533V024-96-DLV-JB	96W	Electr. Low Volt.	Hardwire ^{1,2,3}	ETL	9.25" x 3.44" x 1.94"
LD533V024-200-DLV-JB	200W	Electr. Low Volt.	Hardwire ^{1,2,3}	ETL	9.25" x 3.44" x 1.94"
LD533V024-1227-60-D10	60W	0-10V	Hardwire ^{1,2}	UR	8.38" x 1.69" x 1.19"
LD533V024-1227-100-D10	100W	0-10V	Hardwire ^{1,2}	UR	8.31" x 2.38" x 1.38"

ACCESSORIES

ACCESSORIES	DESCRIPTION	LENGTH
LULEDB-BR30	30° Clip	
LULEDB-CC48	Clear Cover	48"
LULEDB-FC48	Frosted Cover	48"
LULEDBW-PC24	Inter-Power Connector	24"
LULEDBW-PH72	End Feed Connector	72"

¹Add -PI for US Wall Plug

²Requires LUTKLED-PH40

³277V Option