

▶ LINKALED BAR LULEDB* S E R I E S

Accent Lighting of coves, kick space, inside and under cabinets, recreation vehicles, wine racks, and other high power linear lighting applications

▶ Features & Benefits:

- **No Dark Spots** with On-Board Connectors.
- **Seamless Runs** with In-Line Power Feed.
- **Coupler Included**
Easy to install for end-to-end connections.
- **Modular**
No soldering or flimsy connectors, plug-and-play.
- **0° Bracket and Mounting Hardware** - Included
- **30° Mounting Hardware** - Optional
- **2-Year Warranty**

* 60 Lumens per watt
when using 4000K

Ordering ▶
(See Next Page)

▶ Retail Shelves | Kitchens | Displays

Lamp Life

35,000 hours of life with
70% of initial lumens.

LED Color Temperature

3,000K Warm White or
4,000K Neutral White @ 80+ CRI.

Optional LED Colors


Blue, Green, Amber, Red and
RGB are special order.

LED Lamp Distribution

Standard 120°. **Listing** ETL Listed (Class 2 LED system).




LULEDB




Available in 4", 12", 24" and 48"


Without cover

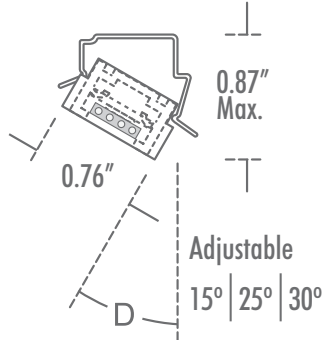

With cover

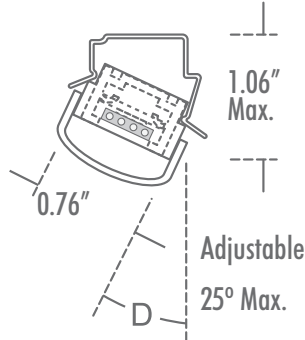


Shown with optional **LULEDB-BR30** : 30° Mounting Clip.

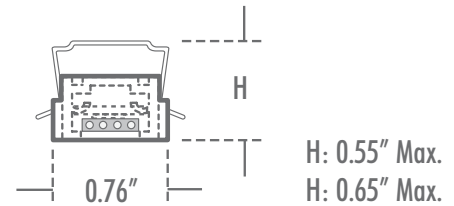

Shown with 0° Mounting Clip (Included).

► Zonal Lumen Summary | LULEDB12-30

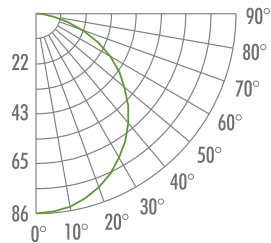

Zone	Lumens	% Fixt
0 - 30	66.48	28.80
0 - 40	108.76	47.10
0 - 60	192.18	83.30
0 - 90	230.70	100.00

► Footcandles | LULEDB12-30


Distance	Width	Fc
1'	2.0	20.0
2'	2.5	10.0
3'	3.5	5.0
4'	4.0	3.3

► Ordering


Example: **LULEDB12-40**

Catalog#	LED Color	Length	Wattage	# of LED	Lumens
LULEDB4-30	3000K	4"	1.5W	6	67 Lm
LULEDB12-30	3000K	12"	4.5W	18	231 Lm
LULEDB24-30	3000K	24"	9.0W	36	504 Lm
LULEDB48-30	3000K	48"	18.0W	72	1008 Lm
LULEDB4-40	4000K	4"	1.5W	6	92 Lm
LULEDB12-40	4000K	12"	4.5W	18	277 Lm
LULEDB24-40	4000K	24"	9.0W	36	605 Lm
LULEDB48-40	4000K	48"	18.0W	72	1210 Lm


SEE NEXT PAGE FOR AVAILABLE **ACCESSORIES AND POWER SUPPLIES ORDERING.**

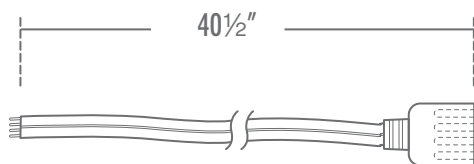

LUTKLED-PH40
Power Feed Connector

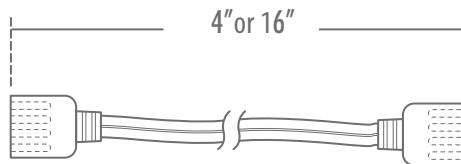

LUTKLED-PC04 / LUTKLED-PC16
In-Line Connector




► Accessories Ordering

	Catalog#	Description	Length
	LUTKLED-PH40	End Feed Connector: Connects LinkaLED Bar to Driver	40 1/2"
	LUTKLED-PC04	Power Inter-Connect: Connects 2 sections of LinkaLED Bar	4"
	LUTKLED-PC16	Power Inter-Connect: Connects 2 sections of LinkaLED Bar	16"
	LULEDB-BR30	30° Mounting Clip: Allows LinkaLED Bar to be mounted at 15°, 25°, 30° angle	--
	LULEDB-CC48	Clear Cover: Protects LinkaLED Bar from contaminants	48"
	LULEDB-FC48	Frosted Cover: Reduces glare and protects LinkaLED Bar from contaminants	48"

► Power Supplies Ordering

Catalog#	Watt.	Dimming	Power Method	Listing	Finish	Dimensions
LD522V024-60-DLV	60W	Magnetic Low Volt.	Hardwire J-Box	ETL	Black	6.50" x 2.62" x 2.25"
LD522V024-100-DLV	100W	Magnetic Low Volt.	Hardwire J-Box	ETL	Black	9.94" x 3.06" x 2.87"
LD522V024-200-DLV	200W	Magnetic Low Volt.	Hardwire J-Box	ETL	Black	7.00" x 3.13" x 3.38"
LD5V24-24-PI	24W	Not Applicable	AC Plug-In	UL	Black	3.82" x 2.16" x 1.54"
LD5V024-60	60W	Not Applicable	Hardwire	UR	White	8.25" x 1.63" x 1.13"

60W/100W

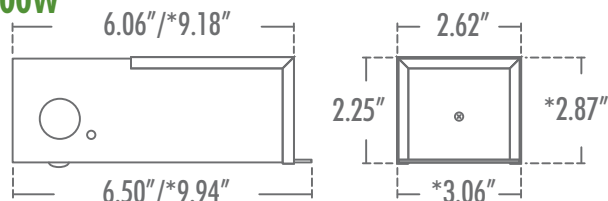

*Dimensions for 100W

WALL MOUNT

