
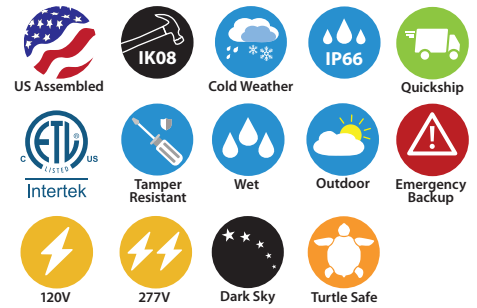


BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN

6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

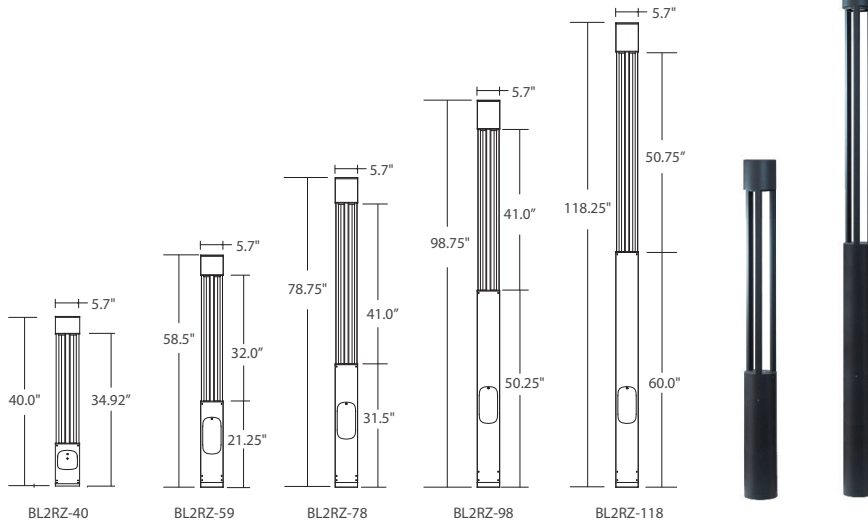

- Up to 50W, 2600lm delivered
- Dark Sky Compliant
- U.S. Assembled
- Tamper Resistant Hardware
- IK08 Impact Rating
- Integral Emergency Option
- Optional Photocell Sensor
- Quick Ship Options Available
- 90 CRI Standard, 80 CRI on 5000K

ORDERING : BL2RZ-78B-L24-ASY-WUE-D10-T30-C90-SRG

BL2RZ

Fixture Height Finish Lumens Optic Driver LED Options

Height		Lumens		Driver		Options	
40" Bollard	-40¹	1000lm (20W)	-L18	Non-Dimming (120V)	Blank	None	Blank
59" Light Column	-59	1400lm (27W)	-L24	ELV and TRIAC Dimming (120V)	-DIN	Photocell Sensor (120V/277V)	-UE-SDL⁵
78" Light Column	-78	2200lm (42W)	-L30	0-10V Dimming (120V/277V)	UE-D10	Surge Protector	-SRG⁵
98" Light Column	-98	2600lm (50W)	-L34^{2,4}	UniDim™ (120V/277V)	UE-DUN	Integral Emergency Battery	-EMAC⁵
118" Light Column	-118¹			347V	-347	Frosted Lens	-FR
Finish		Optic		DALI Dimming		LED	
Black	B	Symmetric Narrow (45°)	-SYM-N		-DLI¹	2700K (90CRI)	-T27-C90
White	W¹	Symmetric Wide (75°)	-SYM-W			3000K (90CRI)	-T30-C90
Silver	S¹	Asymmetric Forward Throw	-ASY-FT			3500K (90 CRI)	-T35-C90
Basic Bronze	BZ¹	Asymmetric Wide	-ASY-W			4000K (90 CRI)	-T40-C90
						5000K (80 CRI)	-T50
						590nm Amber (Turtle Safe)	-TAM-LVR⁶

¹ Special order. Minimum order quantity, extended lead time, and setup fee may apply. Consult factory.

² For BL2RZ-98 and BL2RZ-118 only.

³ Starting Temperature -40°C/-40°F.

⁴ (-L34) and (-CW) only compatible for (-347) driver.

⁵ Not rated for cold weather. Minimum fixture outdoor temperature 0°C/32°F.

⁶ (-TAM-LVR) option only available with Lumens -L18 and -L24.

Consult factory for possible additional options including: USB, AC outlet, speaker hubs, wireless, node mounting, PC/Motion sensor, 7-pin photocell receptacle (C136.41 compliant) only w/shorting cap, accepts standard twist-lock photocell or PC/Control Node for wireless dimming control.

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN

6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

SPECIFICATION

Application

6" diameter LumenPole Light Columns and Bollards are designed for architectural relevance to intimate indoor and outdoor environments where pedestrian level illumination is required. The LED COB with reflector provides illumination downward on the ground to light walkways, public gathering spaces, gardens, along waterfronts and marinas and other public and private areas. Typical applications include residential, commercial, and retail.

Housing & Arms

Housing and Arms are constructed from curvilinear and trapezoid shaped high-grade robust aluminum extrusion. A clear tempered glass lens is sealed to the Faceplate with a silicone O-ring. The Faceplate and end caps are die-cast aluminum and seal the housing (top and bottom) using silicone O-rings. A fabricated aluminum mounting plate installs onto supplied stainless steel anchor bolts and secures to the housing with countersunk, Phillips head, stainless steel screws.


Mounting

Mounting:

The 5.7" round mounting plate with U-bracket installs supplied stainless steel anchor bolts (or other hardware) on a solid substrate. For specific mounting options see installation instructions.

Finish

A 7-stage electrostatic, polymer process provides an outdoor powder coat finish that delivers outstanding durability, superior anti-aging, resistance to corrosion and UV-degradation.



Standard Finishes:

White: RAL 9005 (B)
Silver: RAL 7037 (S)
Bronze: RAL 8019 (BZ)
Black: RAL 9005 (B)

Consult factory for Custom Color.

Paint does not contain any copper compounds or elements.

Certifications and Listings



ETL / cETL Listed to UL1598 and UL8750 standards.

Suitable wet locations. (IP66)

Assembled in USA.

Dark Sky - Dark Sky compliant.

IK08 rated - Protected against 5 joules impact. Equivalent to impact of 1.7 kg mass dropped from 300 mm above impacted surface.

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN

6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

SPECIFICATION (Continued)

Caution

LITON recommends use of surge protectors on incoming power. Locate them in the most convenient servicing location. Surge damage is not covered by warranty.

Warranty

Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship. Fixture should not be installed in applications with ambient temperature above 60°C. Doing so will result in reduced lamp life and voided warranty.

Optics

Multifaceted aluminum coated reflectors produce Symmetric Narrow (-SYM-N) 45°, Symmetric Wide (-SY-W) 75°, Asymmetric Forward Throw (-ASY-FT), and Asymmetric Wide (-ASY-W) distributions.

LED

COB (Chip on Board) singular LED light source provides for smooth, uniform light output, eliminating the multiple imaging produced by multiple LED source optics. Binned with 4-step MacAdam ellipses as per ANSI Standard recommendation.

Lumen Maintenance

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Lumen Options (Delivered)

1000lm (20W), 1400lm (27W), 2200lm (42W), 2600lm (50W)

Color Temperature

COLOR TEMP:	2700K	3000K	3500K	4000K	5000K
CRI:	90	90	90	90	80

Amber: 590nm (Turtle Safe)



Quick Ship Items

BL2RZ-59B-Lxx-SYM-WUE-DUN-T27-C90
BL2RZ-59B-Lxx-SYM-WUE-DUN-T30-C90
BL2RZ-59B-Lxx-SYM-WUE-DUN-T35-C90
BL2RZ-59B-Lxx-SYM-WUE-DUN-T40-C90
BL2RZ-59B-Lxx-SYM-NUE-DUN-T27-C90
BL2RZ-59B-Lxx-SYM-NUE-DUN-T30-C90
BL2RZ-59B-Lxx-SYM-NUE-DUN-T35-C90
BL2RZ-59B-Lxx-SYM-NUE-DUN-T40-C90

BL2RZ-78B-Lxx-SYM-WUE-DUN-T27-C90
BL2RZ-78B-Lxx-SYM-WUE-DUN-T30-C90
BL2RZ-78B-Lxx-SYM-WUE-DUN-T35-C90
BL2RZ-78B-Lxx-SYM-WUE-DUN-T40-C90
BL2RZ-78B-Lxx-SYM-NUE-DUN-T27-C90
BL2RZ-78B-Lxx-SYM-NUE-DUN-T30-C90
BL2RZ-78B-Lxx-SYM-NUE-DUN-T35-C90
BL2RZ-78B-Lxx-SYM-NUE-DUN-T40-C90

Electrical

LED Driver: AC 50/60Hz Electronic Direct Current Class 2 driver integrally mounted. Incoming power connects to Terminal Blocks. Power Factor > 0.90.

Minimum Operating Temperature:

Standard driver: -30°C/-22°F

Cold Weather driver: -40°C/-40°F


Additional Options

Photocell (-UE-SDL): For 120V/277V input. Installed internally in fixture. Sensor provides a smart lighting control for energy efficient lighting.



Surge Protector (-SRG): Protects driver against surges in line voltage/current (20KV, 1.2/50µs & 10KA, 8/20µs).

At end-of-life Suppressor opens the circuit to protect the driver. Surge suppressor is a perishable device requiring periodic replacement. Not a warranted item.



Frosted Lens (-FR): Diffuses pattern to reduce shadowing from vertical support arms.



SPECIFICATION (Continued)

Dimming Options

ELV and TRIAC Driver 120V (-DIN):

Compatible with electronic low voltage, and 2-Wire incandescent dimmers. Also known as leading edge, Reverse Phase, Forward Phase dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations.


0-10V Driver 120V/277V (UE-D10):

Compatible with most existing 0-10V systems. Also known as fluorescent or 5-Wire dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations. Compatible with daylight harvesting controls.


UniDim™ Driver 120V/277V (UE-DUN):

All in one ELV and TRIAC phase dimming (120V only), and 0-10V dimming (120V/277V). Works with most 3-Wire ELV, 2-Wire incandescent and 120V/277V 5-Wire 0-10V fluorescent dimmers.


Incandescent/Phase Wiring
ELV

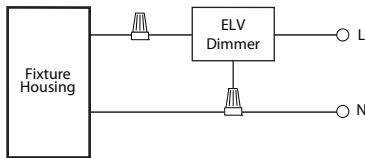


TRIAC

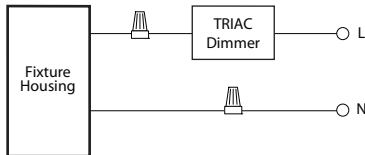


0 - 10V Wiring

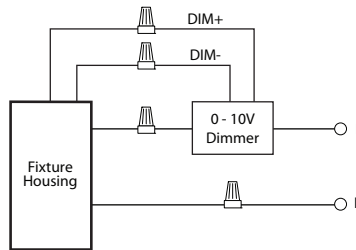


Incandescent/Phase Wiring
ELV

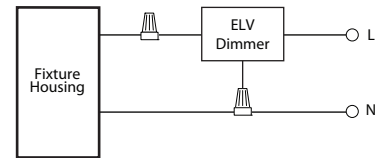

TRIAC

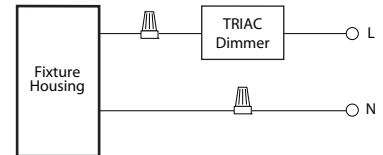

0 - 10V Wiring

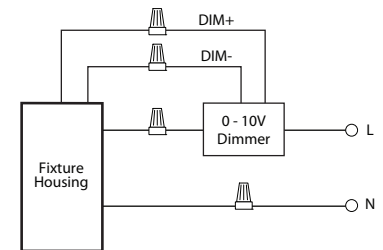

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN

6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

SPECIFICATION (Continued)

Integral Emergency Battery (-EMAC)

Integrally mounted inside fixture. Upon failure of normal utility power, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes.


Level A Sound Rating.

Battery Operates @ 0°C to 40°C ambient (32°F to 104°F).

Battery re-charge within 24 hours.


The battery is a maintenance-free, environmentally friendly Lithium Iron Phosphate with 50,000 hour life. A low voltage battery disconnect feature protects the battery from damage during prolonged power failures. Self-diagnostic feature monitors LED status, emergency LED driver circuit, battery capacity and charger function and displays any fault detection via test switch.

<40W LOAD

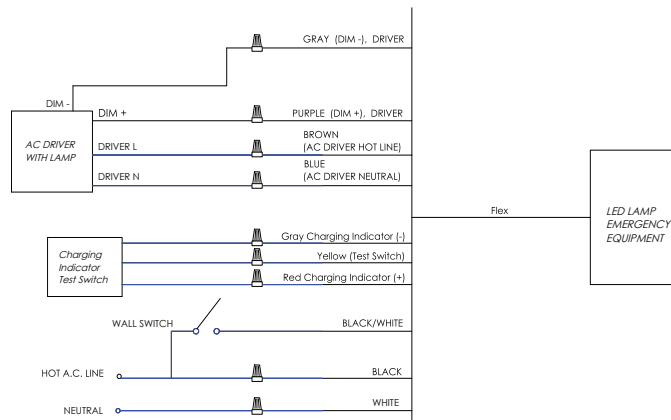

Input Voltage:	120-277VAC/60Hz
Output Voltage:	170VDC (120VAC Equivalent)
Wattage:	40W
Switching Time:	<1s
Charging Time:	24h
Operating Time:	90 minutes
Minimum Temperature:	0°C
Maximum Temperature:	50°C
Maximum Lumens:	2500lm

>40W LOAD

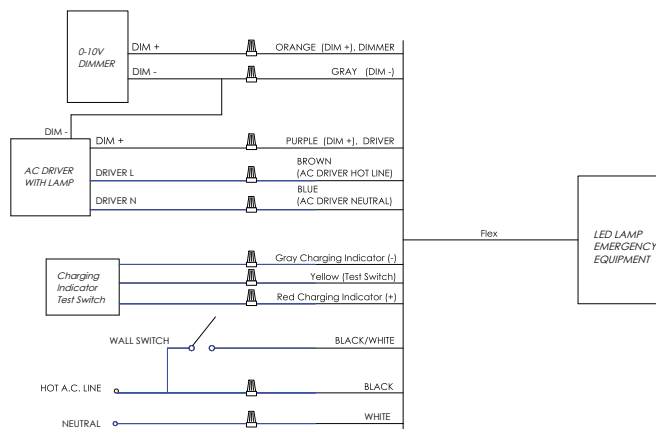

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN


6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

PHOTOMETRY

BL2RZ-59-B-L30-SYM-N-T30-C90 (59" Height, 2200lm*, 42W, Symmetric Narrow, 45°, 3000K)


System Power: 42.9W
Test Date: 09/2023
Beam Angle 50%: 21.0°
Field Angle 10%: 85.2°
Color Temperature: 3000K
CRI: 90
Lumens Delivered: 2211
CBCP: 3185
Power Factor: 0.9

MULTIPLIERS	
LUMEN PACKAGE	
L18	0.45
L24	0.62
L30	1.00
L34	1.17
CCT	
2700K	0.94
3000K	1.00
3500K	1.03
4000K	1.07

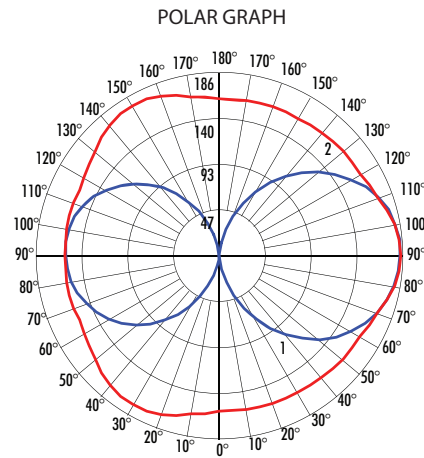

FOOTCANDLES ON GROUND
2 Fixture Overlap, 12 Ft. Spacing
4.46 Ft. Light Source Mtg. Ht., 2211 lm

1 fc .5 fc .2 fc .1 fc

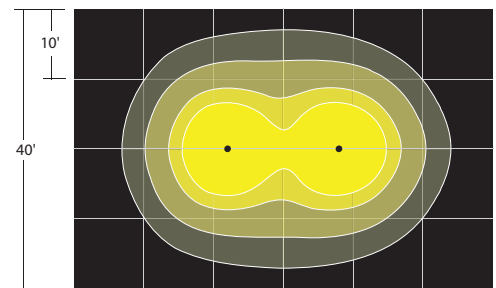


Maximum Candela = 186 Located At Horizontal Angle = 0, Vertical Angle = 95
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (95) (Through Max. Cd.)

LCS TABLE

BUG RATING	B2-U0-G0	
FRONT	Lumens	Lumens %
Low (0°-30°)	0.0	28.8%
Medium (30°-60°)	419.8	19.0%
High (60°-80°)	10.2	0.5%
Very High (80°-90°)	0.8	0.0%
BACK	Lumens	Lumens %
Low (0°-30°)	0.0	30.6%
Medium (30°-60°)	456.4	20.6%
High (60°-80°)	10.2	0.5%
Very High (80°-90°)	0.9	0.0%
UPLIGHT	Lumens	Lumens %
Low (90°-100°)	0.0	0.0%
High (100°-180°)	0.0	0.0%

LCS GRAPH

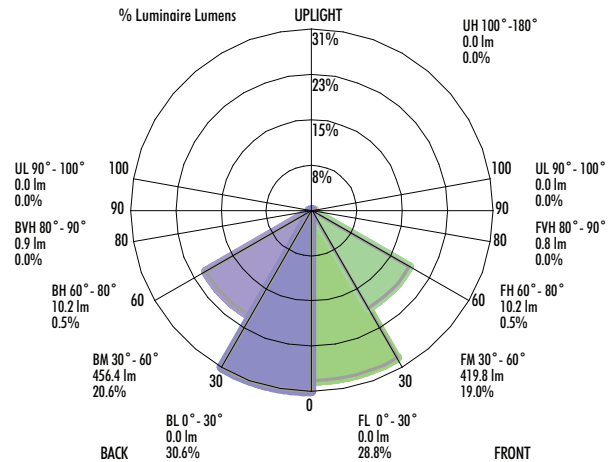

*Lumens delivered

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN


6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

PHOTOMETRY (Continued)


BL2RZ-59-B-L30-SYM-W-T30-C90 (59" Height, 2200lm*, 42W, Symmetric Wide, 75°, 3000K)

System Power: 42.9W
Test Date: 09/2023
Beam Angle 50%: 20.8°
Field Angle 10%: 99.8°
Color Temperature: 3000K
CRI: 90
Lumens Delivered: 2187
CBCP: 1932
Power Factor: 0.9

MULTIPLIERS	
LUMEN PACKAGE	
L18	0.45
L24	0.62
L30	1.00
L34	1.17
CCT	
2700K :	0.94
3000K :	1.00
3500K :	1.03
4000K :	1.07

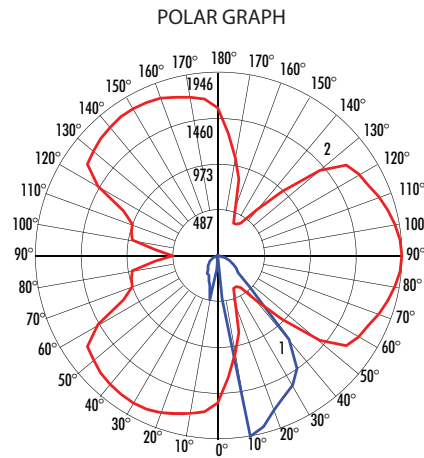

FOOTCANDLES ON GROUND
2 Fixture Overlap, 17 Ft. Spacing
4.46 Ft. Light Source Mtg. Ht., 2187 lm

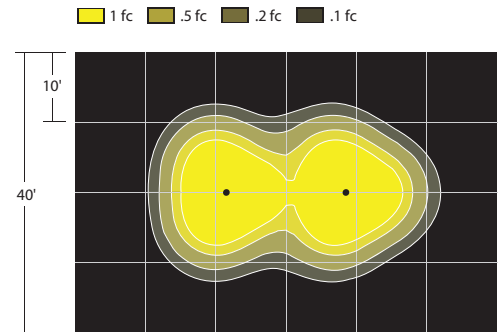


Maximum Candela = 1946 Located At Horizontal Angle = 0, Vertical Angle = 10
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

LCS TABLE

BUG RATING	B2-U0-G0	
FRONT	Lumens	Lumens %
Low (0°-30°)	0.0	20.4%
Medium (30°-60°)	496.2	22.7%
High (60°-80°)	55.3	2.5%
Very High (80°-90°)	1.8	0.1%
BACK	Lumens	Lumens %
Low (0°-30°)	0.0	24.8%
Medium (30°-60°)	586.7	26.9%
High (60°-80°)	55.7	2.6%
Very High (80°-90°)	1.7	0.1%
UPLIGHT	Lumens	Lumens %
Low (90°-100°)	0.0	0.0%
High (100°-180°)	0.0	0.0%

LCS GRAPH

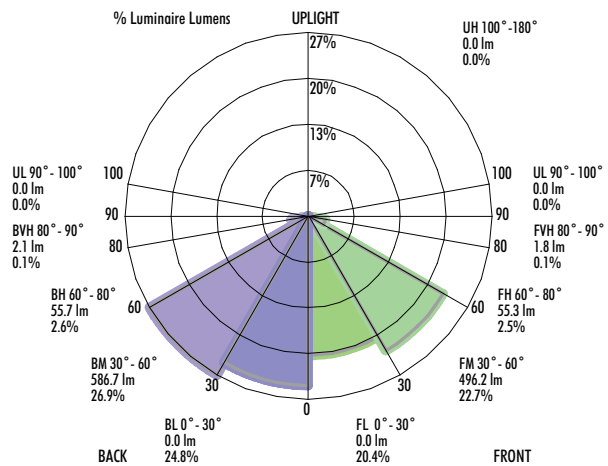

*Lumens delivered

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN


6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

PHOTOMETRY (Continued)


BL2RZ-59-B-L30-ASY-FT-T30-C90 (59" Height, 2200lm*, 42W, Asymmetric Forward Throw, 3000K)

System Power: 42.9W
Test Date: 09/2023
Beam Angle 50%: 64.6°
Field Angle 10%: 108.5°
Color Temperature: 3000K
CRI: 90
Lumens Delivered: 2030
CBCP: 1673
Power Factor: 0.9

MULTIPLIERS	
LUMEN PACKAGE	
L18	0.45
L24	0.62
L30	1.00
L34	1.17
CCT	
2700K	0.94
3000K	1.00
3500K	1.03
4000K	1.07

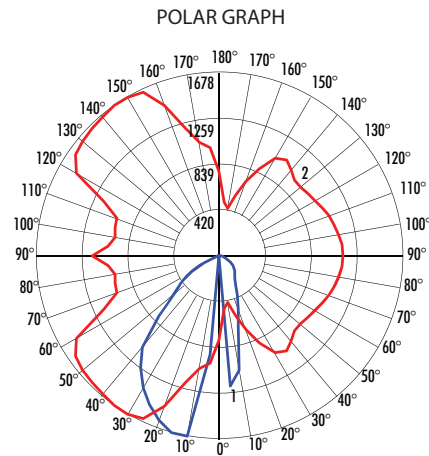

FOOTCANDLES ON GROUND
2 Fixture Overlap, 20 Ft. Spacing
4.46 Ft. Light Source Mtg. Ht., 2030 lm

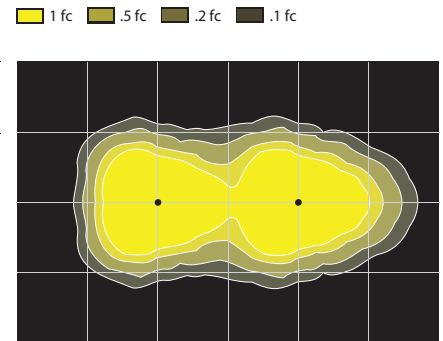


Maximum Candela = 1678 Located At Horizontal Angle = 0, Vertical Angle = 10
1 - Vertical Plane Through Horizontal Angles (125 - 305) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

LCS TABLE

BUG RATING		B1-U0-G0	
FRONT		Lumens	Lumens %
Low (0°-30°)	0.0	14.2%	
Medium (30°-60°)	408.7	20.2%	
High (60°-80°)	90.6	4.5%	
Very High (80°-90°)	3.4	0.2%	
BACK			
Low (0°-30°)	0.0	24.1%	
Medium (30°-60°)	670.5	33.1%	
High (60°-80°)	74.6	3.7%	
Very High (80°-90°)	2.0	0.1%	
UPLIGHT			
Low (90°-100°)	0.0	0.0%	
High (100°-180°)	0.0	0.0%	

LCS GRAPH

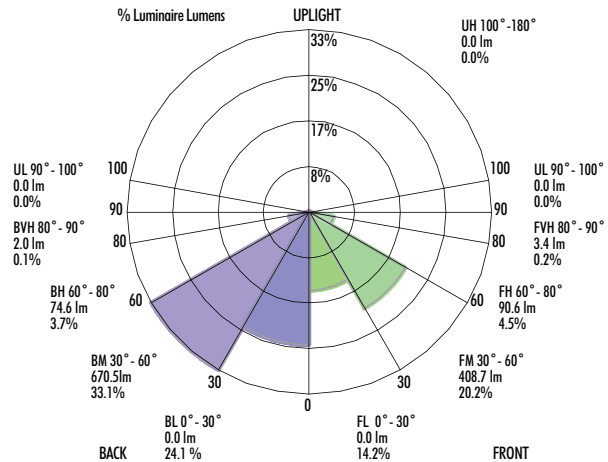

*Lumens delivered

BL2RZ : LUMENPOLE ROUND BOLLARD & COLUMN


6" OPEN FRAME - 40", 59", 78", 98", AND 118" HEIGHT
1000LM-2600LM (20W-50W)

PHOTOMETRY (Continued)


BL2RZ-59-B-L30-ASY-W-T30-C90 (59" Height, 2200lm*, 42W, Asymmetric Wide, 3000K)

System Power: 42.9W
Test Date: 09/2023
Beam Angle 50%: 19.9°
Field Angle 10%: 102.5°
Color Temperature: 3000K
CRI: 90
Lumens Delivered: 1928
CBCP: 1992
Power Factor: 0.9

MULTIPLIERS	
LUMEN PACKAGE	
L18	0.45
L24	0.62
L30	1.00
L34	1.17
CCT	
2700K :	0.94
3000K :	1.00
3500K :	1.03
4000K :	1.07

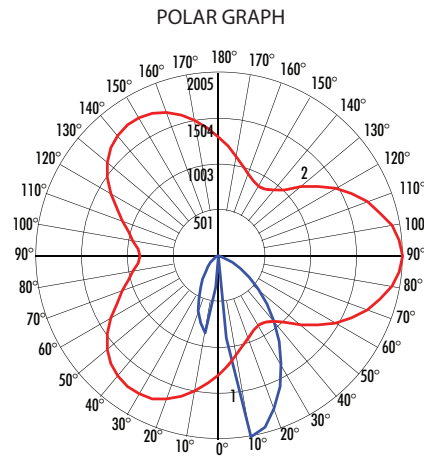

FOOTCANDLES ON GROUND
2 Fixture Overlap, 17 Ft. Spacing
4.46 Ft. Light Source Mtg. Ht., 1928 lm

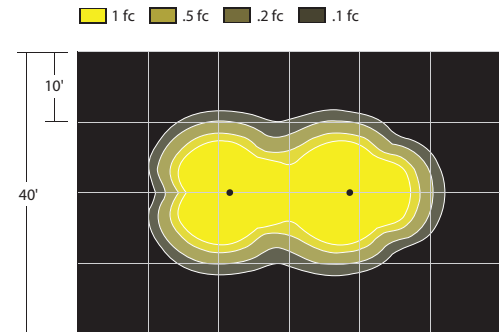


Maximum Candela = 2005 Located At Horizontal Angle = 0, Vertical Angle = 10
1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (10) (Through Max. Cd.)

LCS TABLE

BUG RATING	B1-U0-G0	
FRONT	Lumens	Lumens %
Low (0°-30°)	0.0	21.8%
Medium (30°-60°)	458.6	23.8%
High (60°-80°)	57.6	3.0%
Very High (80°-90°)	1.8	0.1%
BACK	Lumens	Lumens %
Low (0°-30°)	0.0	23.3%
Medium (30°-60°)	481.1	25.0%
High (60°-80°)	56.2	2.9%
Very High (80°-90°)	2.0	0.1%
UPLIGHT	Lumens	Lumens %
Low (90°-100°)	0.0	0.0%
High (100°-180°)	0.0	0.0%

LCS GRAPH

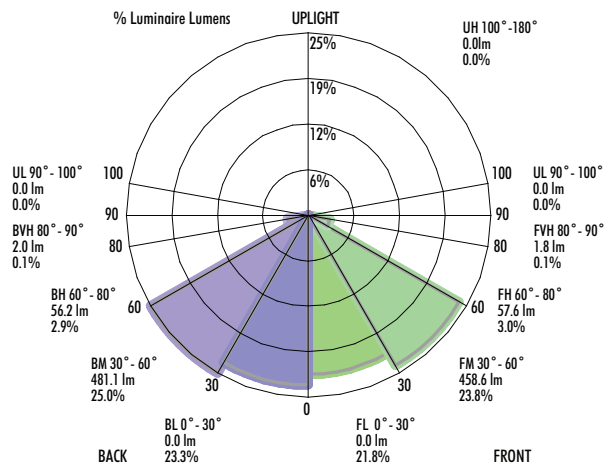

*Lumens delivered