
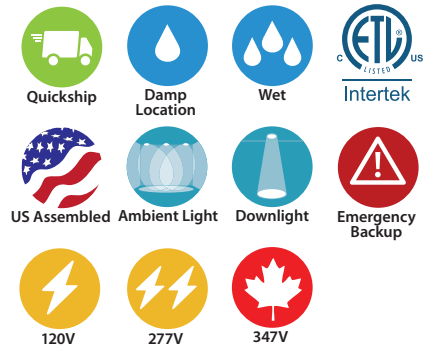


CRTR4SHL : 4" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL 900LM (14W)

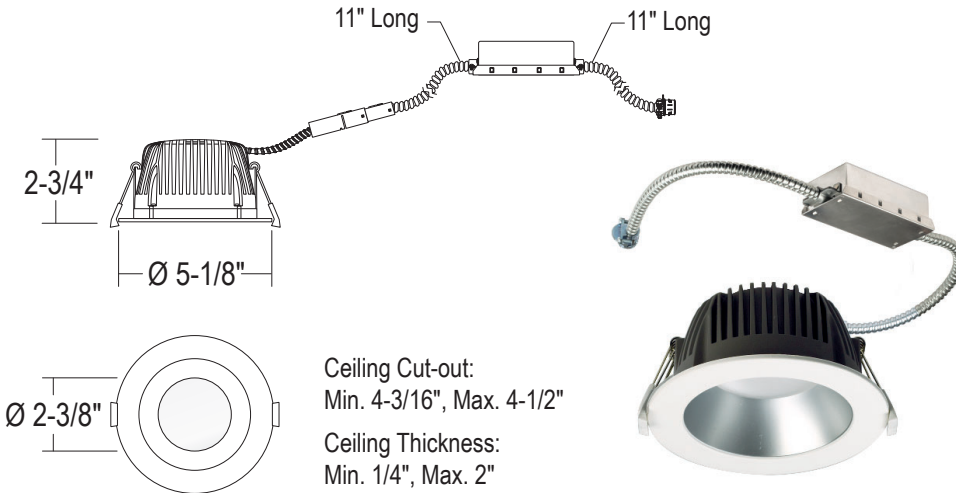

- Deeply recessed lens and 67.5° visual cutoff for reduced glare
- Shallow 2-3/4" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations
- 83 CRI

ORDERING : CRTR4SHL10SWUE-D10-T30

CRTR4SHL		Insulation Contact		Reflector Finish		Dimming		CCT		Options		Junction Box	
Fixture/Lumens	Insulation Contact		Reflector Finish	Dimming ¹		CCT	Options		Junction Box				
	Non-IC	Blank		0-10V Dimming	UE-D10		None	Blank					
	ICA Rated/	ICA		Lutron Hi-lume	UE-DHL²		Lens for wet locations	-LENS60					
	Airtight			120V ELV and	-DIN		w/ 60° Beam Spread						
				Triac Dimming			Lens for wet locations	-LENS110					
				347V, 0-10V Dimming	-347-D10		w/ 110° Beam Spread						
				Integral EM Backup	UE-D10-EM								
		Athena Wireless Node	-AWN										
		Athena Wireless Node	-AWN-OCC										
		Occupancy Sensor											
Fixture/Lumens	Reflector Finish		CCT		Junction Box								
900lm (14W)	CRTR4SHL10	Satin Haze Reflector/ White Ring	SW	3000K	-T30	None	Blank						
		White Reflector/ White Ring	WW	3500K	-T35	Junction Box	-JB						
		All Black	BB²	4000K	-T40	Junction Box	-JB-CHP						
		All Satin Haze	SS²			(Chicago Plenum)							

SPECIFICATION

Application

Architectural/Commercial-grade super-low glare, shallow recessed lensed LED luminaire is for new construction projects where there is minimal plenum air-space in ceiling. Deeply recessed lens provides reduced glare and visual comfort.

Retrofit Mounting

Designed for use with existing 4" Architectural, Incandescent, Fluorescent, and Metal Halide Housings like LITON Brand LV41, and LH400. Supplied with flexible metal conduit for connection to existing electrical junction box. Uses existing frame-in-kits mounting method via heavy duty tension springs. Consult factory for special mounting methods.

Color Temperature (CCT)



Available in 3000K, 3500K, 4000K, 83 CRI.

Insulation Contact

CRTR4SHL10 is inherently thermally protected for direct insulation contact without the need for an enclosure. NON-IC rated housings must be kept 3" from loose-fill insulation.

Power Connection

Our LED lamp array is replaceable via our on board quick disconnect terminal. Meets CA Title 24 Requirements and other standards restricting the use of Medium Base or Bi-Pin Sockets.

Thermal Management

Heat dissipation facilitated by a large exposed integral aluminum heat sink to maximize heat dissipation in an open-air environment. The recommended ambient temperature should be below 35°C to achieve a minimum L70 life of 50,000 hours according to the LM80 standard.

Reflector

Frosted polycarbonate lens pre-installed on reflector unifies diode sources and protects diodes from dust and particles from front of aperture.

Reflector Finish

1-piece, self-flanged LED design enables a clean trim finish without secondary trim ring. Heavy gauge aluminum reflector prevents ugly dents during shipping & installation. Deeply mounted singular LED provides 50° visual cutoff. Available in Satin Haze Reflector/White Finish, White Reflector/ White Finish, All Black, and All Satin Haze.

Non-Conductive Dead-Front Flange

(-LENS60) and (-LENS110) options feature non-conductive dead-front flange for wet locations.

SPECIFICATION (Continued)

Junction Box

16-gauge pre-wired galvanized steel Junction Box, 26 cubic-inch for a maximum of (8) #12 AWG wires. Furnished with (7) 1/2" knockouts. Strain clamps to install or remove covers for easy access and ground wire. (-CHP) option is Chicago Plenum, air-tight Junction Box.

Air Flow

IC-Rated/Airtight (ICA) reflector design is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute).

Certifications and Listings

cETLus listed. Suitable for dry and damp locations with wet location options available. NYC approved. Calendar #41937. Conforms to City of Chicago Environmental Air CCEA-200 with Section 18-27-300.22 and special requirements Section 14-20-210C-4. Assembled in USA.

Caution




LITON recommends use of surge protectors on the power entering LED Housings. Surge damage is not covered by warranty. (+1KV). Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.

Dimming Options


ELV and TRIAC Driver 120V (-DIN):

Compatible with electronic low voltage, and 2-Wire incandescent dimmers. Also known as leading edge, Reverse Phase, Forward Phase dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations.

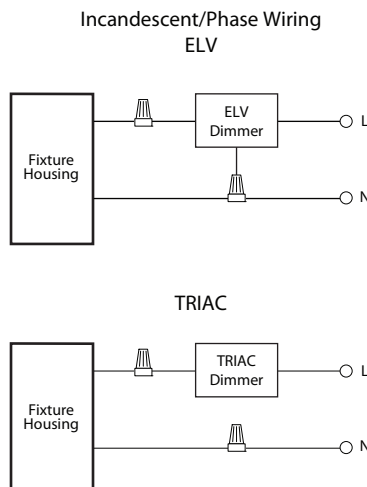

0-10V Driver 120V/277V (UE-D10):

Compatible with most existing 0-10V systems. Also known as fluorescent or 5-Wire dimming. Allows smooth dimming down to 5% depending upon the dimmer's limitations. Compatible with daylight harvesting controls.

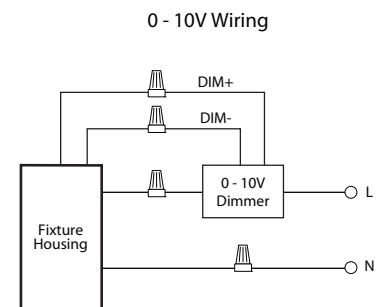

SPECIFICATION (Continued)

ATHENA WIRELESS NODE (-AWN, -AWN-OCC)

Radio frequency (RF) device for digital control of light fixtures in an Athena control system. Athena wireless processor or Clear Connect gateway-Type X is required to operate wireless node.

- Pre-Wired wireless node
- Installed on Junction Box outer wall
- 2.4 GHz
- cULus Listed (UL 916)
- UL 2043 Plenum Rated
- FCC compliant with the limits for a Class B digital device
- ANSI C1371.1 0-10V Electronic Off
- D4i certified
- IC (Industry Canada)
- Supports DALI-2 Type 8 tuneable-white color temperature Tc applications - IEC62386-209 ed.1

Warranty

Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C, installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.

Emergency Options


Emergency LED Battery Back-up available, remotely mounted adjacently by the installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included. Optional Generator Transfer Device switches the driver to auxiliary generator power during the loss of normal AC power, (recommended for applications requiring individual circuit switching).

INTEGRAL EMERGENCY BATTERY (UE-D10-EM): 10W

For installation away from the surface of the building in remote hidden location.

- Hidden Emergency Equipment
- Must be installed in Dry Locations
- 10W constant output to LED lamp

Not rated for outdoor mounting. Damp location rated.

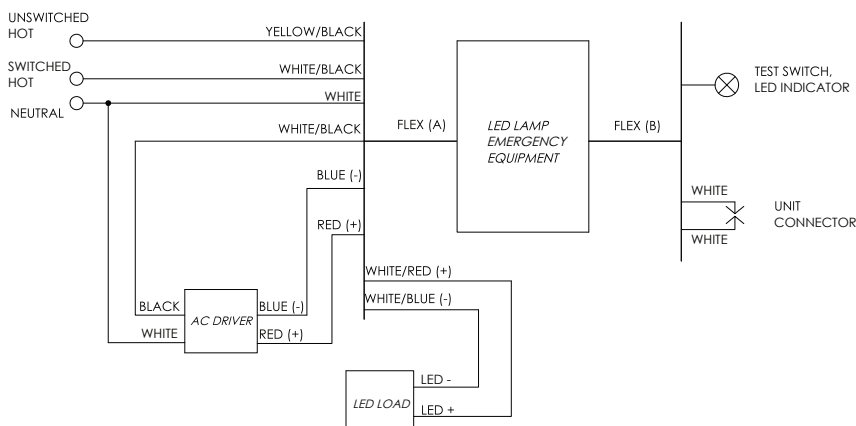

Input Voltage:	120-277VAC/60Hz
Output Voltage:	10W
Wattage:	10W
Switching Time:	<3s
Charging Time:	12h
Operating Time:	90 minutes
Minimum Temperature:	0°C
Maximum Temperature:	48°C
Maximum Lumens:	800lm
Self-Diagnostic:	Yes

PHOTOMETRY

CRTR4SHL10SWUE-D10-T40 (900lm, 14W, 4000K)

System Power: 14W

Test Date: 10/2023

Beam Angle 50%: 84.9°

Field Angle 10%: 125.7°

Color Temperature: 3907K

CRI: 82.2

Lumens Delivered: 861

CBCP: 473

Power Factor: 0.97

MULTIPLIERS

CCT

3000K: 0.92

3500K: 1.01

4000K: 1.00

Trim Color

SW: 1.00

WW: 1.09


Lens

Blank: 1.00

LENS60: 1.05

LENS110: 1.12

CANDELA TABULATION

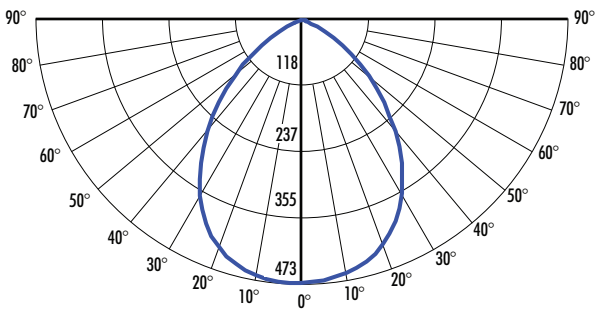

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	14.64'	7.39
10.0'	18.29'	4.73
12.0'	21.95'	3.29
14.0'	25.61'	2.41
16.0'	29.27'	1.85

CRTR4SHL10SWUE-D10-T40-LENS60 (900lm, 14W, 60°, 4000K)

System Power: 14W

Test Date: 10/2023

Beam Angle 50%: 60.7°

Field Angle 10%: 159.1°

Color Temperature: 3988K

CRI: 82.2

Lumens Delivered: 903

CBCP: 561

Power Factor: 0.97

MULTIPLIERS

CCT

3000K: 0.92

3500K: 1.01

4000K: 1.00

Trim Color

SW: 1.00

WW: 1.09


Lens

Blank: 1.00

LENS60: 1.05

LENS110: 1.12

CANDELA TABULATION

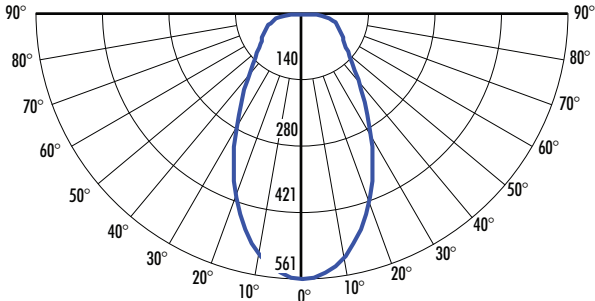

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	9.37'	8.76
10.0'	11.71'	5.61
12.0'	14.05'	3.90
14.0'	16.39'	2.86
16.0'	18.74'	2.19

CRTR4SHL10SWUE-D10-T40-LENS110 (900lm, 14W, 110°, 4000K)

System Power: 14W

Test Date: 10/2023

Beam Angle 50%: 107.6°

Field Angle 10%: 160.8°

Color Temperature: 4007K

CRI: 82.2

Lumens Delivered: 965

CBCP: 347

Power Factor: 0.97

MULTIPLIERS

CCT

3000K: 0.92

3500K: 1.01

4000K: 1.00

Trim Color

SW: 1.00

WW: 1.09


Lens

Blank: 1.00

LENS60: 1.05

LENS110: 1.12

CANDELA TABULATION

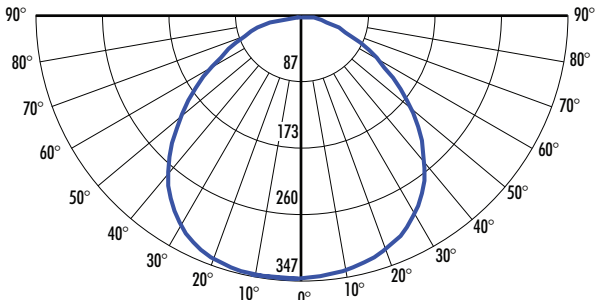

FOOTCANDLE DISTRIBUTION

Height	Beam Diameter	FC
8.0'	21.86'	5.41
10.0'	27.33'	3.46
12.0'	32.79'	2.41
14.0'	38.26'	1.77
16.0'	43.72'	1.35