


CRTR6SHL : 6" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL AMBER (TURTLE SAFE)
200LM - 250LM (10W - 12W)



Ceiling Cut-out: Min. 6-3/8", Max. 6-5/8"
Ceiling Thickness: Min. 1/4", Max. 2"

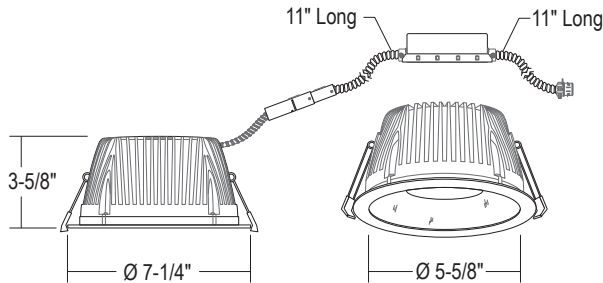

Quickship
 US Assembled
 Damp Location
 Emergency Backup

Wet
 Dedicated LED
 Ambient Light
 Downlight

ETL Intertek
 120V
 277V
 347V

Turtle Safe

- Deeply recessed lens and 65.5° visual cutoff for reduced glare
- Shallow 3-5/8" depth for ceilings with minimal plenum air-space
- New junction box option for remodels without frames
- Non-conductive dead-front flanged option (-LENS) for wet locations

ORDERING : CRTR6SHL10BBUE-D10-TAM

CRTR6SHL		Reflector Finish	Dimming	LED	Junction Box		
Fixture/Lumens							
200lm (10W)	CRTR6SHL10		0-10V Dimming	UE-D10			
250lm (12W)	CRTR6SHL12		120V ELV and Triac Dimming	-DIN			
			347V	-347			
			0-10V Dimming w/ 10W Emergency	UE-D10-EM			
Reflector Finish							
All Black	BB²						
				LED			
				Amber - Limited Wavelength - 590nm	-TAM		
						Junction Box	Blank
						Junction Box	-JB
						Junction Box (Chicago Plenum)	-JB-CHP

¹ All drivers are 120V/277V unless otherwise noted.
² Extended Lead Time. Consult Factory.

SPECIFICATION

Application

This Turtle Safe Commercial-grade LED recessed downlight retrofit is designed for low to high ceilings with existing open style frame. Lensed fixture.

Retrofit Mounting

Designed for use with existing 6" Architectural, Incandescent, Fluorescent, and Metal Halide Housings. Supplied with flexible metal conduit for connection to existing electrical junction box. Uses existing frame-in-kits mounting method via heavy duty tension springs. Consult factory for special mounting methods.

Driver

120V/277V AC 50/60Hz Electronic Direct Current Class 2. Input current 0.50 Amps at 115VAC. Power Factor > 0.90. Operating Temperature: -20°C to +50°C / -4°F to +131°F. Accessible from above or below ceiling.

(UE) Non-dimming (1220V/277V).

(UE-D10) 0-10V dimming works with most 5-wire, 0-10V dimmers. Factory qualified for use with Leviton IP710-DLZ.

(-DIN) dimming option smoothly dims down to 5% of initial light output with flicker-free performance. Works with standard 120V incandescent dimmers.

(-347) is a 0-10V driver that takes 347V input.

(UE-D10-EM) 0-10V with 10W Emergency backup works with most 120V/277V, 5-wire, 0-10V dimmers.

Emergency Options

Emergency LED Battery Back-up available, remotely mounted adjacent to housing by installer. When AC power fails, the device immediately switches to the emergency mode, operating the LEDs for a minimum of 90 minutes. Remote test switch and plate cover included.

Power Connection

LED lamp is replaceable via on board quick disconnect terminal. Meets CA Title 24 requirements and other standards restricting the use of Medium Base or Bi-Pin sockets.

Thermal Management

Heat dissipation facilitated by a large exposed integral aluminum heat sink to maximize heat dissipation in an open-air environment. The recommended ambient temperature should be below 35°C to achieve a minimum L70 life of 50,000 hours according to the LM80 standard.

SPECIFICATION (Continued)

Reflector


Frosted polycarbonate lens pre-installed on reflector unifies diode sources and protects diodes from dust and particles from front of aperture.

Reflector Finish

1-piece, self-flanged LED design enables a clean trim finish without secondary trim ring. Heavy gauge aluminum reflector prevents ugly dents during shipping & installation. Deeply mounted LED provides 50° visual cutoff. Available in Satin Haze Reflector/White Finish, White Reflector/White Finish, All Black, and All Satin Haze.

Color Temperature

Binned with 4-step MacAdam ellipses as per ANSI Standard recommendation.

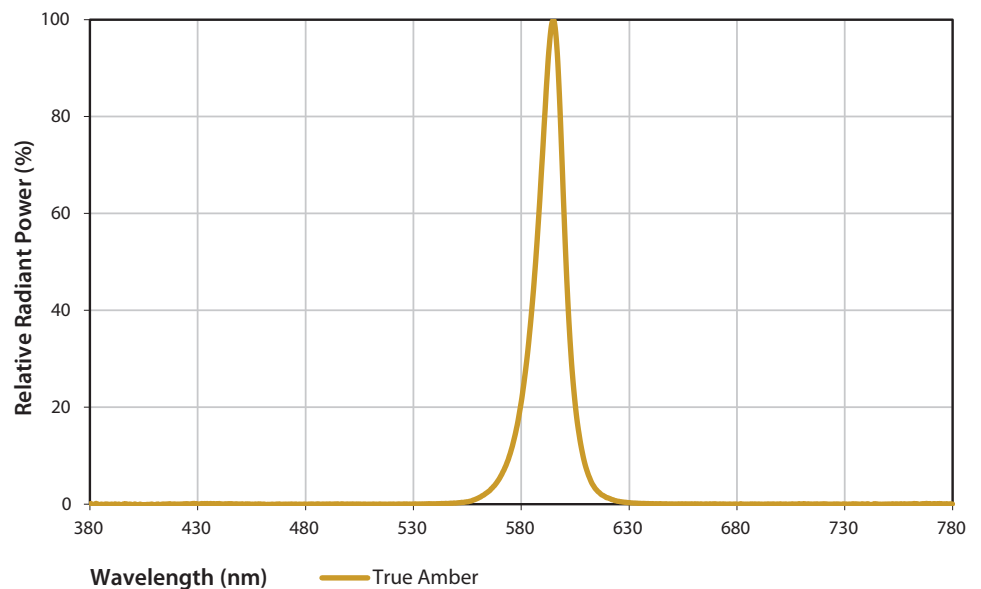

True Amber - Narrow Band LEDs centered at 590nm with no spectral content below 560nm are supplied.

Non-Conductive Dead-Front Flange

(-LENS60) and (-LENS110) options feature non-conductive dead-front flange for wet locations.

Junction Box

(-JB) option is 18-gauge pre-wired aluminum Junction Box, 18 cubic-inch for a maximum of (6) #12AWG wires. Furnished with (2) 1/2" knockouts. Strain clamps to install or remove covers for easy access and ground wire. (-JB-CHP) option is Chicago Plenum, air-tight Junction Box.



CRTR6SHL : 6" C-SERIES

SUPER LOW GLARE, SHALLOW LED RETROFIT/REMODEL AMBER (TURTLE SAFE)
200LM - 250LM (10W - 12W)

SPECIFICATION (Continued)

Airflow

Airtight reflector design is designed to restrict air flow from room into plenums in compliance to the WSEC - Washington State Energy Code, (Less than 2.0 CFM -Cubic Feet per Minute).

Certifications and Listings

cETLus listed. Suitable for dry and damp locations with wet location options available.
NYC approved. Calendar #41937. Conforms to City of Chicago Environmental Air CCEA-200 with Section 18-27-300.22 and special requirements Section 14-20-210C-4. Assembled in USA.

Lamp Equivalents

32W/42W CFL, 2 x 26W CFL.

Caution

Fixtures must be grounded in accordance with national, state and/or local electrical codes.
Failure to do so may result in serious personal injury.

Warranty

Covered by a 5-Year Warranty to be free of defects in materials and craftsmanship.
Recommended for applications where ambient temperatures do not exceed 35°C. Installations exceeding this temperature will result in reduced LED lamp life and a voided warranty.