
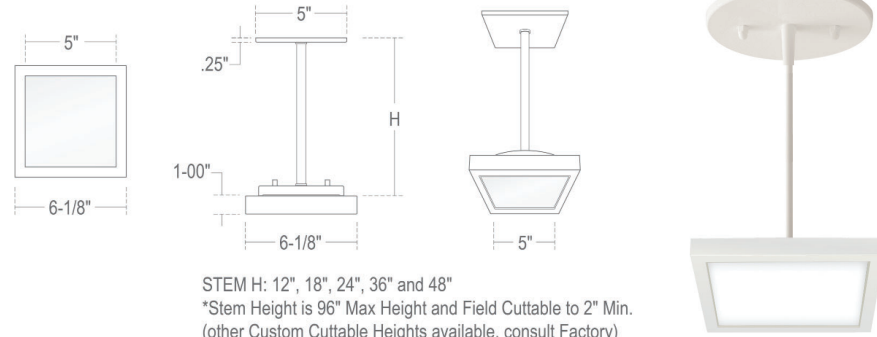


LCMPD5QP : 5" LUMENPAD SQUARE

LED DOWNLIGHT PENDANT MOUNT 1000LM (11W)



- Color Rendering Index: 90 CRI
- Lamp Equivalent: 65W BR30
- Super Slim, 1" thick with die-cast aluminum frame
- Field-adjustable, 6' max. length Pendant
- 3-Year Warranty
- Black, Bronze, Silver and Matt Gold finishes available
- California Title 24/JA8 Compliant

ORDERING : LCMPD5QPBZ-LU10-TS30

LCMPD5QP

Fixture	Finish	Uplight	Dimming / Voltage	Color Temperature	Mounting
Finish²		Color Temperature		Mounting	
All White	W	2700K (90 CRI)	-TS27⁵	Surface JBox Mount	Blank
All Black	B	3000K (90 CRI)	-TS30	Track - 1 & 2-Circuit/1-Neutral	-1C1N
Silver w/black cord	S⁷	3500K (90 CRI)	-TS35	Track - 2-Circuit/2-Neutral	-2C2N
Bronze w/black cord	BZ⁷	4000K (90 CRI)	-TS40	Track - 3-Circuit/1-Neutral	-3C1N
Matt Gold w/black cord	G⁵	5000K (90 CRI)	-TS50^{5,6}	12" Stem Pendant	-STM12
Matt Gold w/white cord	GW⁵	ColorSelect 2700K/ 3000K/3500K/4000K 5000K (90 CRI)	-TS2750^{5,6}	18" Stem Pendant	-STM18
Uplight		ColorSelect 3000K/ 3500K/4000K (90 CRI)	-TS354⁶	24" Stem Pendant	-STM24
None	Blank			36" Stem Pendant	-STM36
1000lm	-LU10			48" Stem Pendant	-STM48
				96" to 2" Stem Pendant	-STM96ADJ*
Dimming/Voltage³					
ELV-Dimming (120V/277V)	Blank²				
0-10V Dimming (120V/277V)	UE-D10⁴				

² California Title 24/JA8 compliant with (Blank) ELV dimming (120V) only.
³ Requires 4" Octagon Electrical Box, 2-1/8" deep min. to install this luminaire.
⁴ Remote Emergency Battery Back Up Option only available for (UE-D10).
⁵ Special Order. Extended lead time.
⁶ Not available for Uplight.
⁷ Silver and Bronze finish comes standard with Black pendant mounting bracket and cord.
 * Stem height is 96" max. height and field cuttable to 2" min.
 (other custom cuttable heights available. Consult factory)

SPECIFICATION

Application

The 5" LumenPad Square LED Downlight Pendant Mount floats with elegance in contemporary architectural applications, a unique combination of innovative, elegantly minimalist design and high-quality LED performance. The luminaire is perfect for Retrofit, New Construction and Remodel Applications in low to medium height ceilings. Super thin profile is unobtrusive in design and has low glare. Lens is a Polycarbonate Frosted White Lens.

Housing

Die-cast aluminum frame. Optional (-PC) Non-Conductive Polycarbonate is available to minimize the risk of electrical shock from housing.

Mounting:

Universal mounting hardware allows mounting to all standard octagonal electrical junction boxes. White pendant mounting bracket and white field-adjustable cord for White finish. Black pendant mounting bracket and black field-adjustable cord for Black finish. Silver and Bronze finish come standard with Black pendant mounting bracket and black cord. Also available with the following Track Mounting: 1 & 2-Circuit/1-Neutral (-1C1N), 2-Circuit/2-Neutral (-2C2N), 3-Circuit/1-Neutral (-3C1N).

Lumen Maintenance:

Minimum 50,000 hours L70 life based on ANSI TM-21 calculations from LM80 standardized test results.

Electrical Components

Thermal Management:

Effective thermal dissipation facilitated by integral heat sink design for maximum heat rejection to provide long LED life.

Temperature Rating:

Maximum temperature 85°C. Minimum temperature, -20°C.

Driver:

(Blank) Smoothly dims down to 5% with standard Low Voltage dimmers. Works with standard electronic low voltage (ELV) dimmers. Factory qualified for use with Lutron brand dimmers: SELV300P, DVELV-300P, MAELV-600 and NELV-450. (UE-D10) 0-10V dimming works with most 5-wire, 0-10V dimmers. Factory qualified for use with Leviton IP710-DLZ.

Color Temperature:

Available in 2700K, 3000K, 3500K, 4000K, 5000K, ColorSelect 2700K/3000K/3500K/4000K/5000K and ColorSelect 3000K/3500K/4000K, 90 CRI (Color Rendering Index). LED's binned according to ANSI C78 377A for color temperature and chromaticity ranges.

Finishes

High quality powder coat finish for maximum durability. Available in White, Black, Silver, Bronze and Matt Gold.

Certifications and Listings

ETL/cETL listed. Assembled in USA.

SPECIFICATION (Continued)


Caution	Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury.
Warranty	Covered by a 3-Year Warranty to be free of defects in materials and craftsmanship. Recommended for applications where ambient temperatures do not exceed 35°C. installations exceeding this temperature will result in reduced LED lamp life and avoided warranty.
Title 24/JA8 Compliant:	LCMPD5QP-T27 LCMPD5QP-T30 LCMPD5QP-T35 LCMPD5QP-T40 LCMPD5QP-TS354
Ready to Ship Items:	LCMPD5QPW-T-27 LCMPD5QPW-T-30 LCMPD5QPW-T-35 LCMPD5QPW-T-40

LCMPD5QW-TS40 (1000lm, 11W, 4000K, CRI 90)

CANDELA TABULATION

Height	Beam Diameter	FC
8.0'	28.22'	3.76
9.0'	31.75'	2.97
10.0'	35.28'	2.41
11.0'	38.81'	1.99
12.0'	42.33'	1.67

System Power:	11W	MULTIPLIERS	
Test Date:	10/2023	3000K	0.98
Beam Angle 50%:	117.3°	3500K	0.98
Field Angle 10%:	170.2°	4000K	1.00
Color Temperature:	3833K		
CRI:	85.6		
Lumens Delivered:	992		
CBCP:	319.3		
Power Factor:	0.98		

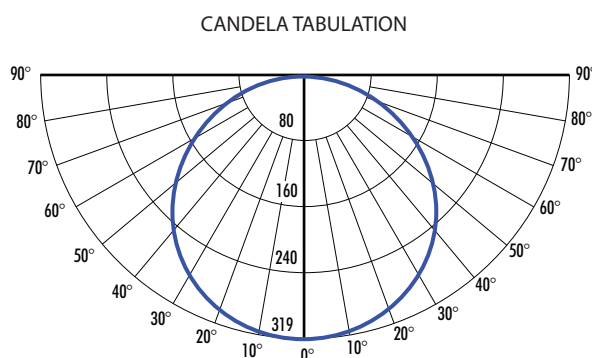

Height	Beam Diameter	FC
8.0'	26.26'	4.99
9.0'	29.55'	3.94
10.0'	32.83'	3.19
11.0'	36.11'	2.64
12.0'	39.40'	2.22